



2VRE15 170A

B22-B0 p


DATA SHEET

release. e - Revision 05-2017

Replace V02-02 p



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	58	0,26	2,0	615	2660	57	L	-20°C / +70°C
230	60	68	0,3	2,0	745	3085	61	L	-20°C / +70°C
230	50				361 CFM				-4°F / 158°F
230	60				438 CFM				-4°F / 158°F



dBA : free blowing



NA : not applicable

ErP 2013

NA

ErP 2015


NA

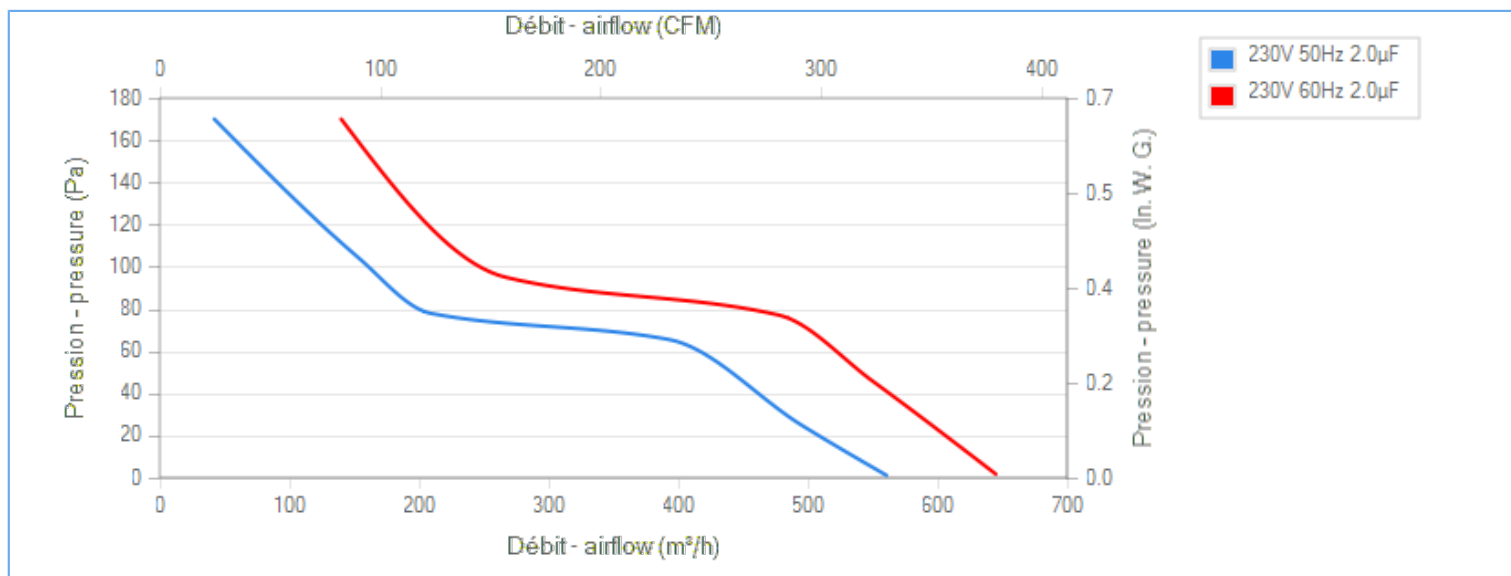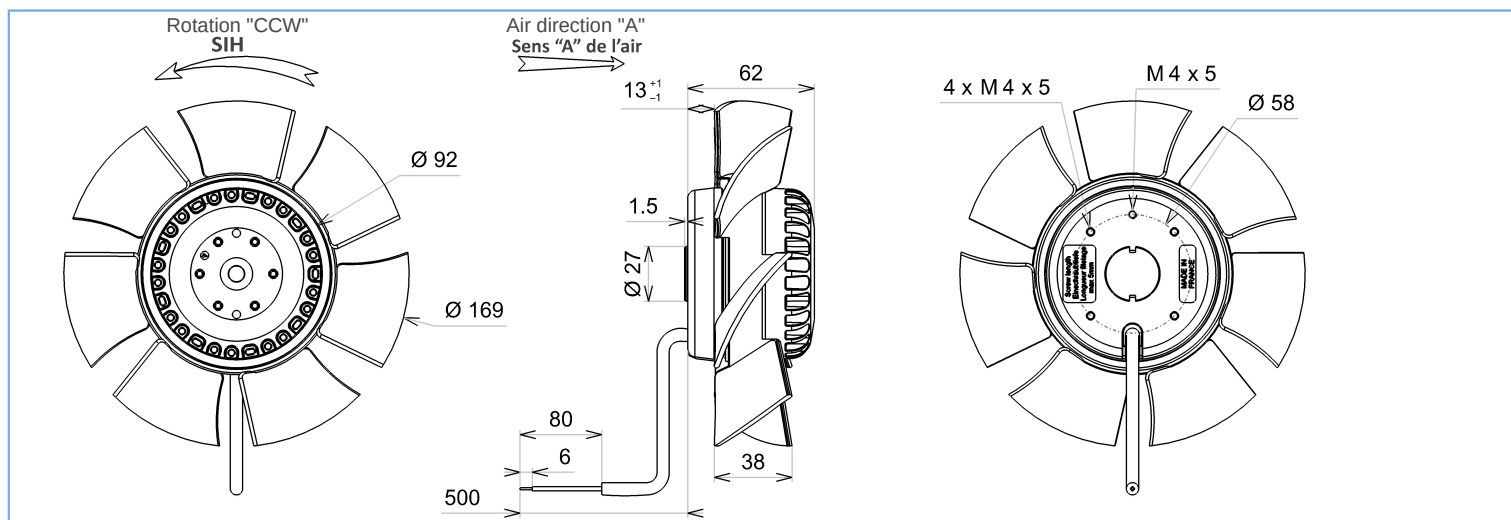

Tested with ECOFIT ring

Description

- .Weight : 1,4 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Plastic impeller PA 6/6
- .Rotor : black paint

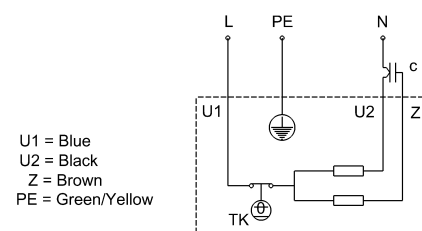



2VRE15 170A

B22-B0 p

Replace V02-02 p

DATA SHEET

release. e - Revision 05-2017



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,063	kW ⁽¹⁾
Airflow	393	m ³ /h ⁽¹⁾
Pressure	66	Pa ⁽¹⁾
Rotation speed	2569	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19008
19008
39658
09172

Measurement setup

V170

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
2RS915CN

