



2VRE15 200A

B22-B2 p

Replace Z21-08 p



DATA SHEET

release. e - Revision 06-2016

Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	66	0,29	2,0	790	2490	60	L	-20°C / +70°C
230	60	80	0,35	2,0	880	2745	63	L	-20°C / +70°C
230	50				465 CFM				-4°F / 158°F
230	60				517 CFM				-4°F / 158°F



dBA : free blowing



NA : not applicable

ErP 2013

NA

ErP 2015


NA

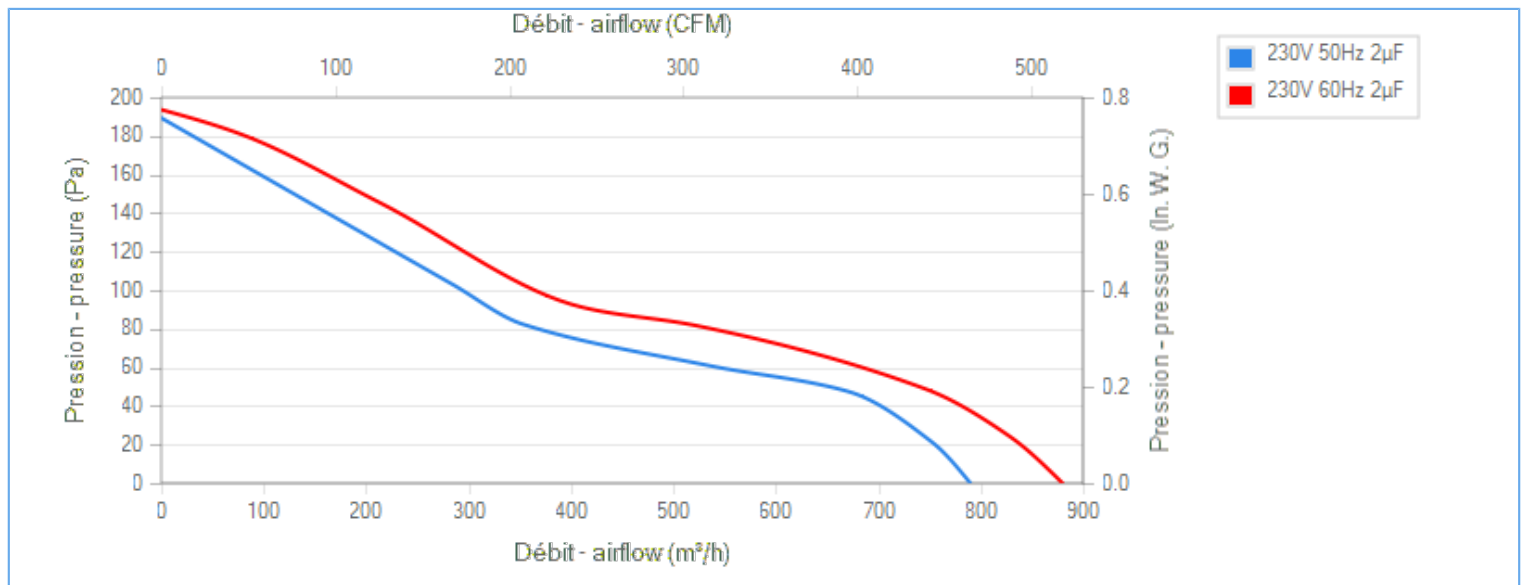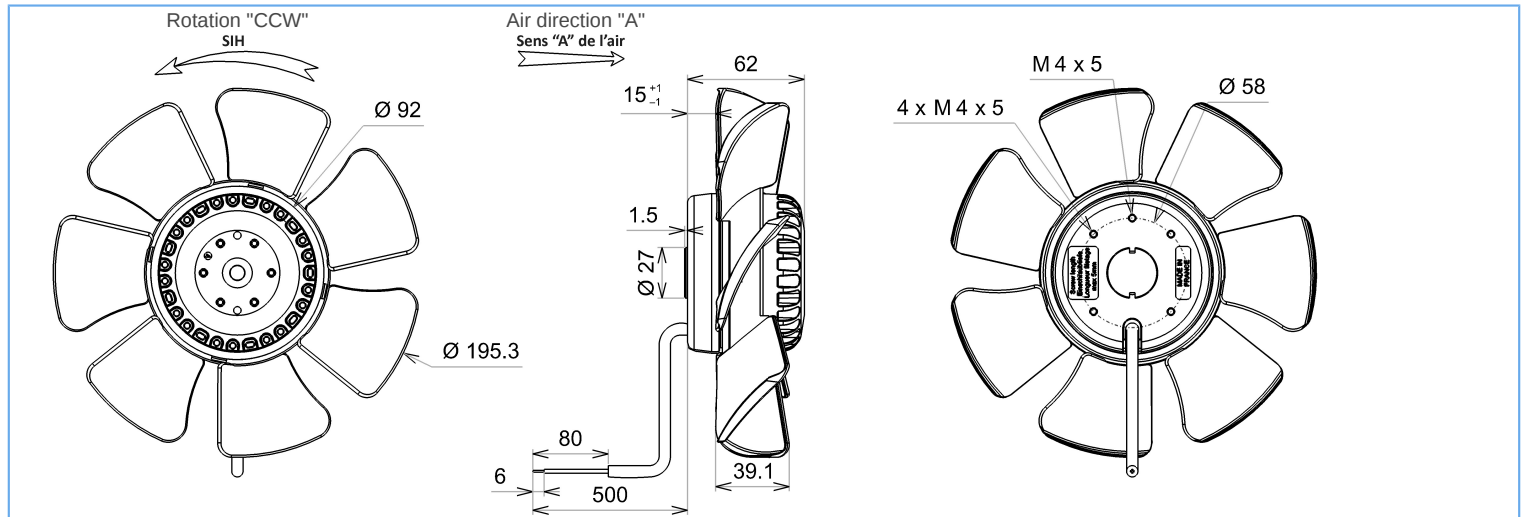

Tested with ECOFIT ring

Description

- .Weight : 1,4 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Plastic impeller PA 6/6
- .Rotor : black paint

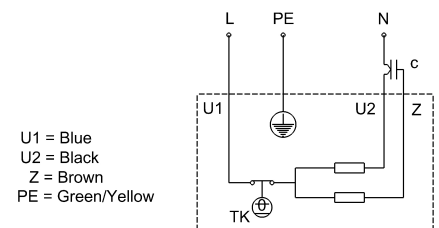



2VRE15 200A

B22-B2 p

Replace Z21-08 p

DATA SHEET

release. e - Revision 06-2016



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,069	kW ⁽¹⁾
Airflow	536	m ³ /h ⁽¹⁾
Pressure	61	Pa ⁽¹⁾
Rotation speed	2444	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19008
19008
39658
09172

Measurement setup

16084 VIROLE V200 RONDE

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes

