



2VRE25 250A

B22-B4 p

Replace Z21-10 p

DATA SHEET

release. e - Revision 05-2016



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	104	0,47	4,0	1665	2725	65	R	-20°C / +70°C
230	60	135	0,59	4,0	1835	3105	68	R	-20°C / +70°C
230	50				980 CFM				-4°F / 158°F
230	60				1080 CFM				-4°F / 158°F

dBA : free blowing




NA : not applicable

ErP 2013

NA

ErP 2015

NA

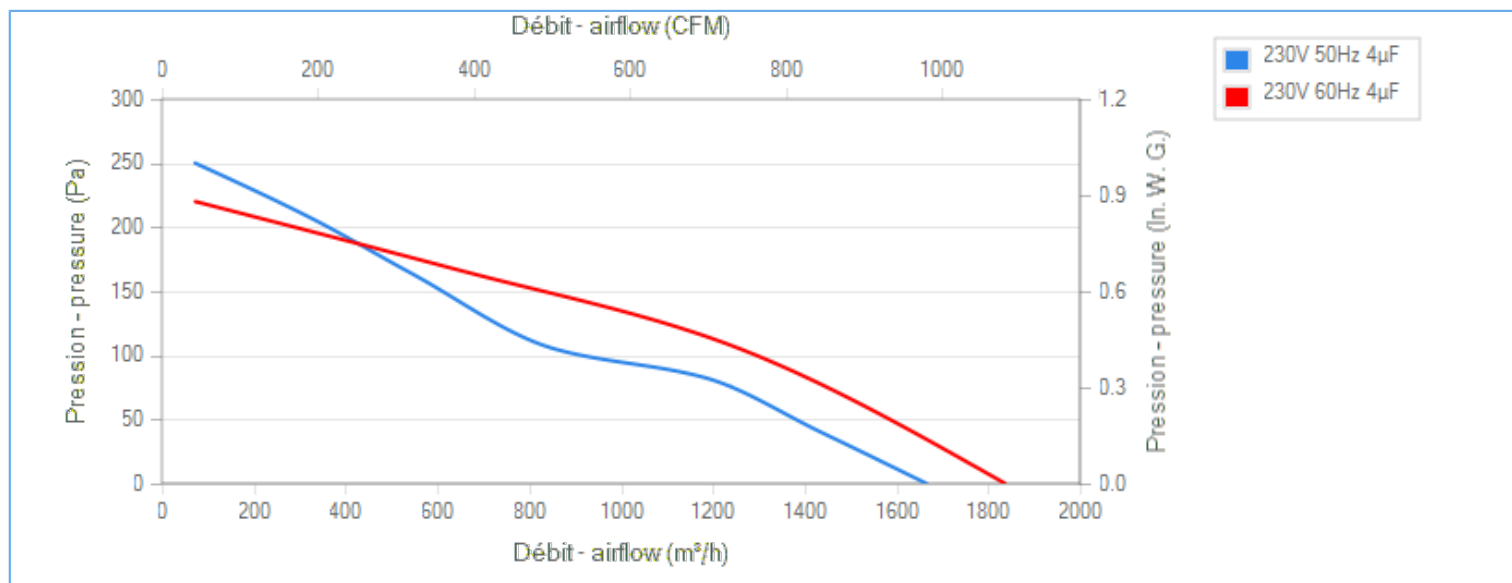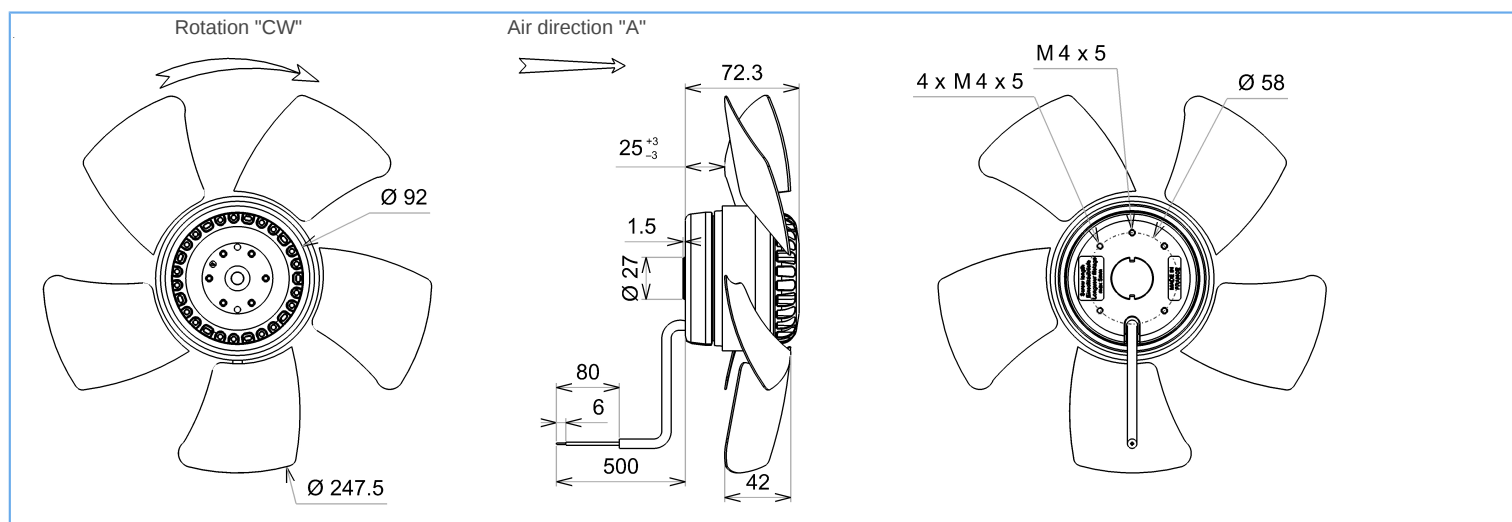


Tested with ECOFIT ring

Description

- .Weight : 1,9 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Zinc coated impeller
- .Rotor and impeller : black paint

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow





2VRE25 250A

B22-B4 p

DATA SHEET

release. e - Revision 05-2016

Replace Z21-10 p



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,117	kW ⁽¹⁾
Airflow	1182	m ³ /h ⁽¹⁾
Pressure	83	Pa ⁽¹⁾
Rotation speed	2095	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19019

19019

39658

09172

Measurement setup

16085 VIROLE V250 RONDE

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
2RS925CN

