



2VREt25 200V

R10-27

DATA SHEET

release. i - Revision 05-2016



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
400	50	72	0,23	-	1020	2795	61	R	-20°C / +70°C
400	60	96	0,18	-	1100	3125	64	R	-20°C / +70°C
400	50				600 CFM				-4°F / 158°F
400	60				647 CFM				-4°F / 158°F



dBA : free blowing



NA : not applicable

ErP 2013

NA

ErP 2015


NA

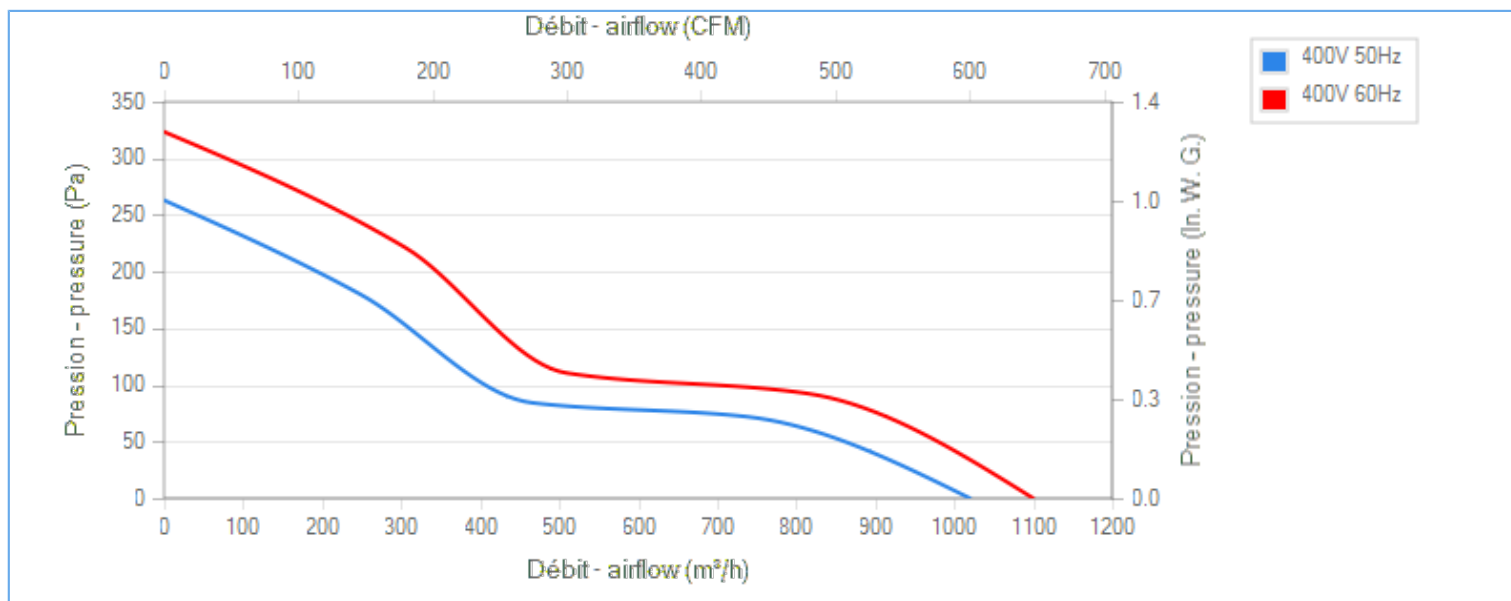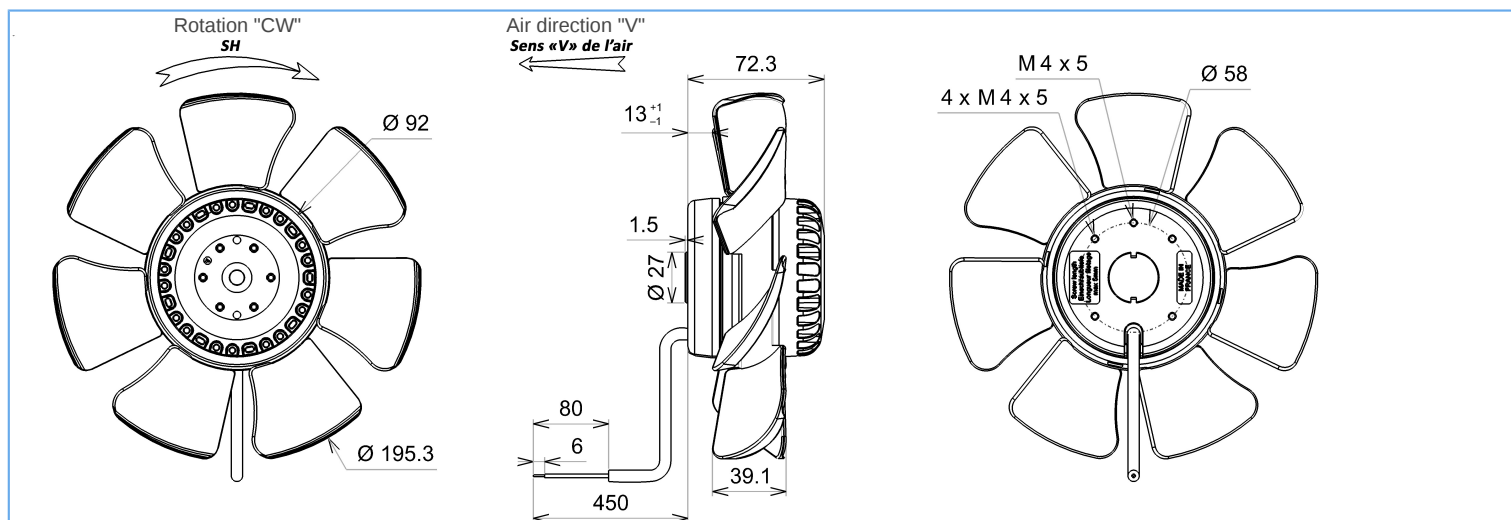

Tested with ECOFIT ring

Description

- .Weight : 1,4 Kg
- .Ball bearing
- .Insulation Class F
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Plastic impeller PA 6/6
- .Rotor : black paint



U = Black
V = Blue
W = Brown
PE = Green/yellow



2VREt25 200V

R10-27

DATA SHEET

release. i - Revision 05-2016



Data in accordance to ErP directive

Voltage	400	V
Frequency	50	Hz
Power	0,082	kW ⁽¹⁾
Airflow	737	m ³ /h ⁽¹⁾
Pressure	72	Pa ⁽¹⁾
Rotation speed	2731	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

-
-
39658
09172

Measurement setup

16084 VIROLE V200 RONDE

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes

