



4GDS25 146x180L

Y43-10 p




Replace Q07-33 p



DATA SHEET

release. h - Revision 11-2019


Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM		Min/Max
230	50	103	0,46	2,5	800	1190	L	-20°C / +70°C
230	60	124	0,54	2,5	825	1220	L	-20°C / +60°C
230	50	470 CFM						-4°F / 158°F
230	60	485 CFM						-4°F / 140°F
NA : not applicable						ErP 2013	NA	ErP 2015
							NA	

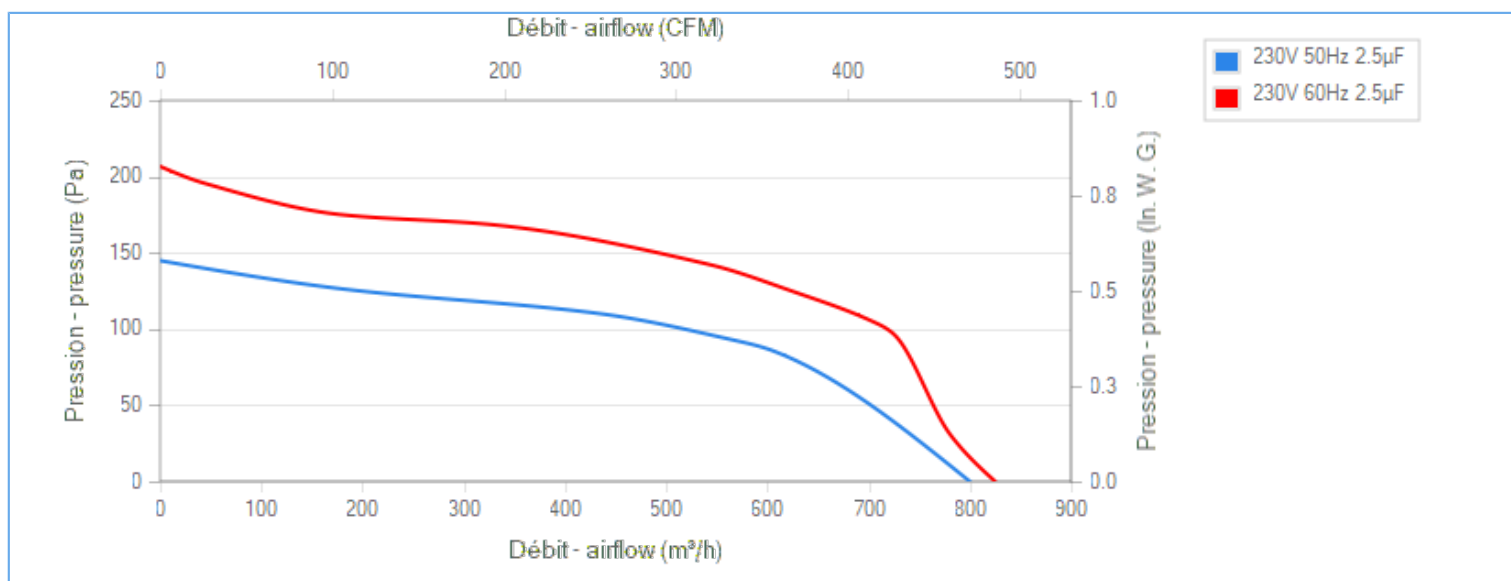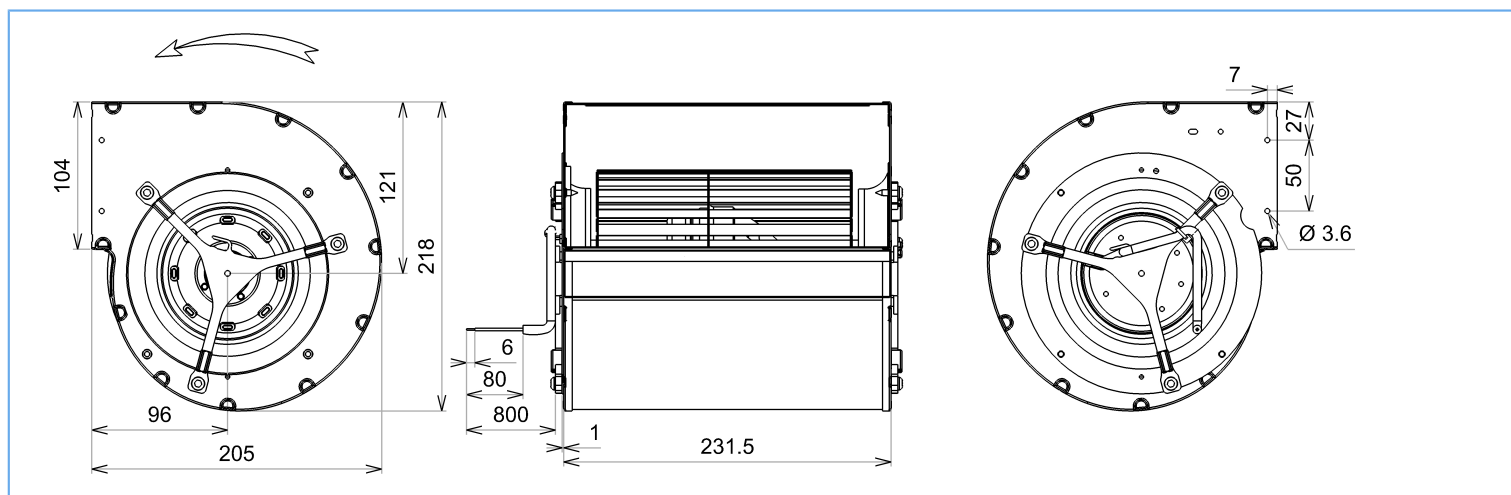

Description

- .Weight : 3,6 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Scroll housing : black paint
- .Galvanized steel impeller

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow





4GDS25 146x180L

Y43-10 p

Replace Q07-33 p

DATA SHEET

release. h - Revision 11-2019

Data in accordance
to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,086	kW ⁽¹⁾
Airflow	561	m ³ /h ⁽¹⁾
Pressure	94	Pa ⁽¹⁾
Rotation speed	1343	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19011
19011
21338

Measurement setup

Contact ECOFIT

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes

