



4GRE25 180x75R

Y41-04 p

DATA SHEET

release. j - Revision 11-2018

Replace N05-64 p



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	80	0,35	2,0	550	950	51	R	-20°C / +70°C
230	60	95	0,42	2,0	550	920	51	R	-20°C / +70°C
230	50				323 CFM				-4°F / 158°F
230	60				323 CFM				-4°F / 158°F

dBA : free blowing




NA : not applicable

ErP 2013

NA

ErP 2015


NA

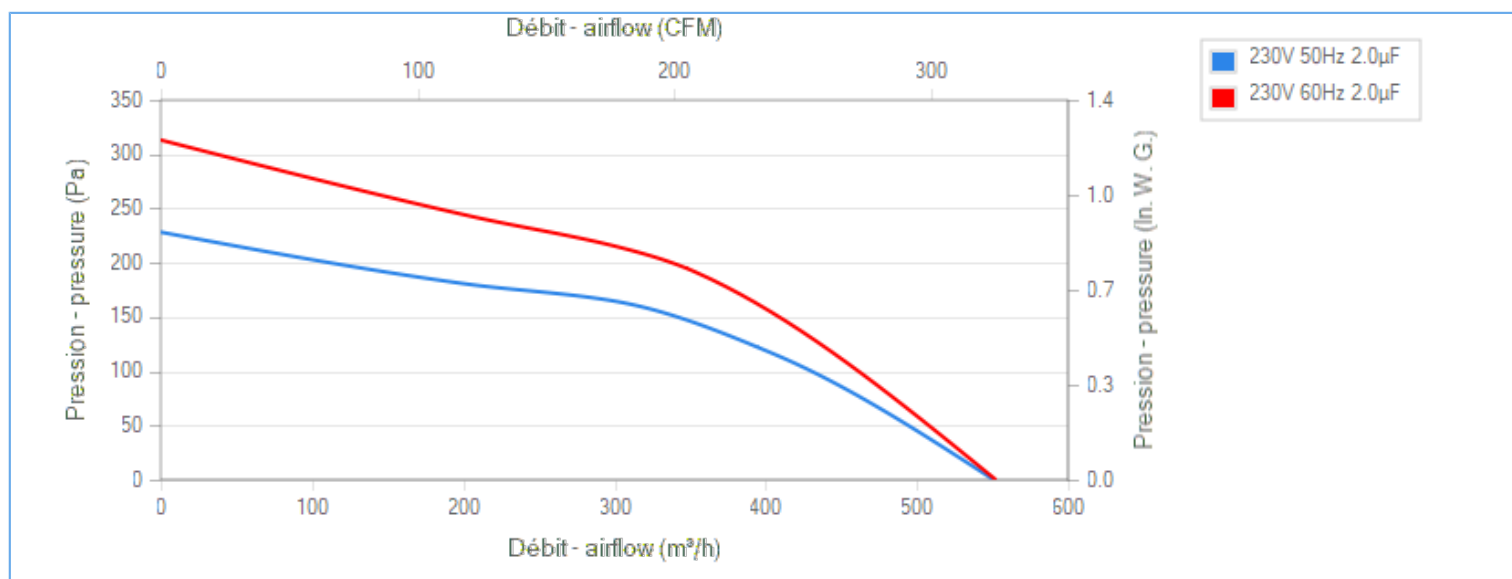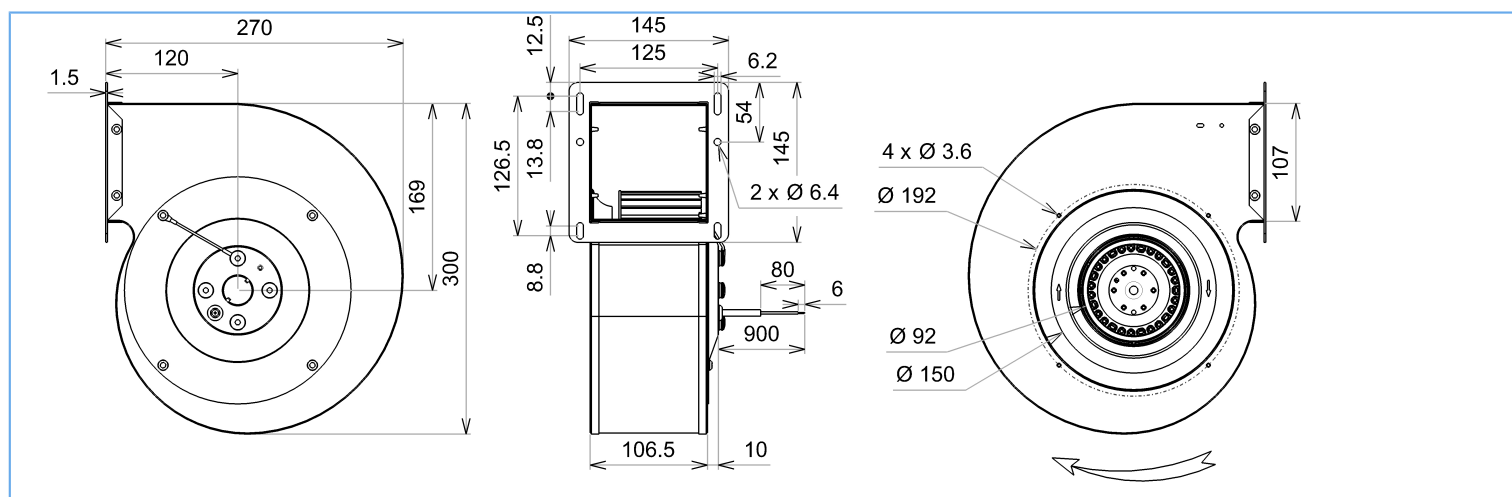

Description

- .Weight : 3,5 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .PP plastic impeller
- .Rotor : black paint
- .Scroll housing : black paint

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow





4GRE25 180x75R

Y41-04 p

Replace N05-64 p

DATA SHEET

release. j - Revision 11-2018

Data in accordance
to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,064	kW ⁽¹⁾
Airflow	301	m ³ /h ⁽¹⁾
Pressure	164,5	Pa ⁽¹⁾
Rotation speed	1261	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19008
19008
21194

Measurement setup

Contact ECOFIT

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
4RS925CN

