



4RRE25 225x63R

B28-A0 p

Replace Z19-01 p

DATA SHEET

release. d - Revision 11-2018



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	52	0,27	1,5	755	1385	53	R	-20°C / +70°C
230	60	55	0,24	1,5	880	1625	56	R	-20°C / +70°C
230	50				444 CFM				-4°F / 158°F
230	60				517 CFM				-4°F / 158°F

dBA : free blowing




NA : not applicable

ErP 2013

NA

ErP 2015


NA

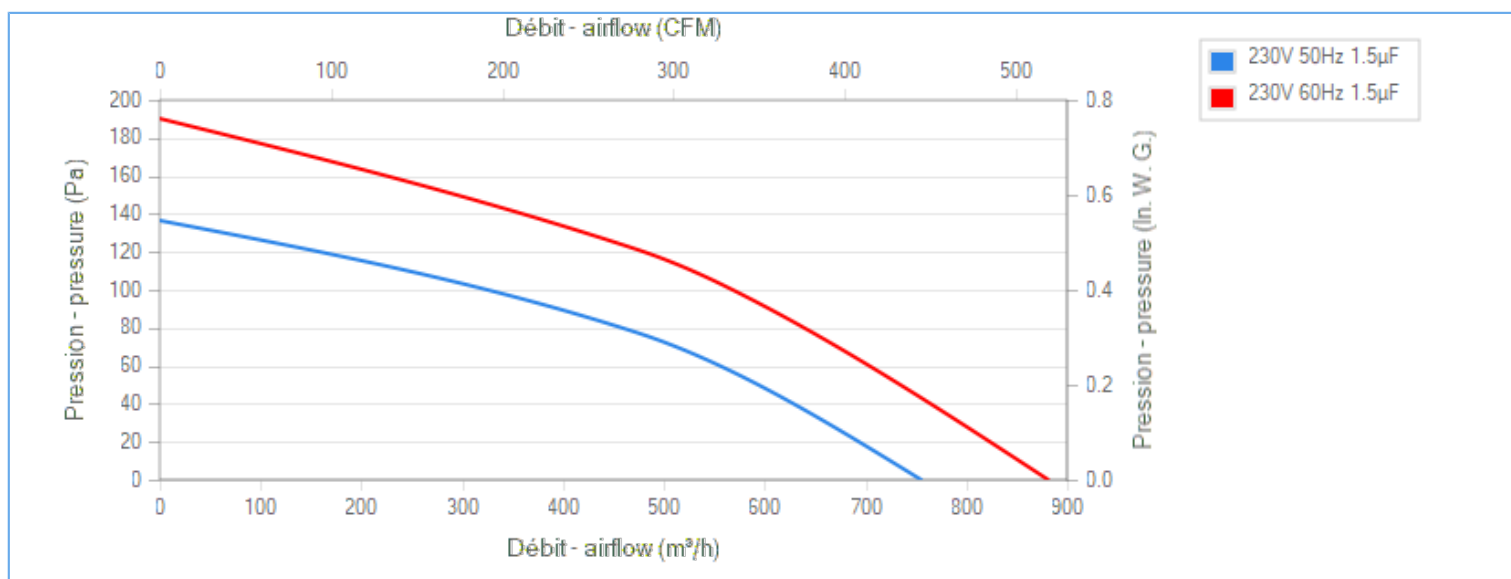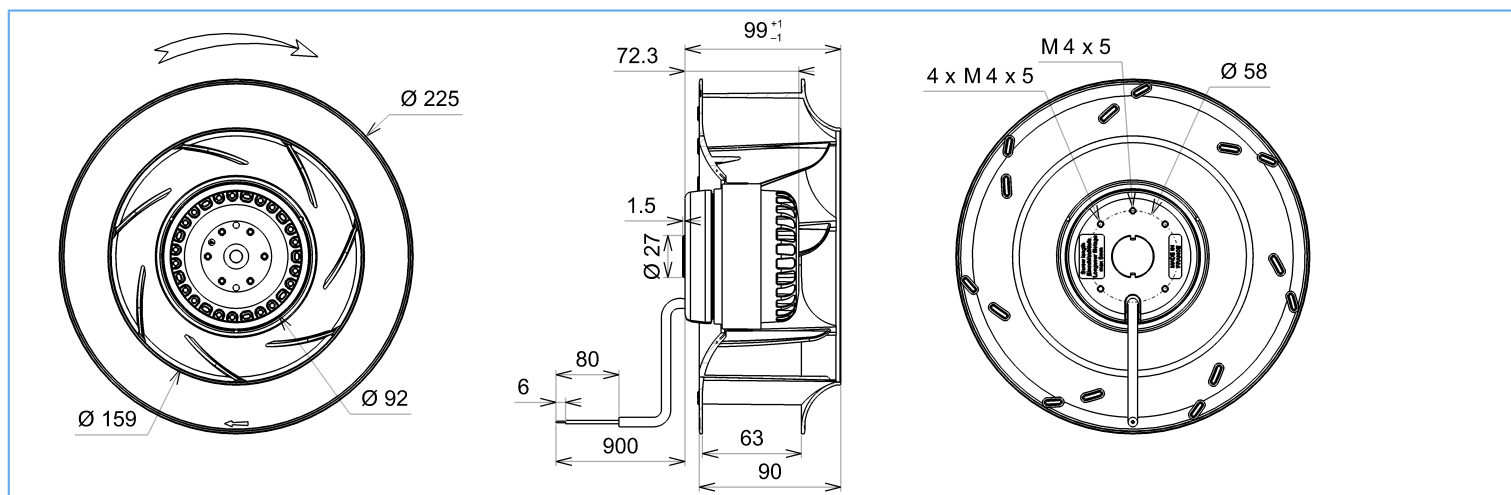

Description

- .Weight : 1,9 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Rotor : black paint
- .PA 6/6 UL 94 V-0 plastic impeller

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow





4RRE25 225x63R

B28-A0 p

Replace Z19-01 p

DATA SHEET

release. d - Revision 11-2018

Data in accordance
to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,053	kW ⁽¹⁾
Airflow	473	m ³ /h ⁽¹⁾
Pressure	78	Pa ⁽¹⁾
Rotation speed	1368	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19005
19005
16214

Measurement setup

O_Sp155

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
4RS925CN

