



4RRE25 250x56R

Z19-02 p

Replace L03-17 p

DATA SHEET

release. e - Revision 09-2017



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	47	0,22	1,5	865	1415	56	R	-20°C / +70°C
230	60	55	0,24	1,5	1010	1665	61	R	-20°C / +70°C
230	50				509 CFM				-4°F / 158°F
230	60				594 CFM				-4°F / 158°F

dBA : free blowing




NA : not applicable

ErP 2013

NA

ErP 2015


NA

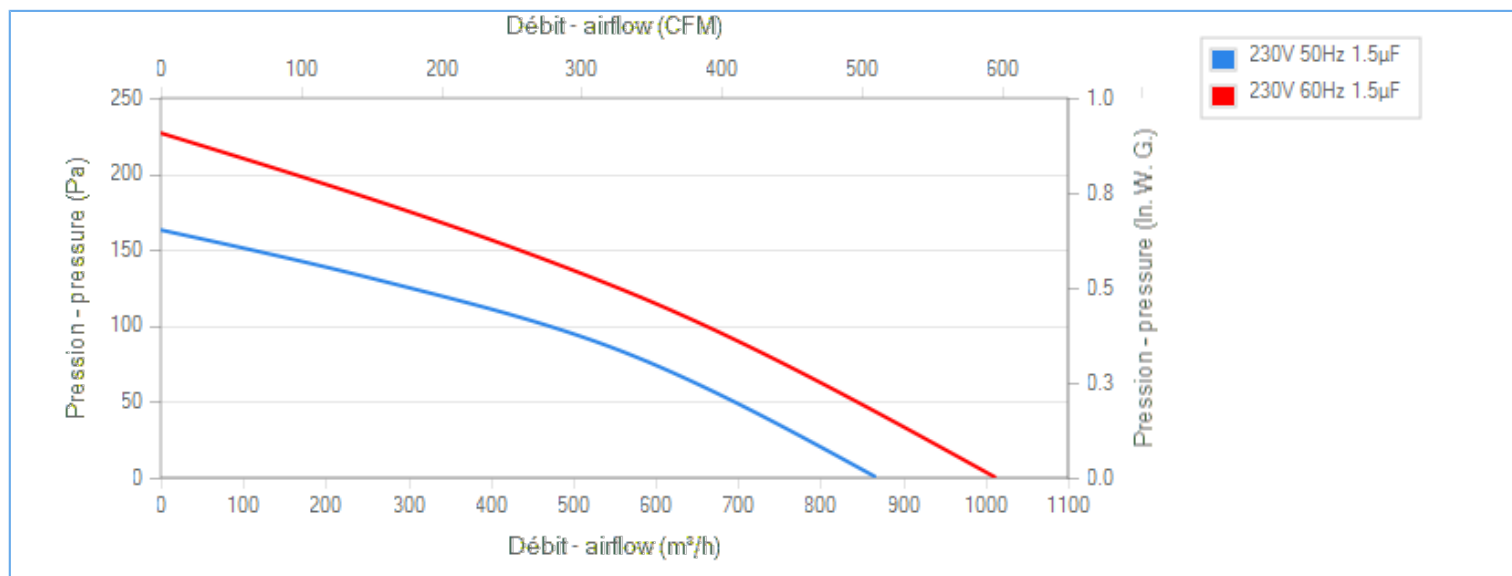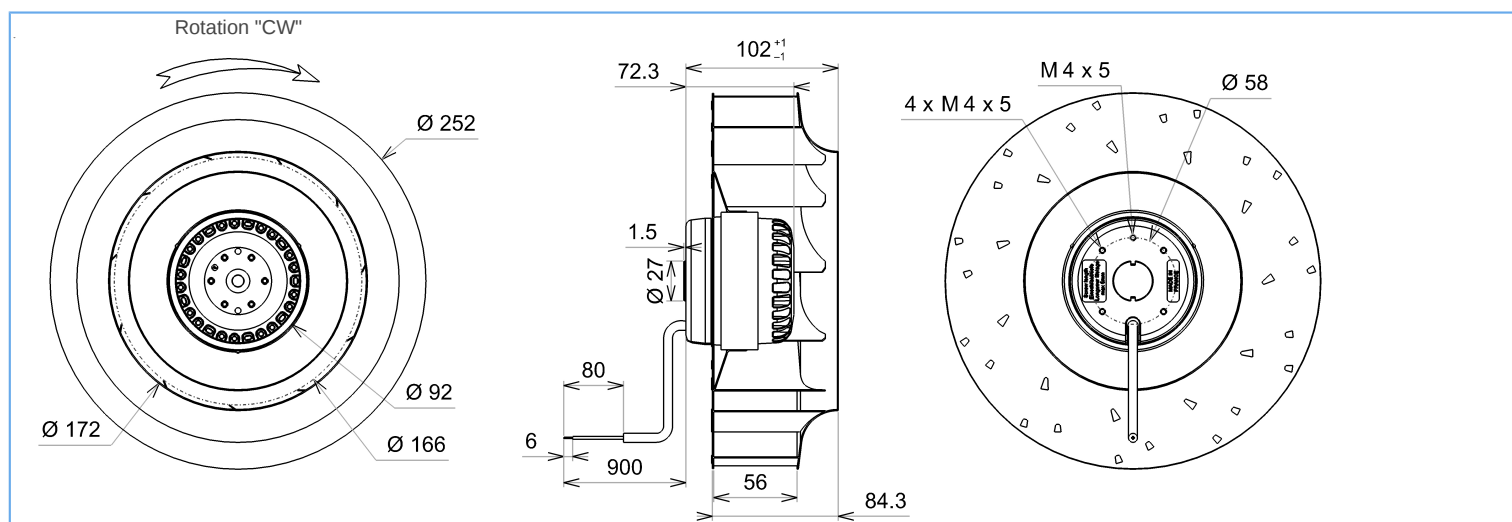

Description

- .Weight : 2,6 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Rotor : black paint
- .Galvanized steel impeller

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow





4RRE25 250x56R

Z19-02 p

Replace L03-17 p

DATA SHEET

release. e - Revision 09-2017

Data in accordance
to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,051	kW ⁽¹⁾
Airflow	530	m ³ /h ⁽¹⁾
Pressure	89	Pa ⁽¹⁾
Rotation speed	1354,5	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19005
19005
21360
16114

Measurement setup

16114 M07-457 PAVILLON Dia Int.164 Ext.255
Galva

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
4RS925CN

