



4VRE15 170V

B22-B9 p


DATA SHEET

release. d - Revision 05-2016

Replace V01-03 p



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	34	0,15	1,5	310	1440	43		-20°C / +70°C
230	60	37	0,17	1,5	380	1700	47		-20°C / +70°C
230	50				182 CFM				-4°F / 158°F
230	60				223 CFM				-4°F / 158°F



dBA : free blowing



NA : not applicable

ErP 2013

NA

ErP 2015


NA

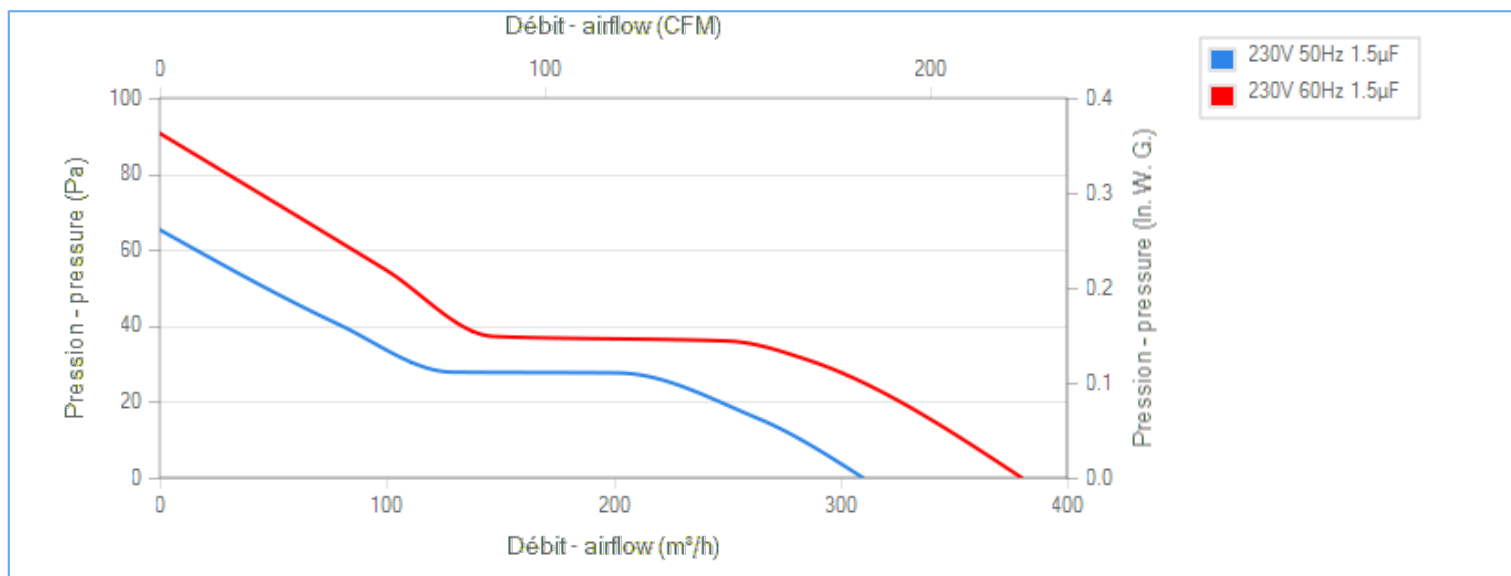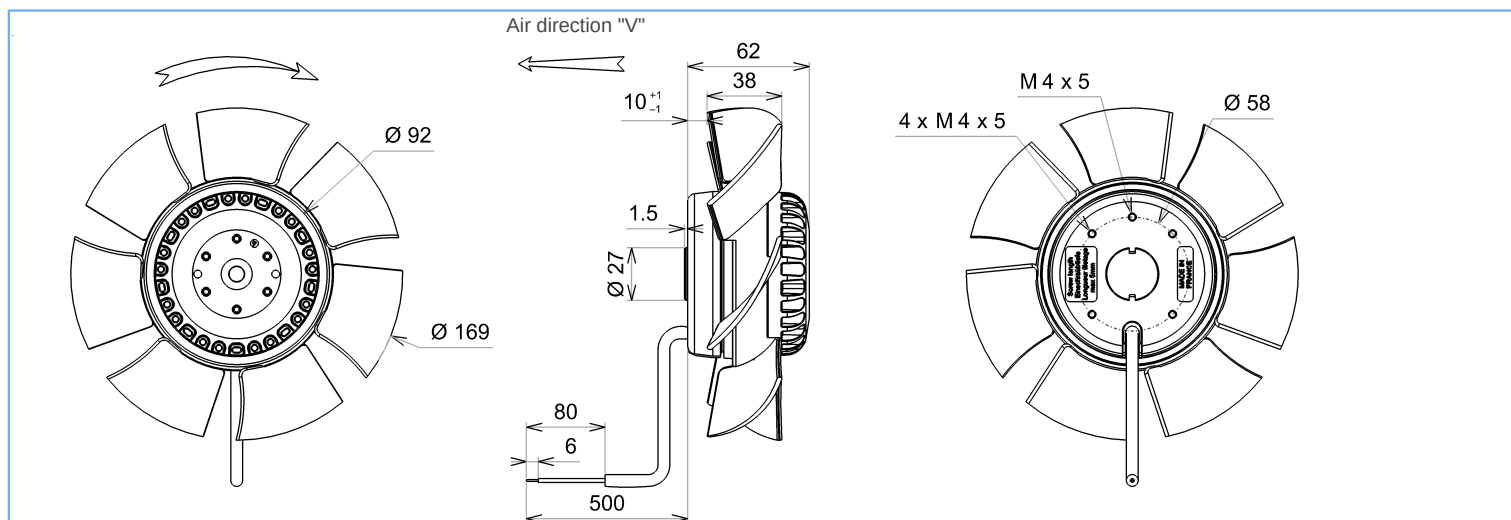

Tested with ECOFIT ring

Description

- .Weight : 1,4 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Plastic impeller PA 6/6
- .Rotor : black paint

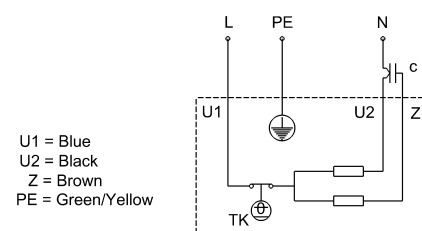



4VRE15 170V

B22-B9 p

Replace V01-03 p

DATA SHEET

release. d - Revision 05-2016



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,035	kW ⁽¹⁾
Airflow	202	m ³ /h ⁽¹⁾
Pressure	28	Pa ⁽¹⁾
Rotation speed	1416	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19005
19005
39658
09172

Measurement setup

16009 OUIE OL 175 GALVA

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes

