



4VRE15 200A

B22-C0 p

Replace P04-10 p

DATA SHEET

release. e - Revision 03-2016



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	29	0,13	1,5	460	1410	46	L	-20°C / +70°C
230	60	29	0,13	1,5	530	1660	48	L	-20°C / +70°C
230	50				270 CFM				-4°F / 158°F
230	60				311 CFM				-4°F / 158°F

dBA : free blowing




NA : not applicable

ErP 2013

NA

ErP 2015


NA

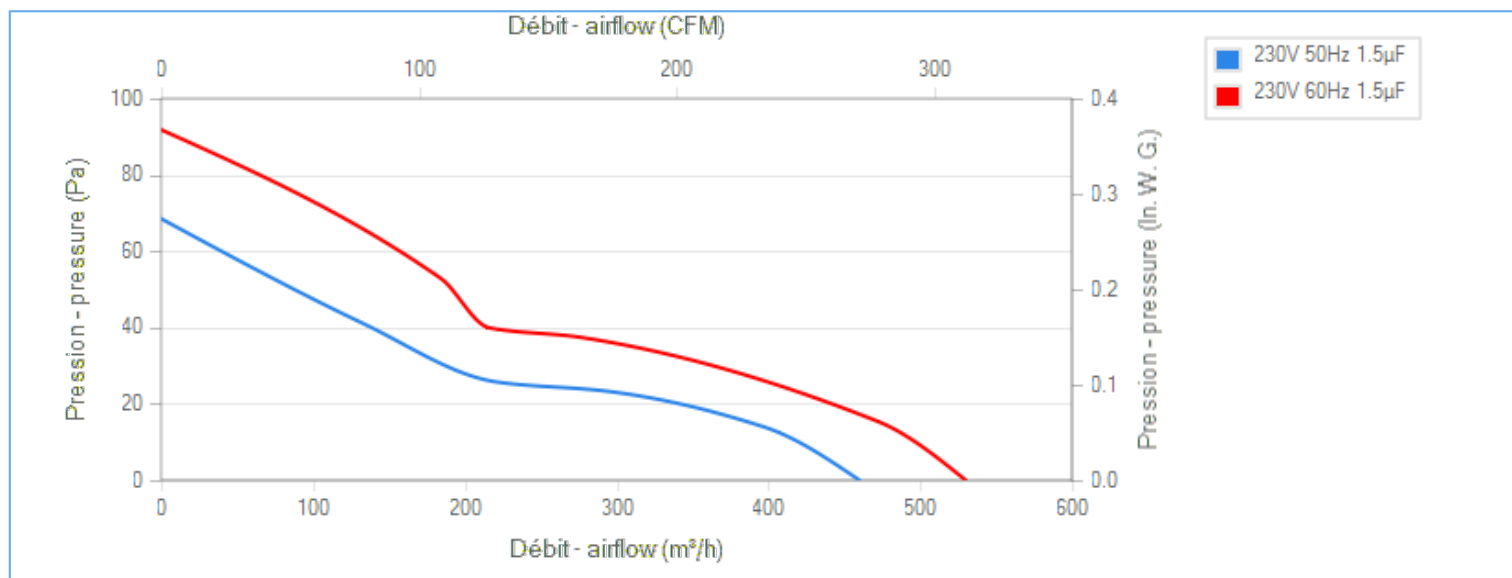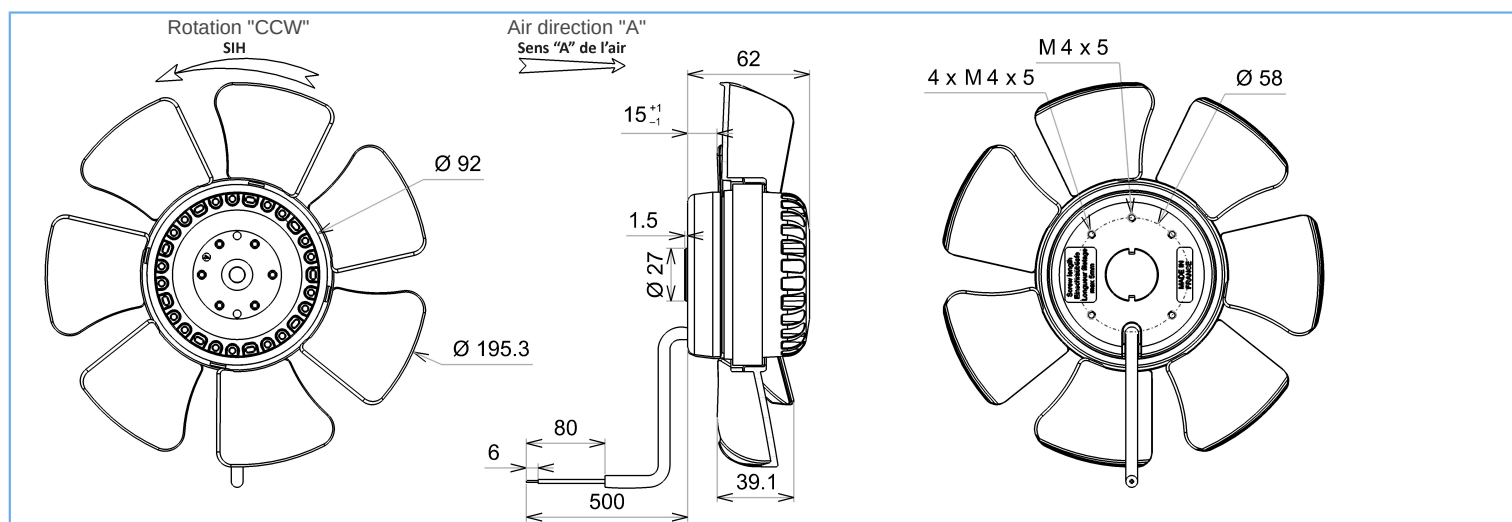

Tested with ECOFIT ring

Description

- .Weight : 1,4 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Plastic impeller PA 6/6
- .Rotor : black paint

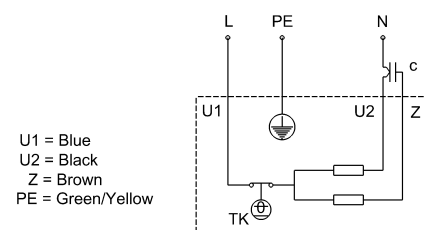



4VRE15 200A

B22-C0 p

Replace P04-10 p

DATA SHEET

release. e - Revision 03-2016



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,029	kW ⁽¹⁾
Airflow	294	m ³ /h ⁽¹⁾
Pressure	23	Pa ⁽¹⁾
Rotation speed	1394	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19005
19005
39658
09172

Measurement setup

16084 VIROLE V200 RONDE

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes

