



4VRE25 250A

B22-C2 p

Replace P04-18 p

DATA SHEET

release. f - Revision 11-2018



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	63	0,28	2,0	1050	1395	52	R	-20°C / +60°C
230	60	72	0,32	2,0	1230	1620	55	R	-20°C / +70°C
230	50				618 CFM				-4°F / 140°F
230	60				723 CFM				-4°F / 158°F

dBA : free blowing




NA : not applicable

ErP 2013

NA

ErP 2015

NA

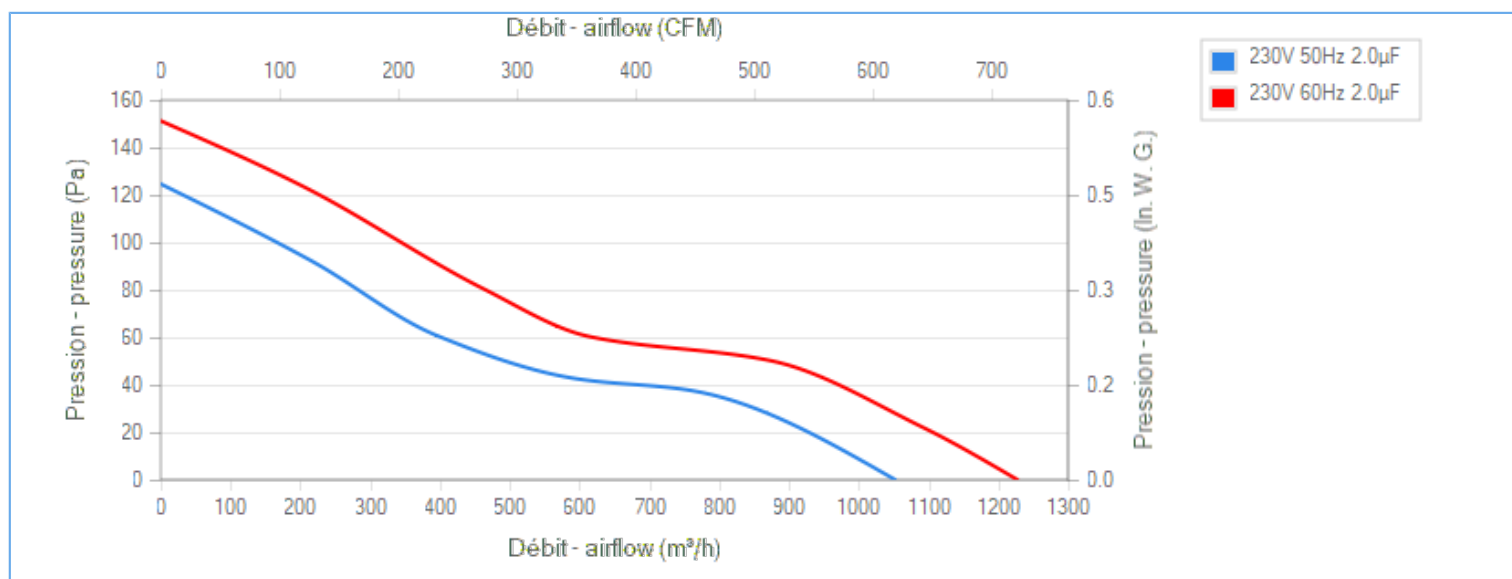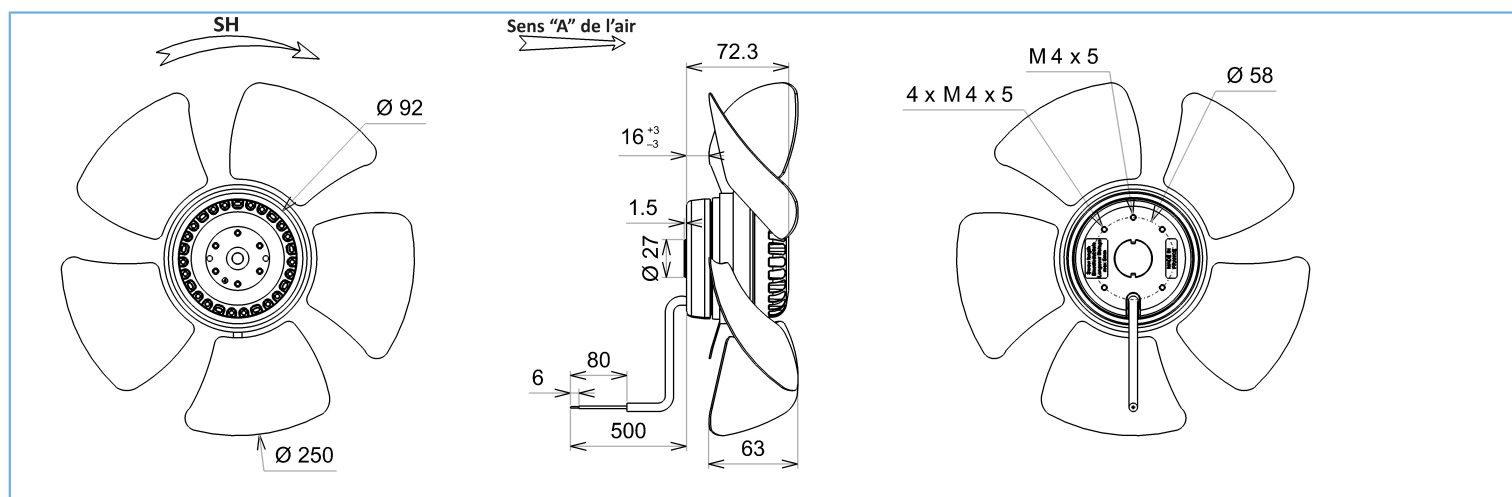


Tested with ECOFIT ring

Description

- .Weight : 1,8 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Zinc coated impeller
- .Rotor and impeller : black paint

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow





4VRE25 250A

B22-C2 p

Replace P04-18 p

DATA SHEET

release. f - Revision 11-2018



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,065	kW ⁽¹⁾
Airflow	760	m ³ /h ⁽¹⁾
Pressure	38	Pa ⁽¹⁾
Rotation speed	1371	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19008
19008
39658
09172

Measurement setup

16085 VIROLE V250 RONDE

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
4RS925CN

