



4VRE35 300A

B22-C4 p

Replace P04-26 p

DATA SHEET

release. e - Revision 05-2019



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	94	0,41	3,0	1865	1310	56	R	-20°C / +50°C
230	60	97	0,45	2,5	1945	1475	59	R	-20°C / +70°C
230	50				1097 CFM				-4°F / 122°F
230	60				1144 CFM				-4°F / 158°F

dBA : free blowing




NA : not applicable

ErP 2013

NA

ErP 2015


NA

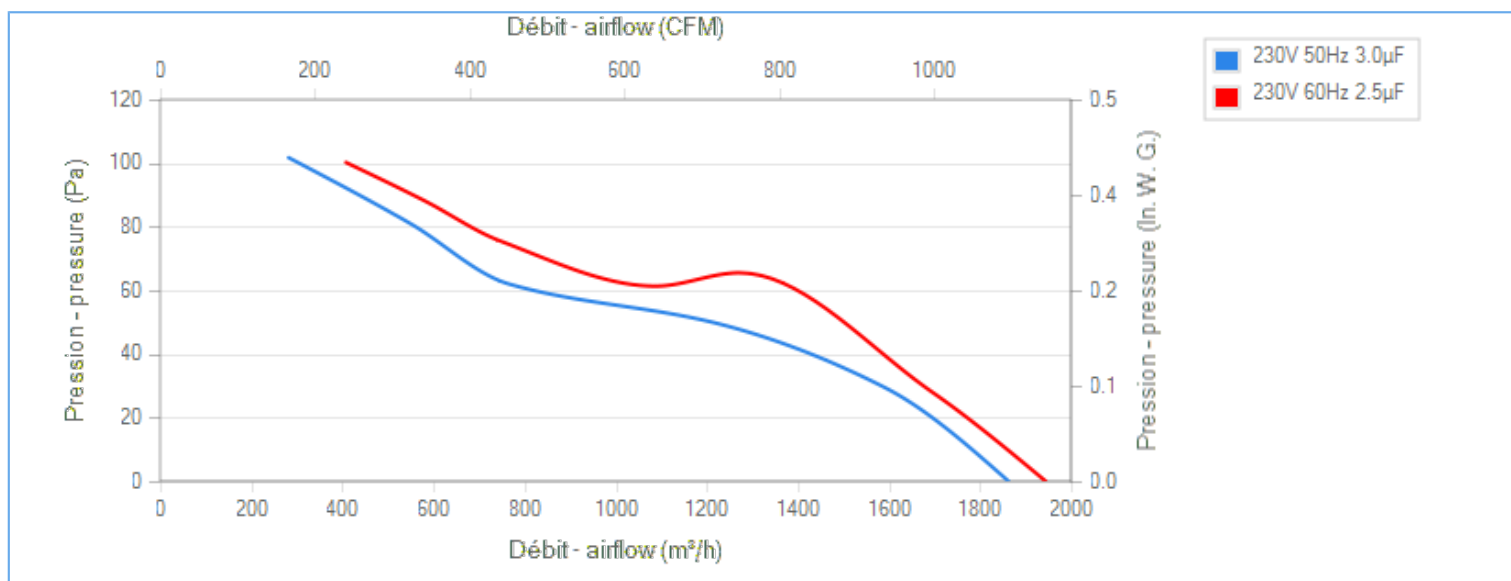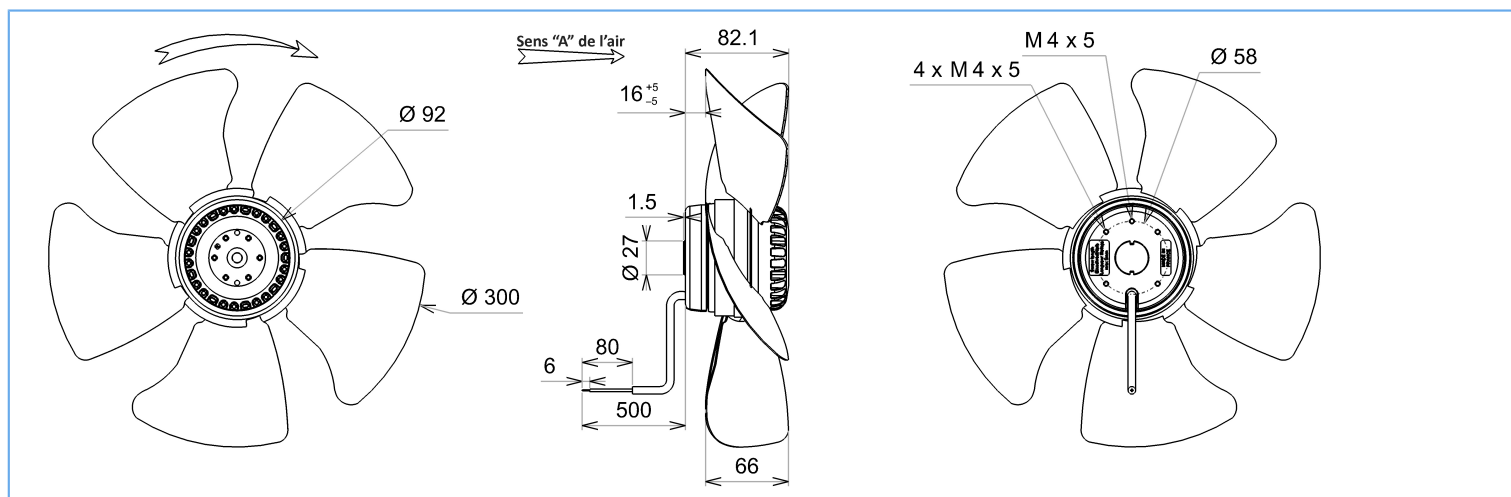

Tested with ECOFIT ring

Description

- .Weight : 2,3 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Zinc coated impeller
- .Rotor and impeller : black paint

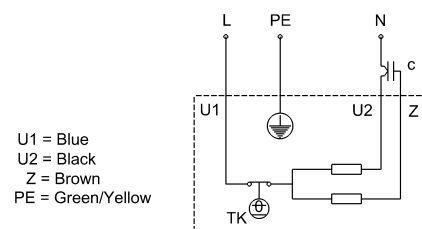



4VRE35 300A

B22-C4 p

Replace P04-26 p

DATA SHEET

release. e - Revision 05-2019



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,099	kW ⁽¹⁾
Airflow	1226	m ³ /h ⁽¹⁾
Pressure	50	Pa ⁽¹⁾
Rotation speed	1265	RPM ⁽¹⁾

(1) at optimal efficiency point

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19012
19011
39658
09172

Measurement setup

16086 VIROLE V300 RONDE

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
4RS935CN

