



4VREt25 250A

R10-34

DATA SHEET

release. f - Revision 11-2016



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
400	50	51	0,15	-	1055	1335		R	-20°C / +60°C
400	60	52	0,13	-	1155	1500		R	-20°C / +70°C
400	50				620 CFM				-4°F / 140°F
400	60				679 CFM				-4°F / 158°F

dBA : free blowing




NA : not applicable

ErP 2013

NA

ErP 2015


NA

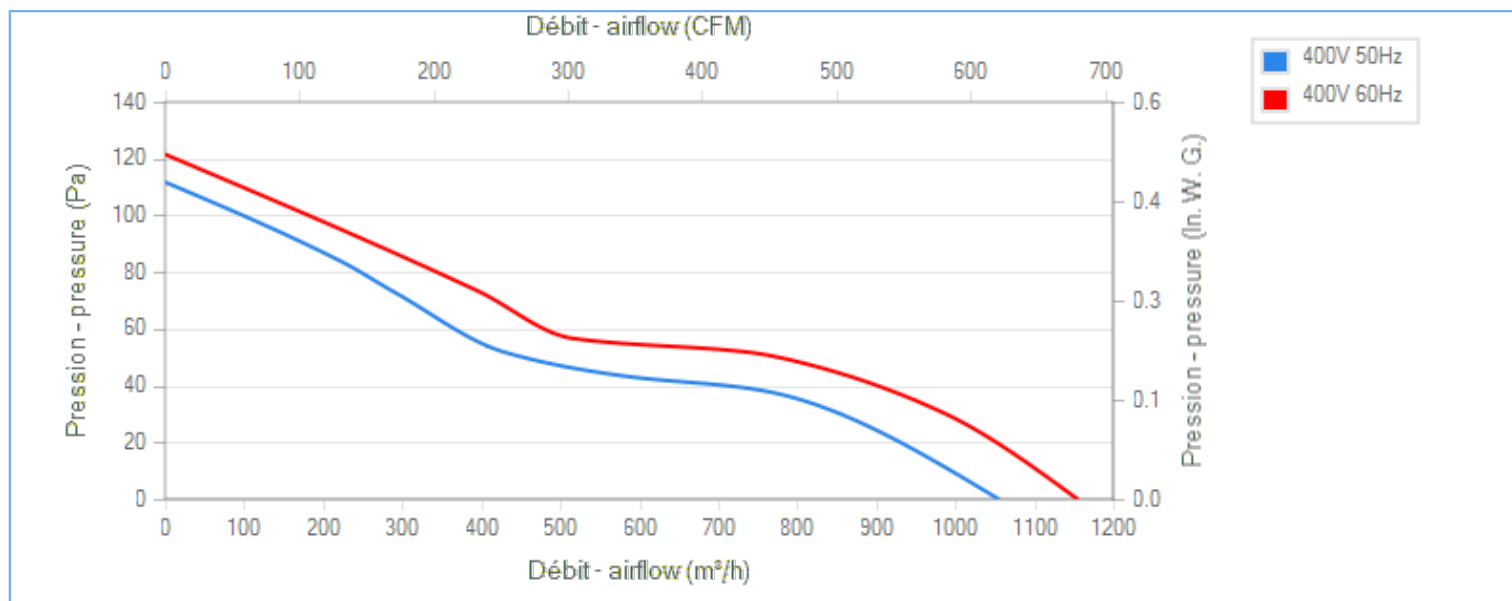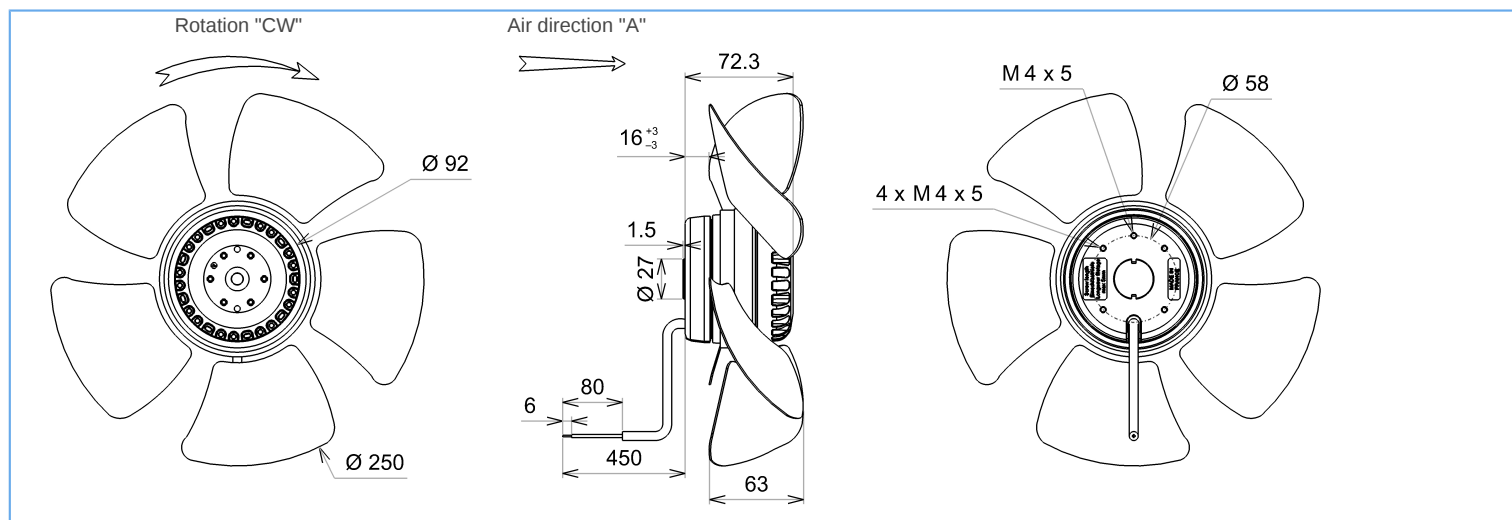

Tested with ECOFIT ring

Description

- .Weight : 1,9 Kg
- .Ball bearing
- .Insulation Class F
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Zinc coated impeller
- .Rotor and impeller : black paint



U = Black
V = Blue
W = Brown
PE = Green/yellow



4VREt25 250A

R10-34

DATA SHEET

release. f - Revision 11-2016



Data in accordance to ErP directive

Voltage	400	V
Frequency	50	Hz
Power	0,053	kW ⁽¹⁾
Airflow	755	m ³ /h ⁽¹⁾
Pressure	38	Pa ⁽¹⁾
Rotation speed	1318	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

-
-
39658
09172

Measurement setup

16085 VIROLE V250 RONDE

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
4RT925CN

