> CONTACT US



FPF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. These units have a flat external profile and a quick snap-on fastening system with elastic hooks. Available in different range of sizes, airflow ratings and configurations.

Technical data			
APPROVALS			
Approvals	CE; UKCA		
PERFORMANCE			
Max Airflow	660/745	m³/h	
	388/438	CFM	
Max Static Pressure	220/222	Pa	
	0.88/0.89	in H2O	
ELECTRICAL DATA			
Rated Voltage	115	V a.c.	
Rated Current	0.96/1.3	А	
Rated Power	107/143	W	
Operating Voltage	103.5-126.5	Va.c.	
Frequency	50/60	Hz	
Appliance Class	I		
Motor Protection	Thermally Protected		
MECHANICAL DATA			
Mounting Wall Thickness	1.5-2.2	mm	
	0.06-0.09	in	
Bearing	Ball Bearing		
GENERIC DATA			
RAL Number	7032		



FPF20KGR115BER-120

standard with fan

> CONTACT US


Technical data			
Life Expectancy	70000	h at 25 °C	
	70000	h at 77 °F	
Airflow Direction	Reverse		
Electrical Connection	Screwless Terminal Block		
Wires Section	0.75-2.5	mm²	
Wires Section	20-14	AWG	
Fan Noise	74.7/78.9	dB(A)	
Filter Class	G3	EN 779	
Filter Class	ISO coarse 55%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP54		
Operating Temperature	-10÷55	°C	
	14÷131	°F	
Storage Temperature	-30÷75	°C	
	-22÷167	°F	




FPF20KGR115BER-120

standard with fan

> CONTACT US

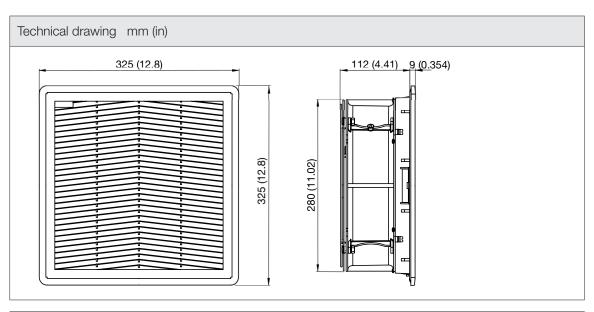

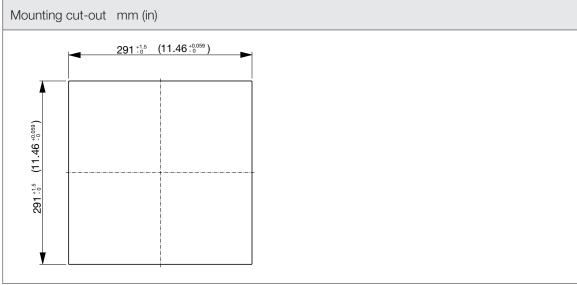



FPF20KGR115BER-120

standard with fan

> CONTACT US

