standard with fan

> CONTACT US



FPF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. These units have a flat external profile and a quick snap-on fastening system with elastic hooks. Available in different range of sizes, airflow ratings and configurations.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	550/610	m³/h
	324/359	CFM
Max Static Pressure	202/215	Pa
	0.81/0.86	in H2O
ELECTRICAL DATA		
Rated Voltage	115	V a.c.
Rated Current	0.72/0.84	А
Rated Power	79/96	W
Operating Voltage	103.5-126.5	V a.c.
Frequency	50/60	Hz
Appliance Class	1	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1.5-2.2	mm
	0.06-0.09	in
Bearing	Ball Bearing	
GENERIC DATA		
RAL Number	7032	



standard with fan


> CONTACT US


Technical data			
Life Expectancy	50000/59000	h at 40 °C	
	50000/59000	h at 104 °F	
Airflow Direction	Reverse		
Electrical Connection	Screwless Terminal Block		
Wires Section	0.75-2.5	mm²	
Wires Section	20-14	AWG	
Fan Noise	66/69	dB(A)	
Filter Class	G3	EN 779	
Filter Class	ISO coarse 55%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP54		
O. and Co. Transport	-10÷55	°C	
Operating Temperature	14÷131	°F	
Storage Temperature	-30÷75	°C	
	-22÷167	°F	



standard with fan

> CONTACT US

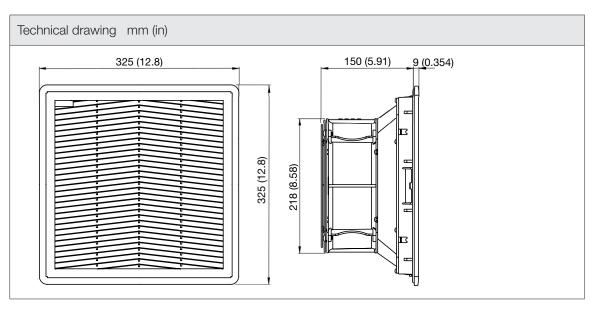

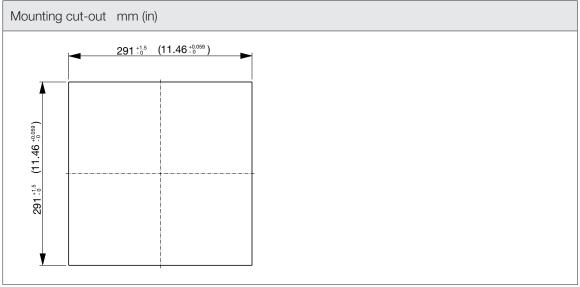



standard with fan

> CONTACT US

