standard with fan

> CONTACT US



FPF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. These units have a flat external profile and a quick snap-on fastening system with elastic hooks. Available in different range of sizes, airflow ratings and configurations.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	350/395	m³/h
	206/232	CFM
Max Static Pressure	110/127	Pa
	0.44/0.51	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.327/0.4	A
Rated Power	75/91	W
Operating Voltage	207-253	V a.c.
Frequency	50/60	Hz
Appliance Class	1	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1.5-2.2	mm
	0.06-0.09	in
Bearing	Ball Bearing	
GENERIC DATA		
Spare Parts Filter Media	M20FPF	
RAL Number	7032	



FPF20KR230BE5-120

standard with fan

> CONTACT US


Technical data			
Life Expectancy	70000	h at 25 °C	
	70000	h at 77 °F	
Airflow Direction	Direct		
Electrical Connection	Screwless Terminal Block		
Wires Section	0.75-2.5	mm²	
Wires Section	20-14	AWG	
Fan Noise	60/62	dB(A)	
Filter Class	G4	EN 779	
Filter Class	ISO coarse 75%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP55		
Operating Temperature	-10÷60	°C	
	14÷140	°F	
Storage Temperature	-30÷70	°C	
	-22÷158	°F	




FPF20KR230BE5-120

standard with fan

> CONTACT US

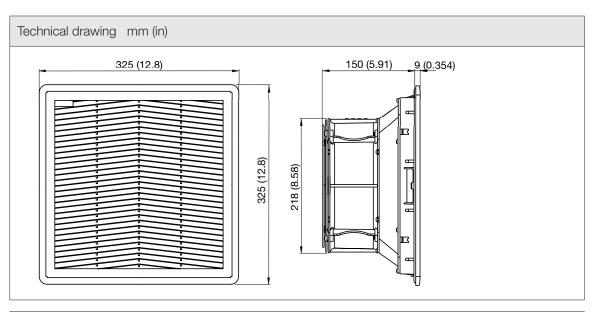

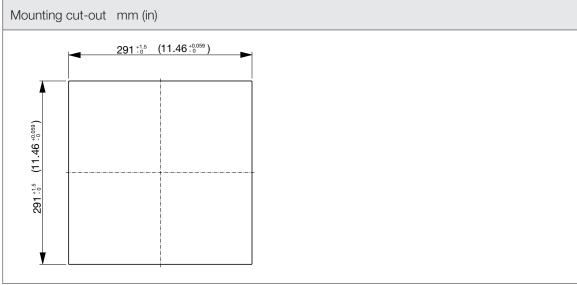



FPF20KR230BE5-120

standard with fan

> CONTACT US

