TP19U230B44

AC

> CONTACT US



TP series roof exhaust units represent an optimal solution for heat dissipation through the top of electrical cabinets. They are ideal for indoor use where there is limited space on the front and side panels. According to the ambient conditions these units can operated with fan (forced air) or without a fan (natural air convection).

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	490/530	m³/h
	288/312	CFM
Airflow with Exhaust Filter	435/475	m³/h
	256/280	CFM
Max Static Pressure	335/449	Pa
	1.34/1.80	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.30/0.36	А
Rated Power	68/82	W
Operating Voltage	207-253	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
GENERIC DATA		
Weight	2.63	Kg
	5.79	lb
RAL Number	7035	
Electrical Connection	Terminal Block	



**TP19U230B44** AC

> CONTACT US


Technical data			
Life Expectancy	62000/70000		
Wires Section	1-4	mm²	
Wires Section	16-12	AWG	
Fan Noise	67.9/71	dB(A)	
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP44		
Operating Temperature	-10÷60	°C	
	14÷140	°F	
Storage Temperature	-20÷60	°C	
	-4÷140	°F	




TP19U230B44

AC

> CONTACT US

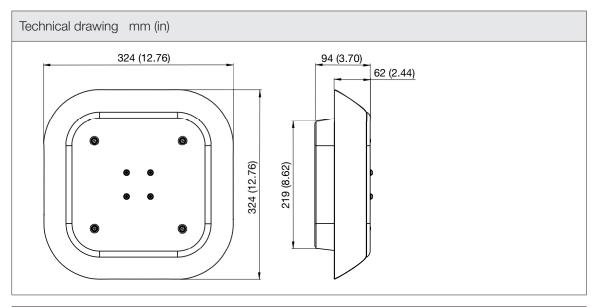

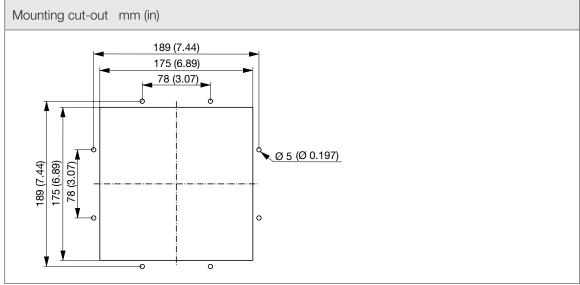



**TP19U230B44** AC

> CONTACT US

