IP55 version with fan

> CONTACT US



FF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Screwless connection, fast tool-free mounting system with clip and maintenance friendliness are the main benefits. Available in a wide range of configurations for both indoor and outdoor use.

Technical data		
APPROVALS		
Approvals	CE; cURus; cULus; cCSAus; UKCA	
PERFORMANCE		
Max Airflow	760/850	m³/h
	447/500	CFM
Airflow with Exhaust Filter	515/570	m³/h
	303/335	CFM
Max Static Pressure	310/305	Pa
	1.24/1.22	in H2O
ELECTRICAL DATA		
Rated Voltage	115	V a.c.
Rated Current	0.93/1.27	А
Rated Power	102/145	W
Operating Voltage	103.5-126.5	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1.3-3.7	mm
	0.05-0.15	in
Bearing	Ball Bearing	



FF20GA115UER1

IP55 version with fan

> CONTACT US


Technical data			
GENERIC DATA			
Spare Parts Filter Media	M20FPF-EU3RM		
Casing Material	PC/ABS UL94 V-0		
RAL Number	7035		
Life Expectancy	53000/78000	h at 25 °C	
	53000/78000	h at 77 °F	
Airflow Direction	Reverse		
Electrical Connection	Screwless Terminal Block		
Wires Section	0.75-2.5	mm²	
Wires Section	20-14	AWG	
Fan Noise	67/71	dB(A)	
Filter Class	G3	EN 779	
Filter Class	ISO coarse 55%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP55		
Operating Temperature	-25÷55	°C	
	-13÷131	°F	
Storage Temperature	-30÷70	°C	
	-22÷158	°F	
UL DATA			
UL File Number Recognized Component	E237844		
UL File Number Listed	E500932		
UL Environmental Type Rating	Type 12		
UL Surrounding Temperature	55	°C	
	131	°F	




FF20GA115UER1

IP55 version with fan

> CONTACT US

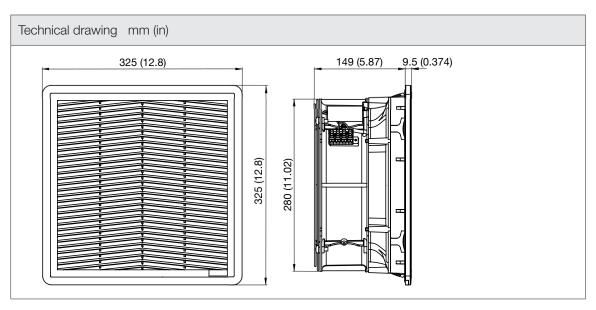

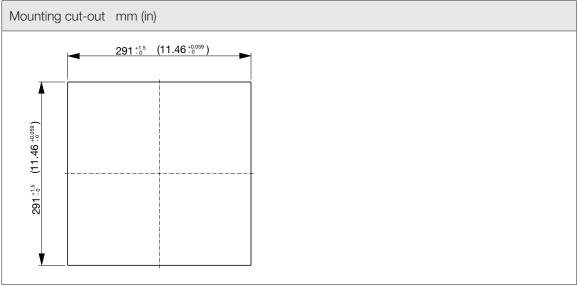



FF20GA115UER1

IP55 version with fan

> CONTACT US

