



2VREt45 300A

N38-A2

DATA SHEET

release. 0 - Revision 12-2014

Replace R10-30



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
400	50	140	0,32	-	2750	2660	67	R	-20°C / +70°C
400	60	198	0,35	-	3025	2920	70	R	-20°C / +70°C
400	50				1618 CFM				-4°F / 158°F
400	60				1780 CFM				-4°F / 158°F





dBA : free blowing

ErP 2013

OK

ErP 2015


OK

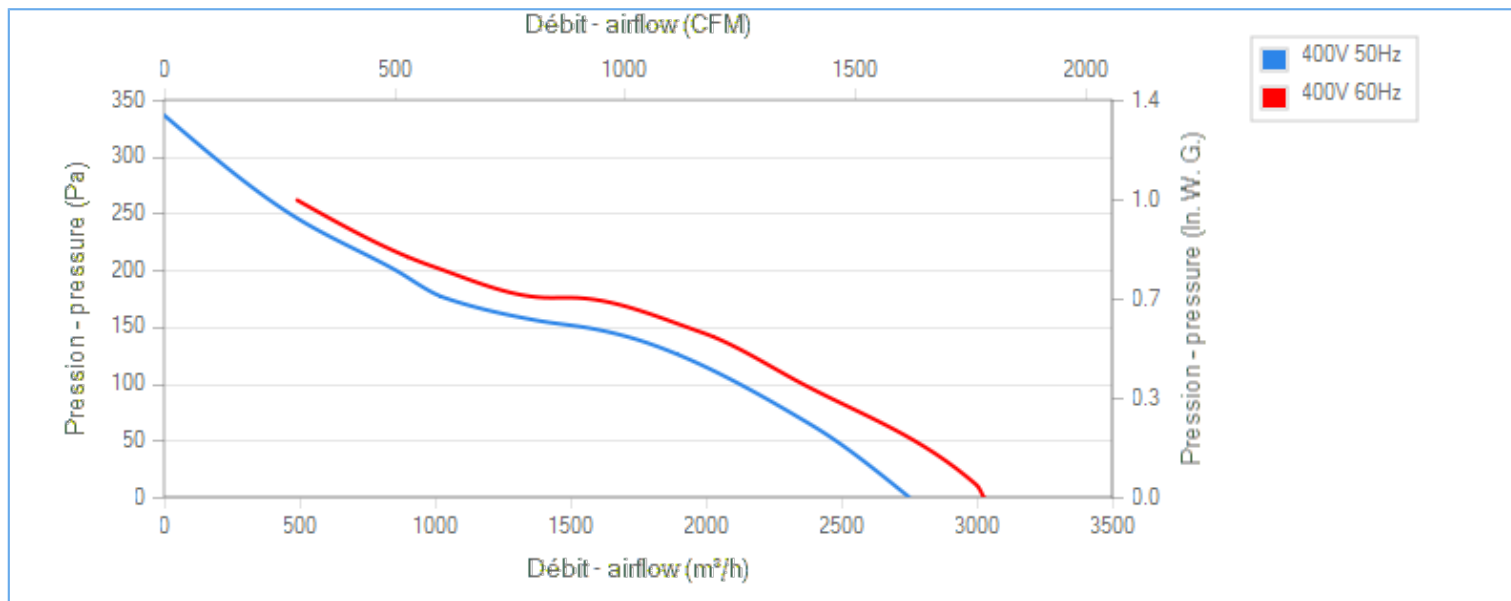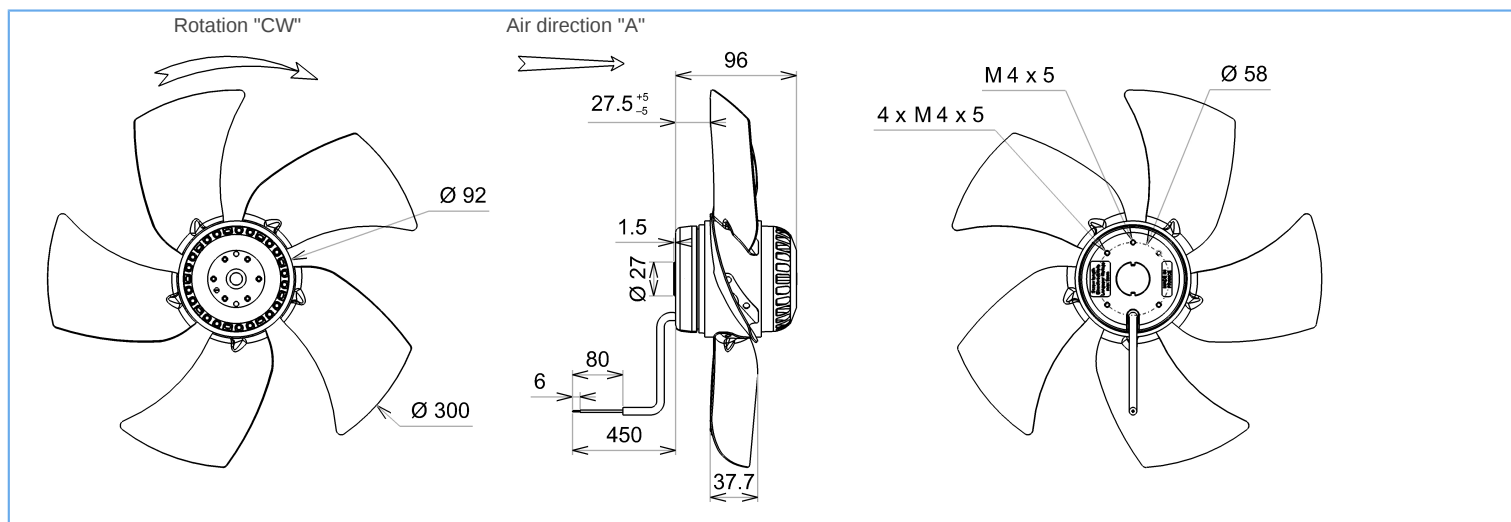

Tested with ECOFIT ring

Description

- .Weight : 2,9 Kg
- .Ball bearing
- .Insulation Class F
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Zinc coated impeller
- .Rotor and impeller : black paint



U = Black
V = Blue
W = Brown
PE = Green/yellow



2VREt45 300A

N38-A2

DATA SHEET

release. 0 - Revision 12-2014

Replace R10-30



Data in accordance to ErP directive

Voltage	400	V
Frequency	50	Hz
Power	0,188	kW ⁽¹⁾
Airflow	1787	m ³ /h ⁽¹⁾
Pressure	136	Pa ⁽¹⁾
Rotation speed	2490	RPM ⁽¹⁾
(1) at optimal efficiency point		

	Actual	Request 2013	Request 2015
Overall efficiency (η)	35,8	25,1	29,1
Efficiency grade	47	36	40
Installation category	A		
Efficiency category	static		
Variable speed drive	No		
Specific ratio	1,00		

Designed for regular application according ErP directive EU 2009/125/EC

Accessories

-
-
39658
09172

Measurement setup

16086 VIROLE V300 RONDE

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes

