HVMS150T-115

ventilated heaters thermally protected metal cover

> CONTACT US



Fandis PTC heaters are used for warming up the air inside enclosure, protecting electrical and electronic components from condensation and corrosion. These H series PTC heaters with builtin fan ensure quick distribution of heat and are available in two versions: in metal or plastic, with low surface thermal conductivity to keep safe maintenance operations.

Technical data		
APPROVALS		
Approvals	CE; cURus; UKCA	
PERFORMANCE		
Heating Power	150	W
ELECTRICAL DATA		
Rated Voltage	115	Va.c.
Operating Voltage	103-126	V a.c.
Frequency	50/60	Hz
Appliance Class	1	
GENERIC DATA		
Casing Material	Black Anodised Aluminium	
Electrical Connection	Terminal Block	
Wires Section	1-2.5	mm ²
Wires Section	20-16	AWG
Fixing System	DIN rail	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP20	
Operating Temperature	-10÷40	°C
	14÷104	°F
Storage Temperature	-40÷70	°C
	-40÷158	°F

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



HVMS150T-115

ventilated heaters thermally protected metal cover

> CONTACT US

Technical data			
UL DATA			
UL File Number Recognized Component	E237844		
UL Surrounding Temperature	40	°C	
	104	°F	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



ANTI-CONDENSATION HEATERS "H" series ventilated

HVMS150T-115

ventilated heaters thermally protected metal cover

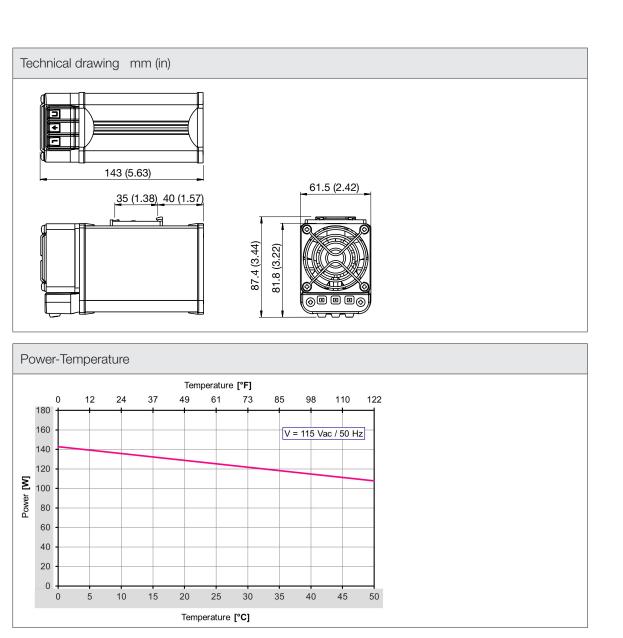


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

