



2RRE45 250x50R

P18-A0 p

DATA SHEET

release. e - Revision 03-2018



Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	153	0,68	6,0	1550	2760	68	R	-20°C / +70°C
230	60	220	0,97	6,0	1765	3140	71	R	-20°C / +70°C
230	50				912 CFM				-4°F / 158°F
230	60				1038 CFM				-4°F / 158°F





dBA : free blowing

ErP 2013

OK

ErP 2015


OK

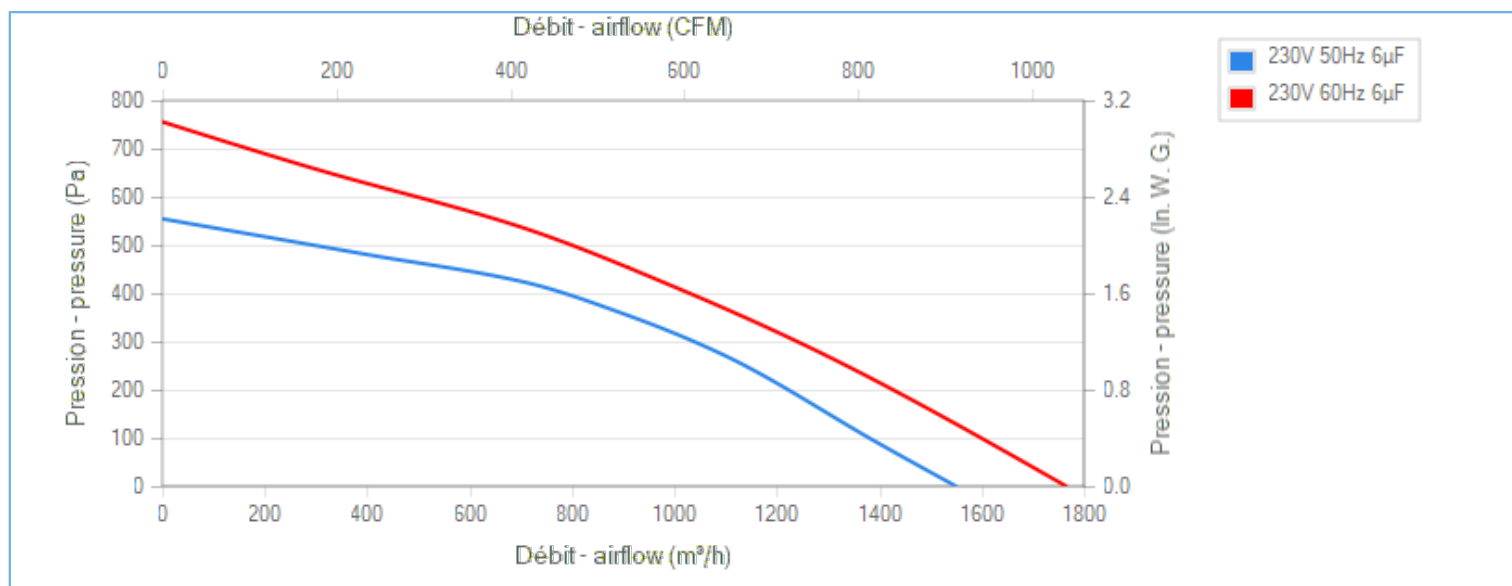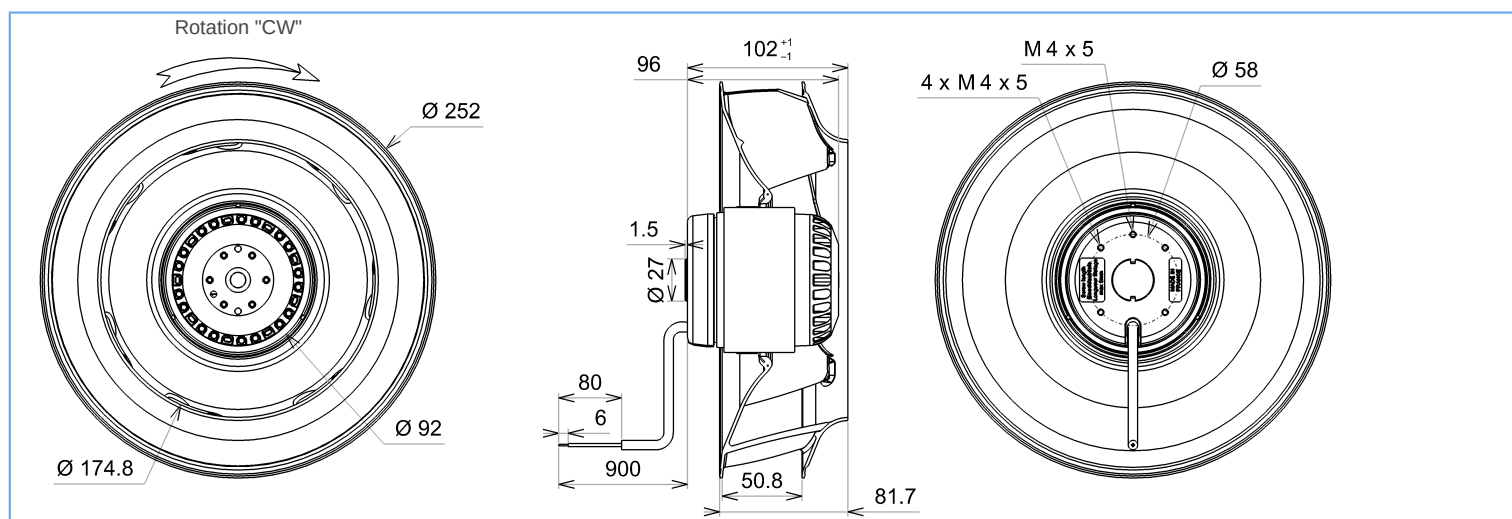

Description

- .Weight : 3,0 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Rotor : black paint
- .PA 6/6 UL 94 V-0 plastic impeller

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow





2RRE45 250x50R

P18-A0 p

DATA SHEET

release. e - Revision 03-2018



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,192	kW ⁽¹⁾
Airflow	900	m ³ /h ⁽¹⁾
Pressure	358	Pa ⁽¹⁾
Rotation speed	2658	RPM ⁽¹⁾

(1) at optimal efficiency point

	Actual	Request 2013	Request 2015
Overall efficiency (η)	46,6	40	44
Efficiency grade	65	58	62
Installation category	A		
Efficiency category	static		
Variable speed drive	No		
Specific ratio	1,00		

Designed for regular application according ErP directive EU 2009/125/EC

Accessories

19016
19016
16234
21360

Measurement setup

16234

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes

