

TRAVERSA DI IRRIGIDIMENTO *Stiffening crosspiece*



75

S


V

I

Z

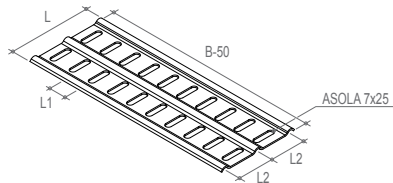

CE



S	V	I	Codice/ Code	S mm	Δ kg/pz
A3	□		75XXX100H	1,2	0,04
A3	□		75XXX150H	1,2	0,08
A3	□		75XXX200H	1,2	0,12
A3	□		75XXX300H	1,2	0,20
A3	□		75XXX400K	1,5	0,36
A3	□		75XXX500K	1,5	0,46
A3	□		75XXX600K	1,5	0,56

□ Scegli il materiale/ Choose the material

B mm	H mm	L mm	L1 mm	L2 mm	
100	5	96	25	43	
150	5	96	25	43	
200	5	96	25	43	
300	5	96	25	43	
400	5	96	25	43	
500	5	96	25	43	
600	5	96	25	43	

Δ kg/pz	S mm	Z	Codice/ Code
0,04	1,2	A3 Z	75XXX100H
0,09	1,2	A3 Z	75XXX150H
0,13	1,2	A3 Z	75XXX200H
0,22	1,2	A3 Z	75XXX300H
0,38	1,5	A3 Z	75XXX400K
0,49	1,5	A3 Z	75XXX500K
0,60	1,5	A3 Z	75XXX600K