

Resisto HE


Resisto 1500 HE IP66 7100lm 840 EM

0010272



Caratteristiche prodotto

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 7100lm; 50W; 142lm/W; 4000K; SDCM<3; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark; 3-hour maintained emergency batteries.

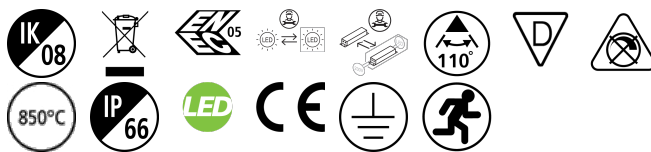

PANORAMICA DEL PRODOTTO

Nome prodotto	Resisto 1500 HE IP66 7100lm 840 EM
Tecnologia	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montaggio	Ceiling surface mounting, Sospensione (2, 000mm), Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
Garanzia	5 years
Fixture luminous flux (lm)	7100
Luminaire efficacy (lm/W)	142
Temperatura di colore (K)	4000
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	110
Glare control	< 25
Gruppo di rischio fotobiologico	RG1
Luminous flux (emergency) (lm)	760
Flusso luminoso (emergenza) (lm)	760
Potenza totale (W)	50
Electrical protection	Classe I
Tipologia reattore	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Colore corpo lampada	Grigio
IP rating	IP66
IK rating	IK08
Product EAN number	5410288102726

Resisto HE

Resisto 1500 HE IP66 7100lm 840 EM
0010272

TABELLA DATI

Dati generali

Nome prodotto	Resisto 1500 HE IP66 7100lm 840 EM
Tecnologia	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montaggio	Ceiling surface mounting, Sospensione (2, 000mm), Wall surface mounted
General application	Logistics & Industry
Operating temperature range (°C)	5°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Garanzia	5 years

Dati ottici

Fixture luminous flux (lm)	7100
Luminaire efficacy (lm/W)	142
Temperatura di colore (K)	4000
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 25
Gruppo di rischio fotobiologico	RG1
Luminous flux (emergency) (lm)	760
Flusso luminoso (emergenza) (lm)	760
Emergency duration (h)	3

Dati elettrici

Potenza totale (W)	50
Tensione di rete (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Classe I
Tipologia reattore	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Corrente di spunto (A)	15
Durata picco di corrente (µs)	100
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz

Resisto HE

Resisto 1500 HE IP66 7100lm 840 EM

0010272

LED Flickering Rate	Ultra low (5% or less)
Quantità max. apparecchi per interruttore 10A tipo C	30
Max. Luminaires per 13A C Breaker	39
Quantità max. apparecchi per interruttore 16A tipo C	48
Max. Luminaires per 20A C Breaker	60
Max. Luminaires per 10A B Breaker	30
Max. Luminaires per 13A B Breaker	39
Max. Luminaires per 16A B Breaker	48
Max. Luminaires per 20A B Breaker	60

Dati vita utile

Vita utile nominale - L70 B50	100000
Vita utile nominale - L80 B20	69000
Vita utile nominale - L90 B10	31000

Dati dimensionali

Colore corpo lampada	Grigio
IP rating	IP66
IK rating	IK08
Diffuser finish	Smerigliato
Diffuser material	PC Polycarbonate
Lunghezza nominale del prodotto (mm)	1500
Larghezza nominale prodotto (mm)	87
Nominal Product Height (mm)	80
Peso (Kg)	2.58

Dati di imballo





Tipologia imballo singolo	Carton
Product EAN number	5410288102726
Lunghezza imballo singolo (mm)	150.5
Larghezza imballo singolo (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (outer)	05410288102726
Quantità per imballo esterno	1
Packaging outer length / height (cm)	150.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	8.5

Dati di sicurezza

Temperatura ottimale di utilizzo (°C)	5-40
---------------------------------------	------

FOTOMETRIA

Resisto HE
Resisto 1500 HE IP66 7100lm 840 EM
0010272

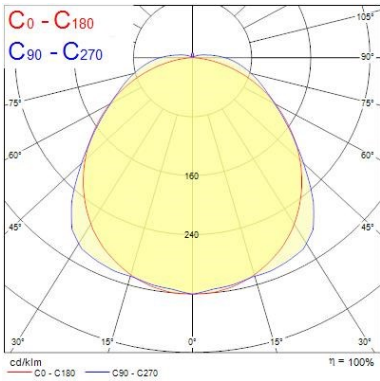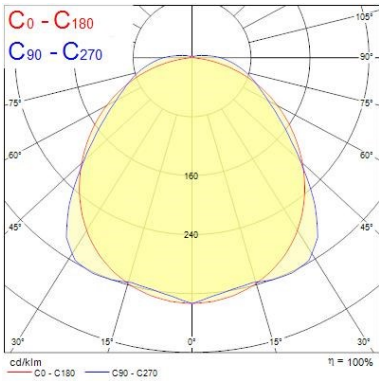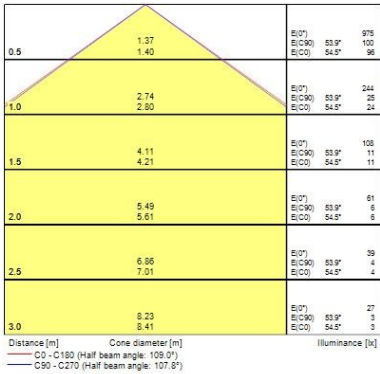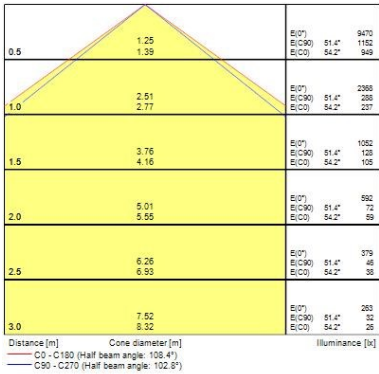

DISEGNI TECNICI

