

Syl-Lab IP65 1200x300 UGR19 (Recessed) SYL-LAB LED IP65 RECESSED 36W 4K PAR 1200 EB 0055334



Caratteristiche prodotto

- IP65 Panel, dual IP65 (above and below), recessed for t-grid ceiling, CRI80, tamper proof, steel construction, glass diffuser with matt louvres, 36W, 3900lm, 108lm/W, IK09, 4000K, 3 Step MacAdam Ellipse, driver current 250mA, Class 1, UGR<191, 220-240V, Average lifespan 90.000Hrs, HxWxD 1195x295x80mm.



PANORAMICA DEL PRODOTTO

Nome prodotto	SYL-LAB LED IP65 RECESSED 36W 4K PAR 1200 EB
Tecnologia	LED
Housing	Acciaio
Montaggio	Ceiling recessed mounting
General application	Logistics & Industry, Uffici
ETIM Class	EC002892
Garanzia	5 years
Fixture luminous flux (lm)	3900
Flusso luminoso (lm)	3900
Luminaire efficacy (lm/W)	108
L.O.R. (%)	100
Temperatura di colore (K)	4000
Colour Code	840
Colore della luce	Neutral White
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Gruppo di rischio fotobiologico	RG0
Potenza totale (W)	36
Electrical protection	Classe I
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Colore corpo lampada	Bianco
IP rating	IP65
IK rating	IK09
Product EAN number	5410288553344

TABELLA DATI

Dati generali

Syl-Lab IP65 1200x300 UGR19 (Recessed) SYL-LAB LED IP65 RECESSED 36W 4K PAR 1200 EB 0055334

Nome prodotto	SYL-LAB LED IP65 RECESSED 36W 4K PAR 1200 EB
Tecnologia	LED
Housing	Acciaio
Montaggio	Ceiling recessed mounting
General application	Logistics & Industry, Uffici
Operating temperature range (°C)	0°C...+30°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Garanzia	5 years

Dati ottici

Fixture luminous flux (lm)	3900
Flusso luminoso (lm)	3900
Luminaire efficacy (lm/W)	108
Temperatura ambiente per flusso luminoso massimo (°C)	25
L.O.R. (%)	100
Temperatura di colore (K)	4000
Colour Code	840
Colore della luce	Neutral White
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Gruppo di rischio fotobiologico	RG0

Dati elettrici

Potenza totale (W)	36
Tensione di rete (V)	230-240V
Lamp power factor	1
Electrical protection	Classe I
Control gear required	No
Transformer required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	250
Corrente di spunto (A)	53
Durata picco di corrente (µs)	230
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Quantità max. apparecchi per interruttore 10A tipo C	35
Quantità max. apparecchi per interruttore 16A tipo C	56

Dati vita utile

Vita utile nominale - L80 B20	90000
-------------------------------	-------

Syl-Lab IP65 1200x300 UGR19 (Recessed) SYL-LAB LED IP65 RECESSED 36W 4K PAR 1200 EB 0055334


Dati dimensionali

Colore corpo lampada	Bianco
IP rating	IP65
IK rating	IK09
Diffuser finish	Transparent
Diffuser material	Vetro
Lunghezza nominale del prodotto (mm)	1195
Larghezza nominale prodotto (mm)	295
Nominal Product Height (mm)	80
Cutout Dimensions (W x L in mm or Diameter in mm)	1200x300
Peso (Kg)	8.5

Dati di imballo

Tipologia imballo singolo	Carton
Product EAN number	5410288553344
Lunghezza imballo singolo (mm)	120.5
Larghezza imballo singolo (cm)	30.5
Packaging single depth (cm)	8.5
DUN14 (outer)	05410288553344
Quantità per imballo esterno	1
Packaging outer length / height (cm)	120.5
Packaging outer width (cm)	30.5
Packaging outer depth (cm)	8.5

FOTOMETRIA

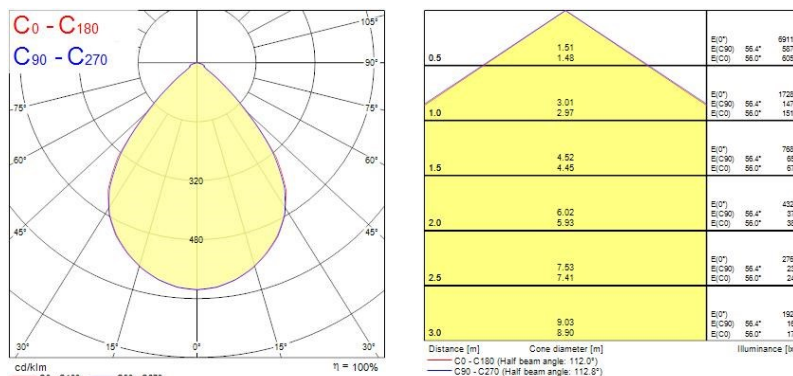

DISEGNI TECNICI

