


## Syl-Lab IP65 600x600 UGR19 (Surface Mounted)

SYL-LAB LED IP65 SUR 36W 4K PAR 600 EB  
0055372



### Caratteristiche prodotto

- IP65 Panel, dual IP65 (above and below), surface mounted, CRI80, tamper proof, steel construction, glass diffuser with matt louvres, 36W, 3900lm, 108lm/W, IK09, 4000K, 3 Step MacAdam Ellipse, driver current 250mA, Class 1, UGR<19, 220-240V, Avergae lifespan 90.000Hrs, HxWxD 595x595x80mm.



## PANORAMICA DEL PRODOTTO

Nome prodotto	SYL-LAB LED IP65 SUR 36W 4K PAR 600 EB
Tecnologia	LED
Housing	Acciaio
Montaggio	Ceiling surface mounting
General application	Strutture alberghiere, Logistics & Industry, Uffici
ETIM Class	EC002892
Garanzia	5 years
Fixture luminous flux (lm)	3900
Flusso luminoso (lm)	3900
Luminaire efficacy (lm/W)	108
L.O.R. (%)	100
Temperatura di colore (K)	4000
Colour Code	840
Colore della luce	Neutral White
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Gruppo di rischio fotobiologico	RG0
Potenza totale (W)	36
Electrical protection	Classe I
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Colore corpo lampada	Bianco
IP rating	IP65
IK rating	IK09
Product EAN number	5410288553726

## TABELLA DATI

### Dati generali

Nome prodotto	SYL-LAB LED IP65 SUR 36W 4K PAR 600 EB
Tecnologia	LED
Housing	Acciaio

## Syl-Lab IP65 600x600 UGR19 (Surface Mounted) SYL-LAB LED IP65 SUR 36W 4K PAR 600 EB 0055372

Montaggio	Ceiling surface mounting
General application	Strutture alberghiere, Logistics & Industry, Uffici
Operating temperature range (°C)	0°C...+30°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Garanzia	5 years

### Dati ottici

Fixture luminous flux (lm)	3900
Flusso luminoso (lm)	3900
Luminaire efficacy (lm/W)	108
Temperatura ambiente per flusso luminoso massimo (°C)	25
L.O.R. (%)	100
Temperatura di colore (K)	4000
Colour Code	840
Colore della luce	Neutral White
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Gruppo di rischio fotobiologico	RG0

### Dati elettrici

Potenza totale (W)	36
Tensione di rete (V)	230-240V
Lamp power factor	0.9
Electrical protection	Classe I
Control gear required	No
Transformer required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	250
Corrente di spunto (A)	53
Durata picco di corrente (µs)	230
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Quantità max. apparecchi per interruttore 10A tipo C	35
Quantità max. apparecchi per interruttore 16A tipo C	56

### Dati vita utile

Vita utile nominale - L80 B20	90000
-------------------------------	-------

### Dati dimensionali

Colore corpo lampada	Bianco
----------------------	--------


## Syl-Lab IP65 600x600 UGR19 (Surface Mounted) SYL-LAB LED IP65 SUR 36W 4K PAR 600 EB 0055372

IP rating	IP65
IK rating	IK09
Diffuser finish	Transparent
Diffuser material	Vetro
Lunghezza nominale del prodotto (mm)	655
Larghezza nominale prodotto (mm)	655
Nominal Product Height (mm)	80
Cutout Dimensions (W x L in mm or Diameter in mm)	N/A
Peso (Kg)	12.5

### Dati di imballo

Tipologia imballo singolo	Carton
Product EAN number	5410288553726
Lunghezza imballo singolo (mm)	65.0
Larghezza imballo singolo (cm)	65.0
Packaging single depth (cm)	9.0
DUN14 (outer)	05410288553726
Quantità per imballo esterno	1
Packaging outer length / height (cm)	65.0
Packaging outer width (cm)	65.0
Packaging outer depth (cm)	9.0

## FOTOMETRIA

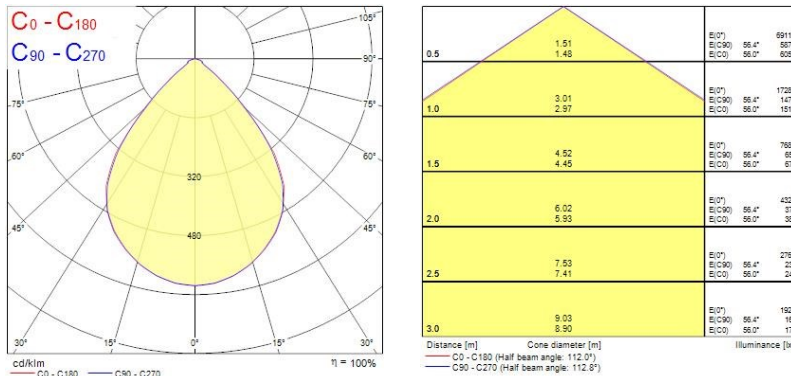

## DISEGNI TECNICI

