


Myriad Deco - Housing only

MYRIAD DECO HOUSING SPOT 4000K DALI SILVER REF 2057966



Caratteristiche prodotto

- The Myriad Housing 4000K Spot accent downlight is a high efficient 10W recessed spotlight, luminous flux: 1170lm, luminaire efficacy 117lm/W. Colour rendering index Ra>80, Colour temperature 4000K, Beam angle 28°, Protection rating IP20, Cut out dimensions: 76mm.

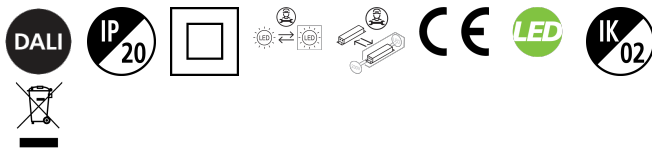

PANORAMICA DEL PRODOTTO

Nome prodotto	MYRIAD DECO HOUSING SPOT 4000K DALI SILVER REF
Tecnologia	LED
Housing	Alluminio
Montaggio	Ceiling recessed mounting
Environment	Interior
General application	Musei e gallerie, Uffici, Esercizi commerciali, Residential & Consumer
ETIM Class	EC001744
Garanzia	5 years
Fixture luminous flux (lm)	1170
Luminaire efficacy (lm/W)	117
L.O.R. (%)	100
Temperatura di colore (K)	4000
Colore della luce	Neutral White
CRI (Ra)	90
Consistenza colore (SDCM)	SDCM3
Beam Angle (°)	28
Gruppo di rischio fotobiologico	RG1
Luminous flux (emergency) (lm)	344
Potenza totale (W)	10
Electrical protection	Classe II
Tipologia reattore	Electronic ballast
Dimming method	DALI
Minimum dimming level (%)	1
Colore corpo lampada	Argento
IP rating	IP20
IK rating	IK02
Product EAN number	5025768579662

TABELLA DATI

Dati generali

Myriad Deco - Housing only

MYRIAD DECO HOUSING SPOT 4000K DALI SILVER REF
2057966

Nome prodotto	MYRIAD DECO HOUSING SPOT 4000K DALI SILVER REF
Tecnologia	LED
Housing	Alluminio
Montaggio	Ceiling recessed mounting
Environment	Interior
General application	Musei e gallerie, Uffici, Esercizi commerciali, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Garanzia	5 years

Dati ottici

Fixture luminous flux (lm)	1170
Luminaire efficacy (lm/W)	117
L.O.R. (%)	100
Temperatura di colore (K)	4000
Colore della luce	Neutral White
CRI (Ra)	90
Consistenza colore (SDCM)	SDCM3
Cromaticità regolabile	No
Beam Angle (°)	28
Gruppo di rischio fotobiologico	RG1
Luminous flux (emergency) (lm)	344

Dati elettrici

Potenza totale (W)	10
Tensione di rete (V)	230-240V
Electrical protection	Classe II
Tipologia reattore	Electronic ballast
Transformer required	Si
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Dati vita utile

Vita utile nominale - L70 B50	100000
Vita utile nominale - L80 B20	100000
Vita utile nominale - L90 B10	68500

Dati dimensionali

Colore corpo lampada	Argento
IP rating	IP20
IK rating	IK02
Nominal Product Height (mm)	72
Cutout Dimensions (W x L in mm or Diameter in mm)	76

Myriad Deco - Housing only


MYRIAD DECO HOUSING SPOT 4000K DALI SILVER REF
2057966

Peso (Kg)	0.39
Recessed Depth (mm)	72

Dati di imballo

Tipologia imballo singolo	Carton
Product EAN number	5025768579662
Lunghezza imballo singolo (mm)	17.5
Larghezza imballo singolo (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768579662
Quantità per imballo esterno	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5


FOTOMETRIA

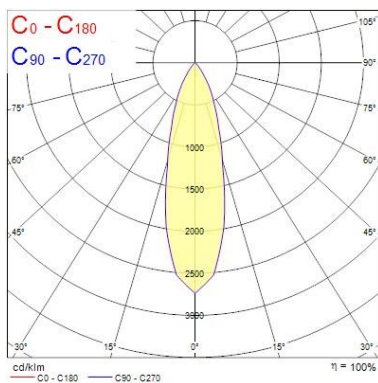

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(0°) E(C90)
0.5	0.25	1200	5970
1.0	0.51	300	1488
1.5	0.76	133	683
2.0	1.01	80	387
2.5	1.27	51	258
3.0	1.52	36	183

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 28.4°)

DISEGNI TECNICI



Dimensions (mm)