

## Myriad Deco - Housing only

### MYRIAD DECO HOUSING SPOT 4000K PHDM BLACK REF

#### 2058013



#### Caratteristiche prodotto

- The Myriad Housing 4000K Spot accent downlight is a high efficient 10W recessed spotlight, luminous flux: 1170lm, luminaire efficacy 117lm/W. Colour rendering index Ra>80, Colour temperature 4000K, Beam angle 28°, Protection rating IP20, Cut out dimensions: 76mm.



### PANORAMICA DEL PRODOTTO

Nome prodotto	MYRIAD DECO HOUSING SPOT 4000K PHDM BLACK REF
Tecnologia	LED
Housing	Alluminio
Montaggio	Ceiling recessed mounting
Environment	Interior
General application	Strutture alberghiere, Uffici, Esercizi commerciali, Residential & Consumer
ETIM Class	EC001744
Garanzia	5 years
Fixture luminous flux (lm)	1170
Luminaire efficacy (lm/W)	117
L.O.R. (%)	100
Temperatura di colore (K)	4000
Colore della luce	Neutral White
CRI (Ra)	90
Consistenza colore (SDCM)	SDCM3
Beam Angle (°)	28
Potenza totale (W)	10
Electrical protection	Classe II
Tipologia reattore	Electronic ballast
Dimming method	Other
Minimum dimming level (%)	10
Colore corpo lampada	Nero
IP rating	IP20
IK rating	IK02
Product EAN number	5025768580132

### TABELLA DATI

#### Dati generali

Nome prodotto	MYRIAD DECO HOUSING SPOT 4000K PHDM BLACK REF
Tecnologia	LED
Housing	Alluminio
Montaggio	Ceiling recessed mounting

## Myriad Deco - Housing only

*MYRIAD DECO HOUSING SPOT 4000K PHDM BLACK REF*  
2058013

Environment	Interior
General application	Strutture alberghiere, Uffici, Esercizi commerciali, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Garanzia	5 years

### Dati ottici

Fixture luminous flux (lm)	1170
Luminaire efficacy (lm/W)	117
L.O.R. (%)	100
Temperatura di colore (K)	4000
Colore della luce	Neutral White
CRI (Ra)	90
Consistenza colore (SDCM)	SDCM3
Cromaticità regolabile	No
Beam Angle (°)	28

### Dati elettrici

Potenza totale (W)	10
Tensione di rete (V)	230-240V
Electrical protection	Classe II
Tipologia reattore	Electronic ballast
Transformer required	Si
Dimming method	Other
Minimum dimming level (%)	10
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

### Dati vita utile

Vita utile nominale - L70 B50	100000
Vita utile nominale - L80 B20	100000
Vita utile nominale - L90 B10	68500

### Dati dimensionali

Colore corpo lampada	Nero
IP rating	IP20
IK rating	IK02
Nominal Product Height (mm)	72
Cutout Dimensions (W x L in mm or Diameter in mm)	76
Peso (Kg)	0.39
Recessed Depth (mm)	72

### Dati di imballo



Tipologia imballo singolo	Carton
Product EAN number	5025768580132

## Myriad Deco - Housing only


MYRIAD DECO HOUSING SPOT 4000K PHDM BLACK REF  
2058013

Lunghezza imballo singolo (mm)	17.5
Larghezza imballo singolo (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768580132
Quantità per imballo esterno	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

### FOTOMETRIA

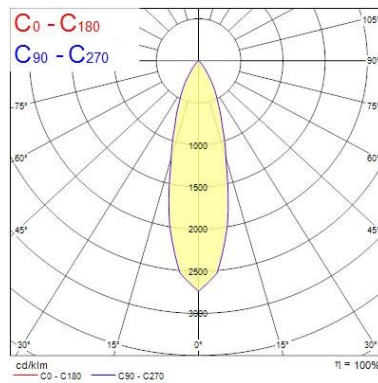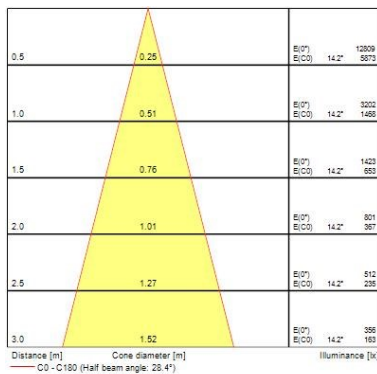

### DISEGNI TECNICI



Dimensioni (mm)