


Pixo Small 1650lm 940 NB MB WB White

Codice n. 0004546

SYLVANIA


PROTM

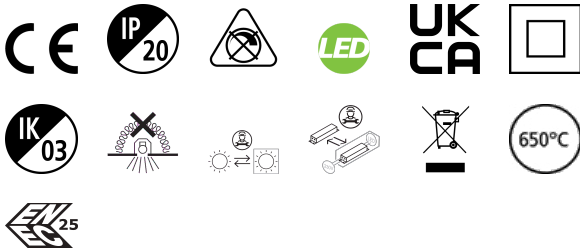

Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured white finishing colour Light color temperature: 4000K, natural white System power: 14W, Fixture lumen output: 1650lm, efficacy: 118lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.60mmx150mm, lenght of the Adaptor : 127mm. 5 years warranty. Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal. Not compatible with surface mount monopoint accessory

Dati tecnici

Dimensioni (mm)

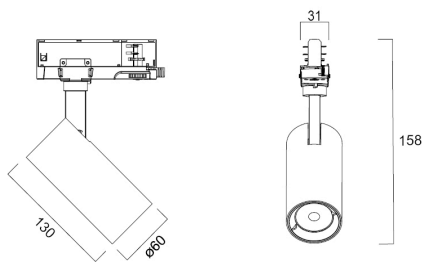

Fotometrie

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.32 0.21	5175 1200
1.0	0.45 0.46	2772 246
1.5	0.67 0.69	1240 100
2.0	0.89 0.92	576 84
2.5	1.12 1.15	360 60
3.0	1.34 1.39	225 40

Distance [m] Cone diameter [m] Illuminance [lx]
 — C2 - C180 (Half beam angle: 26.0°)
 — C50 - C270 (Half beam angle: 25.2°)

Pixo Small 1650lm 940 NB MB WB White

Codice n. 0004546

SYLVANIA

Max numero prodotti per interruttore 16A_B	48
Max numero prodotti per interruttore 20A_B	60

Dati vita utile

Vita utile nominale - L70 B50	100000
Vita utile nominale - L70 B20	100000
Vita utile nominale - L70 B10	100000
Vita utile nominale - L80 B50	100000
Vita utile nominale - L80 B20	100000
Vita utile nominale - L80 B10	100000
Vita utile nominale - L90 B50	100000
Vita utile nominale - L90 B20	100000
Vita utile nominale - L90 B10	100000

Dati dimensionali

Colore del prodotto	Bianco
Classificazione IP	IP20
Classificazione IK	IK03
Finitura del diffusore	Altro
Materiale del diffusore	Nessuno
Finitura del riflettore	Lucido
Lunghezza nominale del prodotto (mm)	150
Diametro prodotto (mm)	60
Peso (Kg)	0.385

Dati di imballo

Codice EAN prodotto	5410288045467
Lunghezza/altezza imballo singolo (cm)	19.0
Larghezza imballo singolo (cm)	9.5
Profondità imballo interno (cm) (singolo)	19.3
DUN14_2	15410288045464
Quantità per imballo esterno	16
Lunghezza/ Altezza imballo esterno (cm)	40.5
Packaging outer width (cm)	40.0
Profondità imballo esterno (cm)	41.0

Dati di sicurezza

Test del filo incandescente (°)	650
Temperatura ottimale di utilizzo (°C)	1-25