

Start Track Spot Large Food

START TRACK SPOT L WB WHT BAKERY

0046489



Caratteristiche prodotto

- Integrated LED spotlight for food application, Suitable for BAKERY lighting, Textured White - RAL9016, compact and minimalist design, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 52°, total system power: 35W, lifetime: >50000 hours at L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 900mA, electronic driver, non-dimmable, power factor: 0.93, electrical protection: Class II, Global Track 3 Phase adapter suitable for Global trac 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø113x164x240, weight: 1.368kg.



PANORAMICA DEL PRODOTTO

| | |
|----------------------------|----------------------------------|
| Nome prodotto | START TRACK SPOT L WB WHT BAKERY |
| Tecnologia | LED |
| Cap/Base | N/A |
| General application | Esercizi commerciali |
| Garanzia | 5 years |
| Fixture luminous flux (lm) | 1960 |
| Temperatura di colore (K) | 2259 |
| Colore della luce | N/A |
| Potenza totale (W) | 35 |
| Electrical protection | Classe II |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5410288464893 |

TABELLA DATI

Dati generali

| | |
|---------------------|----------------------------------|
| Nome prodotto | START TRACK SPOT L WB WHT BAKERY |
| Tecnologia | LED |
| Cap/Base | N/A |
| General application | Esercizi commerciali |
| Garanzia | 5 years |

Dati ottici

| | |
|----------------------------|------|
| Fixture luminous flux (lm) | 1960 |
| Temperatura di colore (K) | 2259 |
| Colore della luce | N/A |

Dati elettrici

| | |
|--|-----|
| Potenza totale (W) | 35 |
| Primary Supply/Product voltage - min (V) | 220 |

Start Track Spot Large Food

START TRACK SPOT L WB WHT BAKERY
0046489

| | |
|--|-----------|
| Primary Supply/Product voltage - max (V) | 240 |
| Electrical protection | Classe II |
| Drive current (mA) | 900 |
| Energy Efficiency Class (A->G) of contained light source | E |
| Nominal Frequency (Hz) | 50/60Hz |



Dati dimensionali

| | |
|-----------|-------|
| IP rating | IP20 |
| IK rating | IK02 |
| Peso (Kg) | 1.368 |

Dati di imballo

| | |
|--------------------------------------|----------------|
| Tipologia imballo singolo | Carton |
| Product EAN number | 5410288464893 |
| Lunghezza imballo singolo (mm) | 25.0 |
| Larghezza imballo singolo (cm) | 19.5 |
| Packaging single depth (cm) | 20.0 |
| DUN14 (outer) | 05410288464893 |
| Quantità per imballo esterno | 1 |
| Packaging outer length / height (cm) | 25.0 |
| Packaging outer width (cm) | 19.5 |
| Packaging outer depth (cm) | 20.0 |

FOTOMETRIA

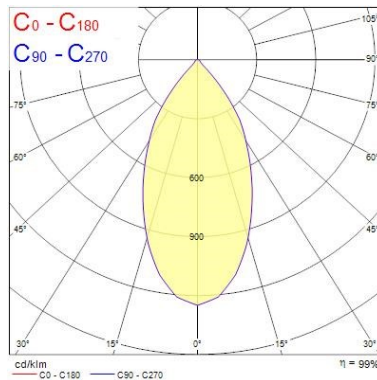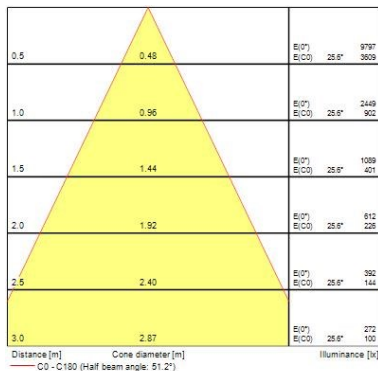

DISEGNI TECNICI

