


SylDeco Round
SylDeco Round IP54 GU10 Direct
0047132



Caratteristiche prodotto

- Round shaped exterior surface wall light with GU10 lamp holder (ideal for RefLED Retro LED lamp range), RAL9005 - Black Aluminium housing, light emission on one side, 220-240V, Class I, IP54, IK07, 76 x 102 x 123mm (W x H x D). Weight: 0.4 kg. Lamp is not included.

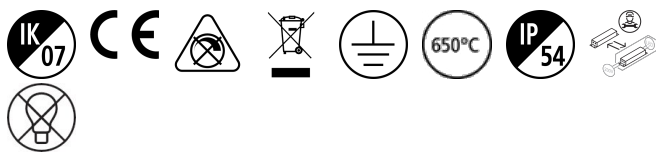

PANORAMICA DEL PRODOTTO

Nome prodotto	SylDeco Round IP54 GU10 Direct
Tecnologia	LED/Alogena
Cap/Base	GU10
Housing	Alluminio
Montaggio	Wall recessed, Wall surface mounted
General application	Residential & Consumer
ETIM Class	EC002892
E-number Finlandia	4579603
Garanzia	5 years
Fixture luminous flux (lm)	N/A
Luminaire efficacy (lm/W)	N/A
Colore della luce	N/A
Consistenza colore (SDCM)	N/A
Gruppo di rischio fotobiologico	Not applicable
Lampada inclusa	Fixture without Lightsource
Electrical protection	Classe I
Tipologia reattore	Not required
Dimmable	No
Dimming method	N/A
Colore corpo lampada	RAL 9005 - Jet black
IP rating	IP54
IK rating	IK07
Product EAN number	5410288471327

TABELLA DATI

Dati generali	
Nome prodotto	SylDeco Round IP54 GU10 Direct
Tecnologia	LED/Alogena
Cap/Base	GU10
Housing	Alluminio
Montaggio	Wall recessed, Wall surface mounted

SylDeco Round

SylDeco Round IP54 GU10 Direct

0047132

General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC002892
E-number Finlandia	4579603
Garanzia	5 years

Dati ottici

Fixture luminous flux (lm)	N/A
Luminaire efficacy (lm/W)	N/A
Colore della luce	N/A
Consistenza colore (SDCM)	N/A
Distribution type	Simmetrico
Gruppo di rischio fotobiologico	Not applicable

Dati elettrici

Lampada inclusa	Fixture without Lightsource
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	1
Electrical protection	Classe I
Tipologia reattore	Not required
Dimmable	No
Dimming method	N/A
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Quantità max. apparecchi per interruttore 16A tipo C	1
Max. products per 16A B Breaker	1
Connectable conductor cross section - Max (mm²)	4

Dati vita utile

Vita utile nominale - L70 B50	90000
Vita utile nominale - L70 B20	80000
Vita utile nominale - L70 B10	78000
Vita utile nominale - L80 B50	56000
Vita utile nominale - L80 B20	50000
Vita utile nominale - L80 B10	49000
Vita utile nominale - L90 B50	27000
Vita utile nominale - L90 B20	24000
Vita utile nominale - L90 B10	24000

Dati dimensionali

Colore corpo lampada	RAL 9005 - Jet black
IP rating	IP54
IK rating	IK07
Diffuser finish	Transparent
Diffuser material	Vetro

SylDeco Round

SylDeco Round IP54 GU10 Direct

0047132

Lunghezza nominale del prodotto (mm)	123
Larghezza nominale prodotto (mm)	76
Nominal Product Height (mm)	100
Peso (Kg)	0.406

Dati di imballo

Tipologia imballo singolo	Carton
Product EAN number	5410288471327
Lunghezza imballo singolo (mm)	11.0
Larghezza imballo singolo (cm)	13.0
Packaging single depth (cm)	8.0
DUN14 (outer)	15410288471324
Quantità per imballo esterno	16
Packaging outer length / height (cm)	34.0
Packaging outer width (cm)	27.5
Packaging outer depth (cm)	24.0

Dati di sicurezza

Temperatura ottimale di utilizzo (°C)	-20-40
---------------------------------------	--------

DISEGNI TECNICI

