


SYLPIPE HIGH OUTPUT
LED PIPE L 1200 HIGH OUTPUT WW
0051374



Caratteristiche prodotto

- LED T5 replacement batten, high output range: more lumens per meter with efficiency up to 125 lum/watt, seamless linking (up to 10M), ideal for direct lighting such as under cabinet or in kitchens, 120 degree beam angle, includes switch, includes 0.30m stripped cable, white polycarbonate body, includes standard and tilting brackets

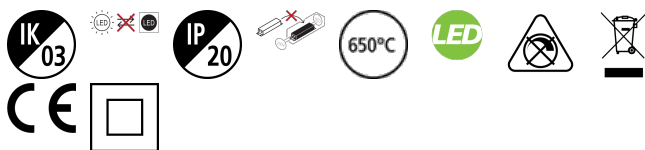

PANORAMICA DEL PRODOTTO

Nome prodotto	LED PIPE L1200 HIGH OUTPUT WW
Tecnologia	LED
Cap/Base	N/A
Housing	PC Polycarbonate
General application	Residential & Consumer, Esercizi commerciali
ETIM Class	EC000109
E-number Finlandia	4278219
Garanzia	3 years
Fixture luminous flux (lm)	1725
Luminaire efficacy (lm/W)	115
Temperatura di colore (K)	3000
Colore della luce	Bianco Caldo
CRI (Ra)	80
Beam Angle (°)	120
Gruppo di rischio fotobiologico	RG0
Potenza totale (W)	15
Electrical protection	Classe II
Tipologia reattore	LED driver constant current
Dimmable	No
Dimming method	N/A
Colore corpo lampada	Bianco
IP rating	IP20
IK rating	IK03
Product EAN number	5410288513744

TABELLA DATI

Dati generali	
Nome prodotto	LED PIPE L1200 HIGH OUTPUT WW
Tecnologia	LED
Cap/Base	N/A
Housing	PC Polycarbonate
General application	Residential & Consumer, Esercizi commerciali
Operating temperature range (°C)	-20°C...+40°C

SYLPIPE HIGH OUTPUT

LED PIPE L 1200 HIGH OUTPUT WW

0051374

Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
E-number Finlandia	4278219
Garanzia	3 years

Dati ottici

Fixture luminous flux (lm)	1725
Luminaire efficacy (lm/W)	115
Temperatura di colore (K)	3000
Colore della luce	Bianco Caldo
CRI (Ra)	80
Beam Angle (°)	120
Gruppo di rischio fotobiologico	RG0

Dati elettrici

Potenza totale (W)	15
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.7
Electrical protection	Classe II
Control gear required	No
Tipologia reattore	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	150
Corrente di spunto (A)	100
Durata picco di corrente (µs)	150
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Quantità max. apparecchi per interruttore 10A tipo C	87
Max. products per 13A C Breaker	113
Quantità max. apparecchi per interruttore 16A tipo C	142
Max. products per 20A C Breaker	174
Max. products per 10A B Breaker	51
Max. products per 13A B Breaker	68
Max. products per 16A B Breaker	84
Max. products per 20A B Breaker	105
Connectable conductor cross section - Max (mm²)	1.5

Dati vita utile

Vita utile nominale - L70 B50	30000
-------------------------------	-------

Dati dimensionali

SYLPIPE HIGH OUTPUT

LED PIPE L 1200 HIGH OUTPUT WW

0051374

Colore corpo lampada	Bianco
IP rating	IP20
IK rating	IK03
Diffuser material	PC Polycarbonate
Lunghezza nominale del prodotto (mm)	1200
Larghezza nominale prodotto (mm)	24
Nominal Product Height (mm)	35
Peso (Kg)	0.17


Dati di imballo

Tipologia imballo singolo	Carton
Product EAN number	5410288513744
Lunghezza imballo singolo (mm)	120.4
Larghezza imballo singolo (cm)	4.6
Packaging single depth (cm)	3.1
DUN14 (outer)	15410288513741
Quantità per imballo esterno	24
Packaging outer length / height (cm)	122.0
Packaging outer width (cm)	20.5
Packaging outer depth (cm)	21.5

Dati di sicurezza

Temperatura ottimale di utilizzo (°C)	-20-40
---------------------------------------	--------

FOTOMETRIA

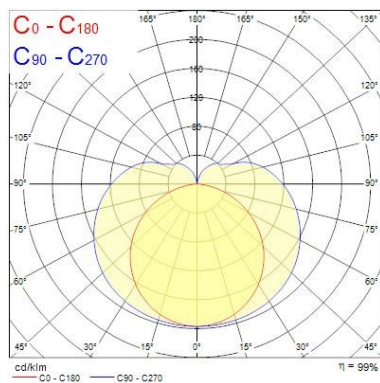

DISEGNI TECNICI

