


START Flex High Output
START Flex IP20 830 10750lm
0068114



Caratteristiche prodotto

- 5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 420 LEDs; 10750lm per 5m (2150lm per 1m); 24V; 3000K; CRI80; SDCM 3. Needs to be used with any aluminium profile for cooling LED chips purpose and therefore assuring longer lifetime (Profile HO Surface 16 0022604 can be used) ;Compatible with emergency packs: 0046600, 0046601



PANORAMICA DEL PRODOTTO

Nome prodotto	START Flex IP20 830 10750lm
Tecnologia	LED
Montaggio	Other
General application	Strutture alberghiere, Esercizi commerciali
ETIM Class	EC002706
E-number Finlandia	4276900
Garanzia	5 years
Fixture luminous flux (lm)	10750
Luminaire efficacy (lm/W)	130
Temperatura di colore (K)	3000
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Gruppo di rischio fotobiologico	RG1
Potenza totale (W)	82.5
Electrical protection	Classe III
Dimmable	Si
Dimming method	Other
IP rating	IP20
IK rating	IK00
Product EAN number	5410288681146

TABELLA DATI

Dati generali	
Nome prodotto	START Flex IP20 830 10750lm
Tecnologia	LED
Montaggio	Other
General application	Strutture alberghiere, Esercizi commerciali
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25

START Flex High Output

START Flex IP20 830 10750lm
0068114

ETIM Class	EC002706
E-number Finlandia	4276900
Garanzia	5 years

Dati ottici

Fixture luminous flux (lm)	10750
Luminaire efficacy (lm/W)	130
Temperatura di colore (K)	3000
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Gruppo di rischio fotobiologico	RG1

Dati elettrici

Potenza totale (W)	82.5
Electrical protection	Classe III
Control gear required	Sì
Dimmable	Sì
Dimming method	Other
Drive current (mA)	3438
Glow Wire Test (°C)	650
Lamp Energy Label (class)	E

Dati vita utile

Vita utile nominale - L70 B50	54000
Vita utile nominale - L70 B10	54000
Vita utile nominale - L80 B10	50000
Vita utile nominale - L90 B10	44000

Dati dimensionali

IP rating	IP20
IK rating	IK00
Lunghezza nominale del prodotto (mm)	5000
Larghezza nominale prodotto (mm)	10
Nominal Product Height (mm)	1.2
Peso (Kg)	0.1

Dati di imballo


Tipologia imballo singolo	Carton
Product EAN number	5410288681146
Lunghezza imballo singolo (mm)	23.5
Larghezza imballo singolo (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288681143
Quantità per imballo esterno	20
Packaging outer length / height (cm)	49.0
Packaging outer width (cm)	34.0
Packaging outer depth (cm)	24.0

START Flex High Output
START Flex IP20 830 10750lm
0068114


Dati di sicurezza

Temperatura ottimale di utilizzo (°C)	-20-40
---------------------------------------	--------

FOTOMETRIA

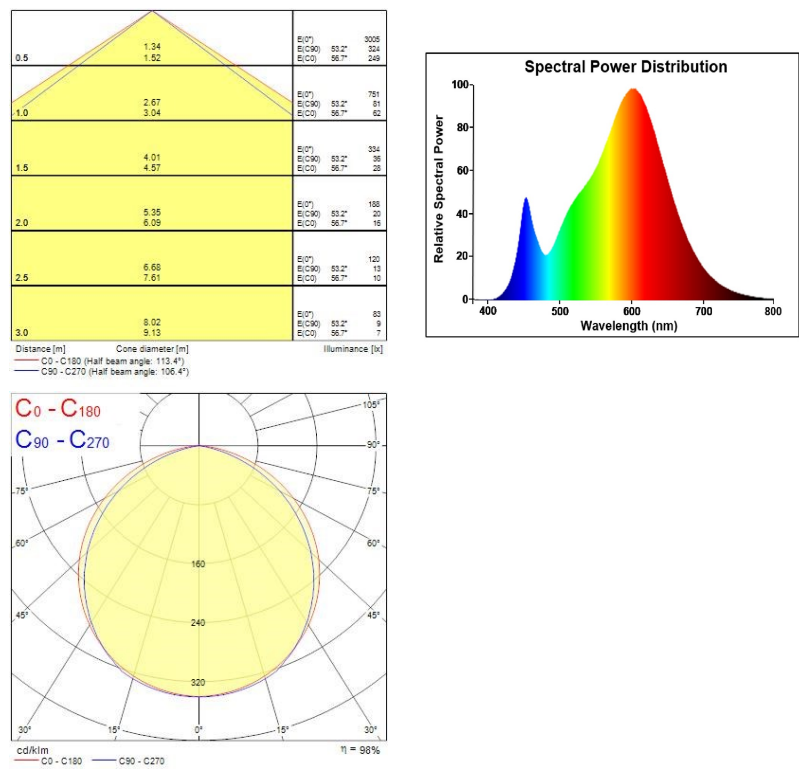

DISEGNI TECNICI



START Flex High Output
START Flex IP20 830 10750lm
0068114

**ENERG**

SYLVANIA

0068114




83
kWh/1000h



START Flex High Output
START Flex IP20 830 10750lm
0068114



0068114

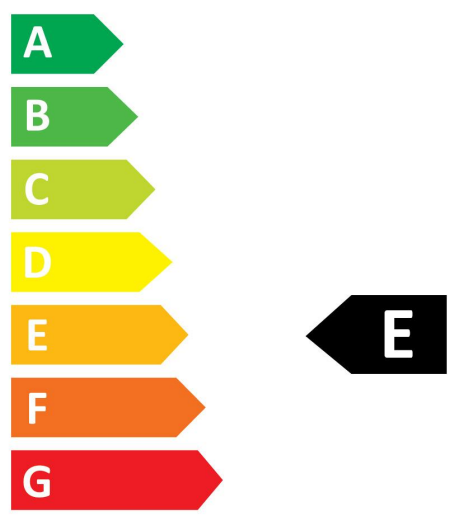

83
kWh/1000h

