



START Flex High Output
START Flex IP20 840 11750lm
0068115



Caratteristiche prodotto

- 5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 420 LEDs; 11750lm per 5m (2350lm per 1m); 24V; 4000K; CRI80; SDCM 3. Needs to be used with aluminium profile for cooling LED chips purpose and therefore assuring longer lifetime (Profile HO Surface 16 0022604 can be used);Compatible with emergency packs: 0046600, 0046601

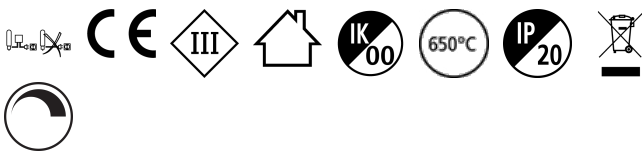

PANORAMICA DEL PRODOTTO

Nome prodotto	START Flex IP20 840 11750lm
Tecnologia	LED
Montaggio	Other
General application	Strutture alberghiere, Esercizi commerciali
ETIM Class	EC002706
E-number Finlandia	4276901
Garanzia	5 years
Fixture luminous flux (lm)	11750
Luminaire efficacy (lm/W)	142
Temperatura di colore (K)	4000
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Gruppo di rischio fotobiologico	RG1
Potenza totale (W)	82.5
Electrical protection	Classe III
Dimmable	Sì
Dimming method	Other
IP rating	IP20
IK rating	IK00
Product EAN number	5410288681153

TABELLA DATI

Dati generali	
Nome prodotto	START Flex IP20 840 11750lm
Tecnologia	LED
Montaggio	Other
General application	Strutture alberghiere, Esercizi commerciali
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25

START Flex High Output

START Flex IP20 840 11750lm
0068115

ETIM Class	EC002706
E-number Finlandia	4276901
Garanzia	5 years

Dati ottici

Fixture luminous flux (lm)	11750
Luminaire efficacy (lm/W)	142
Temperatura di colore (K)	4000
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Gruppo di rischio fotobiologico	RG1

Dati elettrici

Potenza totale (W)	82.5
Electrical protection	Classe III
Control gear required	Sì
Dimmable	Sì
Dimming method	Other
Drive current (mA)	3438
Glow Wire Test (°C)	650
Lamp Energy Label (class)	E

Dati vita utile

Vita utile nominale - L70 B50	54000
Vita utile nominale - L70 B10	54000
Vita utile nominale - L80 B10	50000
Vita utile nominale - L90 B10	44000

Dati dimensionali

IP rating	IP20
IK rating	IK00
Lunghezza nominale del prodotto (mm)	5000
Larghezza nominale prodotto (mm)	10
Nominal Product Height (mm)	1.2
Peso (Kg)	0.1

Dati di imballo


Tipologia imballo singolo	Carton
Product EAN number	5410288681153
Lunghezza imballo singolo (mm)	23.5
Larghezza imballo singolo (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288681150
Quantità per imballo esterno	20
Packaging outer length / height (cm)	49.0
Packaging outer width (cm)	34.0
Packaging outer depth (cm)	24.0

START Flex High Output
START Flex IP20 840 11750lm
0068115

Dati di sicurezza

Temperatura ottimale di utilizzo (°C)	-20-40
---------------------------------------	--------

FOTOMETRIA

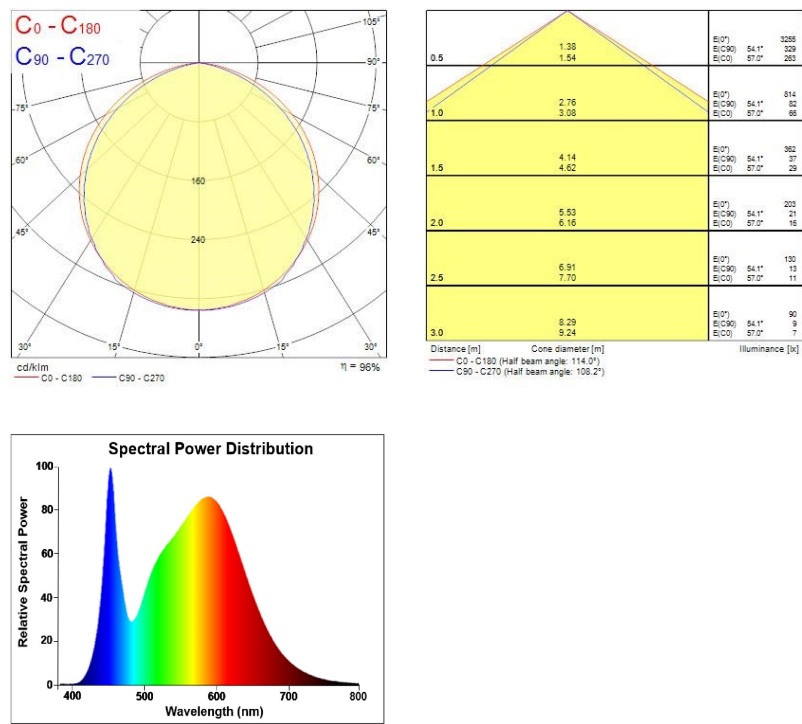

DISEGNI TECNICI




START Flex High Output
START Flex IP20 840 11750lm
0068115

**ENERG**

SYLVANIA

0068115

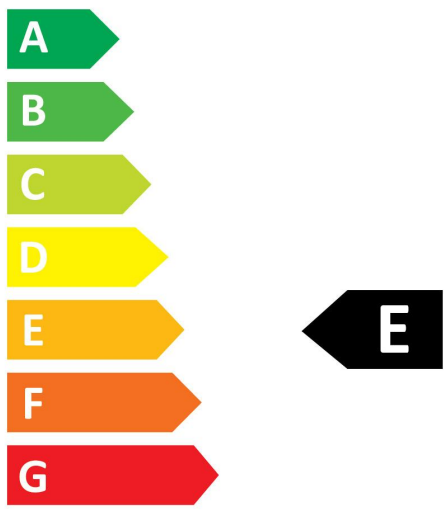


83
kWh/1000h



START Flex High Output
START Flex IP20 840 11750lm
0068115



0068115

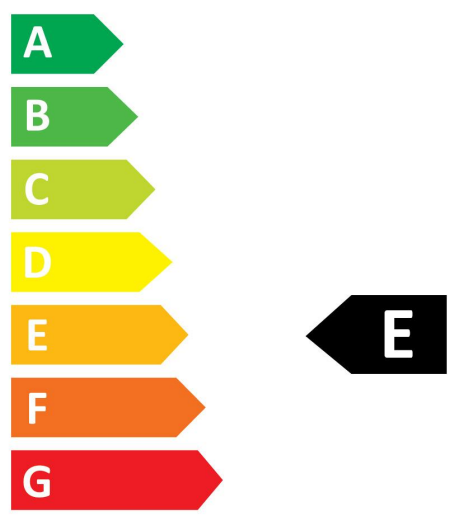

83
kWh/1000h

