

Myriad Pendant Silver - Surface Mounted


MYRIAD PENDANT 3000K SURFACE MTD DALI SILVER

2049556



Caratteristiche prodotto

- High-end architectural (3000K) warm white LED pendant with DALI driver and surface mounted housing, finished in a silver finish (RAL9006)

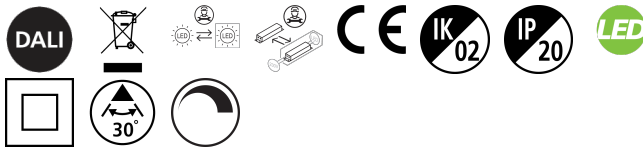

PANORAMICA DEL PRODOTTO

Nome prodotto	MYRIAD PENDANT 3000K SURFACE MTD DALI SILVER
Tecnologia	LED
Montaggio	Ceiling surface mounting
Environment	Indoor
General application	Strutture alberghiere, Uffici, Residential & Consumer, Esercizi commerciali
ETIM Class	EC001743
E-number Svezia	7561414
E-number Norway	3290206
Garanzia	5 years
Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
L.O.R. (%)	100
Temperatura di colore (K)	3000
Colore della luce	Bianco Caldo
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM3
Beam Angle (°)	30
Gruppo di rischio fotobiologico	RG1
Potenza totale (W)	10
Electrical protection	Classe II
Montaggio reattore	Integrale
Dimmable	Sì
Dimming method	DALI
Colore corpo lampada	Argento
IP rating	IP20
IK rating	IK02
Product EAN number	5025768495566

Myriad Pendant Silver - Surface Mounted

MYRIAD PENDANT 3000K SURFACE MTD DALI SILVER

2049556

TABELLA DATI

Dati generali

Nome prodotto	MYRIAD PENDANT 3000K SURFACE MTD DALI SILVER
Tecnologia	LED
Montaggio	Ceiling surface mounting
Environment	Indoor
General application	Strutture alberghiere, Uffici, Residential & Consumer, Esercizi commerciali
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
E-number Svezia	7561414
E-number Norway	3290206
Garanzia	5 years

Dati ottici

Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
L.O.R. (%)	100
Temperatura di colore (K)	3000
Colore della luce	Bianco Caldo
CRI (Ra)	80
Consistenza colore (SDCM)	SDCM3
Cromaticità regolabile	No
Beam Angle (°)	30
Distribution type	Simmetrico
Gruppo di rischio fotobiologico	RG1

Dati elettrici

Potenza totale (W)	10
Electrical protection	Classe II
Montaggio reattore	Integrale
Dimmable	Sì
Dimming method	DALI
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz

Dati vita utile

Vita utile nominale - L70 B50	100000
Vita utile nominale - L80 B20	100000
Vita utile nominale - L90 B10	68500

Dati dimensionali

Colore corpo lampada	Argento
IP rating	IP20
IK rating	IK02

Myriad Pendant Silver - Surface Mounted

MYRIAD PENDANT 3000K SURFACE MTD DALI SILVER


2049556

Nominal Product Height (mm)	129
Nominal Product Diameter (mm)	75
Max. Lamp Diameter (mm) - D	75
Peso (Kg)	0.95

Dati di imballo

Tipologia imballo singolo	Carton
Product EAN number	5025768495566
Lunghezza imballo singolo (mm)	17.5
Larghezza imballo singolo (cm)	15.0
Packaging single depth (cm)	17.5
Quantità per imballo esterno	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

FOTOMETRIA

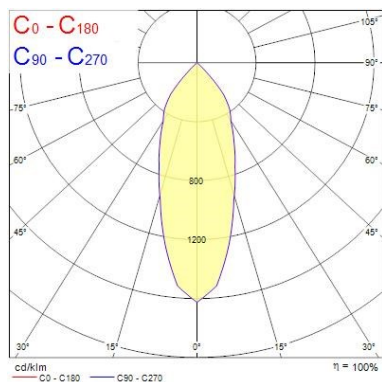

Distance [m]	Cone diameter [m]	E (0°) [lx]	E (C0) [lx]	E (C90) [lx]
0.5	0.33	7241	1810	3101
1.0	0.67	1810	453	775
1.5	1.00	453	113	194
2.0	1.34	113	28	48
2.5	1.67	28	7	12
3.0	2.01	7	2	3

DISEGNI TECNICI

