

Myriad Pendant Silver - Surface Mounted

MYRIAD PENDANT 3000K SURFACE MTD SWITCHED SILVER

2050682



Caratteristiche prodotto

- High-end architectural (3000K) warm white LED pendant with non dimmable driver and surface mounted housing, finished in a silver finish (RAL9006)



PANORAMICA DEL PRODOTTO

Nome prodotto	MYRIAD PENDANT 3000K SURFACE MTD SWITCHED SILVER
Tecnologia	LED
Montaggio	Ceiling surface mounting
Environment	Indoor
General application	Strutture alberghiere, Uffici, Esercizi commerciali, Residential & Consumer
ETIM Class	EC001743
E-number Finlandia	4275460
E-number Svezia	7561410
E-number Norway	3290200
Garanzia	5 years
Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
L.O.R. (%)	100
Temperatura di colore (K)	3000
Colore della luce	Bianco Caldo
CRI (Ra)	80
Beam Angle (°)	30
Potenza totale (W)	10
Electrical protection	Classe II
Montaggio reattore	Integrale
Dimmable	No
Dimming method	N/A
Colore corpo lampada	Argento
IP rating	IP20
IK rating	IK02
Product EAN number	5025768506828

TABELLA DATI

Myriad Pendant Silver - Surface Mounted

MYRIAD PENDANT 3000K SURFACE MTD SWITCHED SILVER

2050682

Dati generali

Nome prodotto	MYRIAD PENDANT 3000K SURFACE MTD SWITCHED SILVER
Tecnologia	LED
Montaggio	Ceiling surface mounting
Environment	Indoor
General application	Strutture alberghiere, Uffici, Esercizi commerciali, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
E-number Finlandia	4275460
E-number Svezia	7561410
E-number Norway	3290200
Garanzia	5 years

Dati ottici

Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
L.O.R. (%)	100
Temperatura di colore (K)	3000
Colore della luce	Bianco Caldo
CRI (Ra)	80
Cromaticità regolabile	No
Beam Angle (°)	30
Distribution type	Simmetrico

Dati elettrici

Potenza totale (W)	10
Electrical protection	Classe II
Montaggio reattore	Integrale
Dimmable	No
Dimming method	N/A
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz

Dati vita utile

Vita utile nominale - L70 B50	50000
-------------------------------	-------

Dati dimensionali

Colore corpo lampada	Argento
IP rating	IP20
IK rating	IK02
Nominal Product Height (mm)	129
Nominal Product Diameter (mm)	75
Max. Lamp Diameter (mm) - D	75
Peso (Kg)	0.95

Myriad Pendant Silver - Surface Mounted



MYRIAD PENDANT 3000K SURFACE MTD SWITCHED SILVER

2050682

Dati di imballo

Tipologia imballo singolo	Carton
Product EAN number	5025768506828
Lunghezza imballo singolo (mm)	17.5
Larghezza imballo singolo (cm)	15.0
Packaging single depth (cm)	17.5
Quantità per imballo esterno	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

FOTOMETRIA

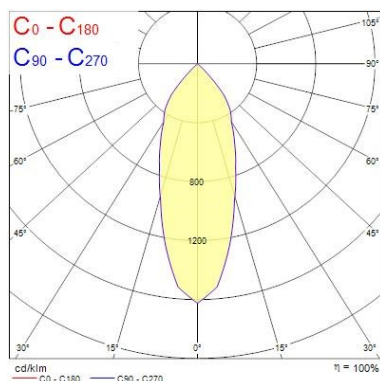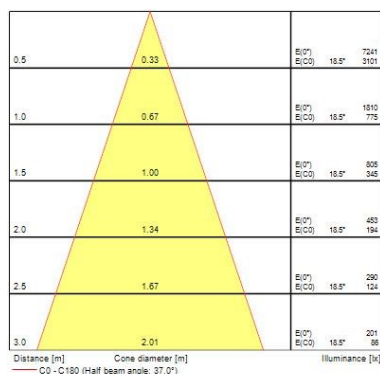

DISEGNI TECNICI

