


Myriad Pendant Silver - Remote Gear

MYRIAD PENDANT 3000K REMOTE GEAR SWITCHED SILVER
2050691



Caratteristiche prodotto

- High-end architectural (3000K) warm white LED pendant with non dimmable driver and remote gear housing, finished in a silver finish (RAL9006)

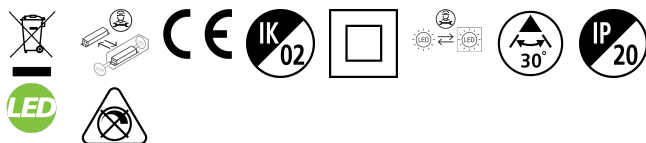

PANORAMICA DEL PRODOTTO

Nome prodotto	MYRIAD PENDANT 3000K REMOTE GEAR SWITCHED SILVER
Tecnologia	LED
Montaggio	Ceiling surface mounting
Environment	Indoor
General application	Strutture alberghiere, Uffici, Esercizi commerciali, Residential & Consumer
ETIM Class	EC001743
Garanzia	5 years
Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
L.O.R. (%)	100
Temperatura di colore (K)	3000
Colore della luce	Bianco Caldo
CRI (Ra)	80
Beam Angle (°)	30
Potenza totale (W)	10

Myriad Pendant Silver - Remote Gear

MYRIAD PENDANT 3000K REMOTE GEAR SWITCHED SILVER

2050691

Electrical protection	Classe II
Montaggio reattore	Remote
Dimmable	No
Dimming method	N/A
Colore corpo lampada	Argento
IP rating	IP20
IK rating	IK02
Product EAN number	5025768506910

TABELLA DATI

Dati generali

Nome prodotto	MYRIAD PENDANT 3000K REMOTE GEAR SWITCHED SILVER
Tecnologia	LED
Montaggio	Ceiling surface mounting
Environment	Indoor
General application	Strutture alberghiere, Uffici, Esercizi commerciali, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
Garanzia	5 years

Dati ottici

Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
L.O.R. (%)	100
Temperatura di colore (K)	3000
Colore della luce	Bianco Caldo
CRI (Ra)	80
Cromaticità regolabile	No
Beam Angle (°)	30
Distribution type	Simmetrico

Dati elettrici

Potenza totale (W)	10
Electrical protection	Classe II
Montaggio reattore	Remote
Dimmable	No
Dimming method	N/A
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz

Dati vita utile

Vita utile nominale - L70 B50	50000
-------------------------------	-------

Myriad Pendant Silver - Remote Gear

MYRIAD PENDANT 3000K REMOTE GEAR SWITCHED SILVER
2050691


Dati dimensionali

Colore corpo lampada	Argento
IP rating	IP20
IK rating	IK02
Nominal Product Height (mm)	129
Nominal Product Diameter (mm)	75
Max. Lamp Diameter (mm) - D	75
Peso (Kg)	0.45



Dati di imballo

Tipologia imballo singolo	Carton
Product EAN number	5025768506910
Lunghezza imballo singolo (mm)	17.5
Larghezza imballo singolo (cm)	15.0
Packaging single depth (cm)	17.5
Quantità per imballo esterno	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

FOTOMETRIA




3000K

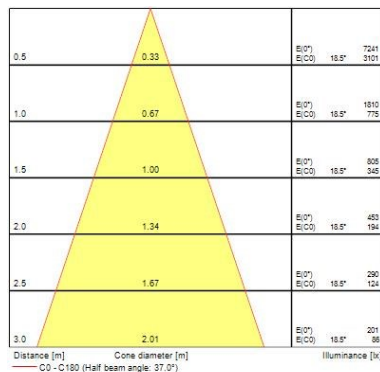

Myriad Pendant Silver - Remote Gear

MYRIAD PENDANT 3000K REMOTE GEAR SWITCHED SILVER
2050691

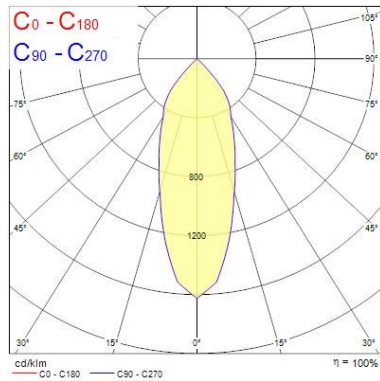

DISEGNI TECNICI

