

Myriad Pendant Silver - Remote Gear

MYRIAD PENDANT 4000K REMOTE GEAR SWITCHED SILVER
2050692



Caratteristiche prodotto

- High-end architectural (4000K) neutral white LED pendant with non dimmable driver and remote gear housing, finished in a silver finish (RAL9006)



PANORAMICA DEL PRODOTTO

Nome prodotto	MYRIAD PENDANT 4000K REMOTE GEAR SWITCHED SILVER
Tecnologia	LED
Montaggio	Ceiling surface mounting
Environment	Indoor
General application	Strutture alberghiere, Uffici, Esercizi commerciali, Residential & Consumer
ETIM Class	EC001743
Garanzia	5 years
Fixture luminous flux (lm)	1093
Luminaire efficacy (lm/W)	109.3
L.O.R. (%)	100
Temperatura di colore (K)	4000
Colore della luce	Neutral White
CRI (Ra)	80
Beam Angle (°)	30
Potenza totale (W)	10

Myriad Pendant Silver - Remote Gear

MYRIAD PENDANT 4000K REMOTE GEAR SWITCHED SILVER
2050692

Electrical protection	Classe II
Montaggio reattore	Remote
Dimmable	No
Dimming method	N/A
Colore corpo lampada	Argento
IP rating	IP20
IK rating	IK02
Product EAN number	5025768506927

TABELLA DATI

Dati generali

Nome prodotto	MYRIAD PENDANT 4000K REMOTE GEAR SWITCHED SILVER
Tecnologia	LED
Montaggio	Ceiling surface mounting
Environment	Indoor
General application	Strutture alberghiere, Uffici, Esercizi commerciali, Residential & Consumer
Performance ambient temperature T _a (°C)	25
ETIM Class	EC001743
Garanzia	5 years

Dati ottici

Fixture luminous flux (lm)	1093
Luminaire efficacy (lm/W)	109.3
L.O.R. (%)	100
Temperatura di colore (K)	4000
Colore della luce	Neutral White
CRI (Ra)	80
Cromaticità regolabile	No
Beam Angle (°)	30
Distribution type	Simmetrico

Dati elettrici

Potenza totale (W)	10
Electrical protection	Classe II
Montaggio reattore	Remote
Dimmable	No
Dimming method	N/A
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz

Dati vita utile

Vita utile nominale - L70 B50	50000
-------------------------------	-------

Myriad Pendant Silver - Remote Gear

MYRIAD PENDANT 4000K REMOTE GEAR SWITCHED SILVER
2050692



Dati dimensionali

Colore corpo lampada	Argento
IP rating	IP20
IK rating	IK02
Nominal Product Height (mm)	129
Nominal Product Diameter (mm)	75
Max. Lamp Diameter (mm) - D	75
Peso (Kg)	0.45

Dati di imballo

Tipologia imballo singolo	Carton
Product EAN number	5025768506927
Lunghezza imballo singolo (mm)	17.5
Larghezza imballo singolo (cm)	15.0
Packaging single depth (cm)	17.5
Quantità per imballo esterno	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

FOTOMETRIA

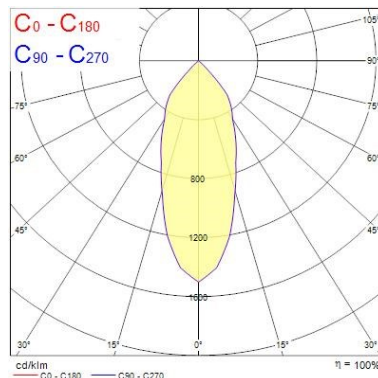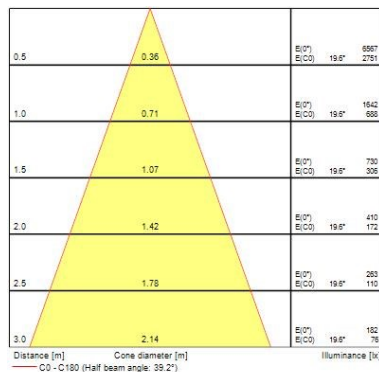

DISEGNI TECNICI

