

# PIXO LINE 1500 90D Beam 840 Black

Codice n. 0007822

**SYLVANIA**


**PRO**<sup>TM</sup>



Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps, translucent optic diffuser, light beam angle: 90° Textured black finishing colour. Light color temperature: 4000K, neutral white, max. system power: 50W Max. fixture lumen output: 7400lm, efficacy: 148lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx38.4mmx 37mm

## Dati tecnici

### Dimensioni (mm)

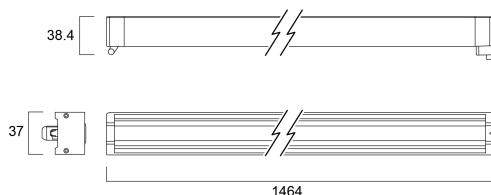

### Fotometrie

| Distance [m] | Cone diameter [m] | Beam angle [°] | Beam diameter [m] | Beam diameter [in] | Beam diameter [ft] | Beam diameter [mm] |
|--------------|-------------------|----------------|-------------------|--------------------|--------------------|--------------------|
| 0.5          | 1.01              | 1.99           | 1.01              | 40.1               | 1.33               | 133                |
| 1.0          | 2.02              | 3.98           | 2.02              | 80.2               | 2.66               | 266                |
| 1.5          | 3.03              | 5.97           | 3.03              | 120.3              | 3.99               | 399                |
| 2.0          | 4.04              | 7.96           | 4.04              | 160.4              | 5.32               | 532                |
| 2.5          | 5.05              | 9.95           | 5.05              | 200.5              | 6.65               | 665                |
| 3.0          | 6.06              | 11.94          | 6.06              | 240.6              | 7.98               | 798                |

Distance [m] Cone diameter [m] Beam angle [°] Beam diameter [m] Beam diameter [in] Beam diameter [ft] Beam diameter [mm]

— C0 - C180 (Half beam angle: 108.4°)

— C90 - C270 (Half beam angle: 90.0°)



# PIXO LINE 1500 90D Beam 840 Black

Codice n. 0007822

**SYLVANIA**

## Dati dimensionali

|                                      |      |
|--------------------------------------|------|
| Colore del prodotto                  | Nero |
| Classificazione IP                   | IP20 |
| Classificazione IK                   | IK03 |
| Lunghezza nominale del prodotto (mm) | 1464 |
| Larghezza nominale prodotto (mm)     | 37   |
| Altezza nominale prodotto (mm)       | 38.4 |
| Peso (Kg)                            | 0.9  |

## Dati di imballo

|                                           |                |
|-------------------------------------------|----------------|
| Codice EAN prodotto                       | 5410288078229  |
| Lunghezza/altezza imballo singolo (cm)    | 147.0          |
| Larghezza imballo singolo (cm)            | 4.3            |
| Profondità imballo interno (cm) (singolo) | 4.3            |
| DUN14_2                                   | 15410288078226 |
| Quantità per imballo esterno              | 10             |
| Lunghezza/ Altezza imballo esterno (cm)   | 149.0          |
| Packaging outer width (cm)                | 24.0           |
| Profondità imballo esterno (cm)           | 11.0           |

## Dati di sicurezza

|                                       |        |
|---------------------------------------|--------|
| Test del filo incandescente (°)       | 650    |
| Temperatura ottimale di utilizzo (°C) | -20-40 |