



PRO

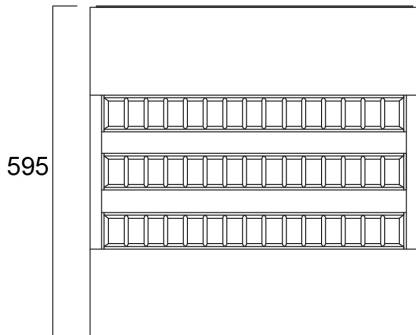

Distance (m)	Cone diameter (m)	Beam diameter (m)	Illuminance (lx)
0.5	0.97	0.94	812
			165
1.0	1.93	1.87	203
			44
1.5	2.90	2.81	92
			19
2.0	3.86	3.74	53
			11
2.5	4.83	4.68	34
			6
3.0	5.79	5.61	23
			5

Distance (m) Cone diameter (m) Beam diameter (m) Illuminance (lx)
 — C0 - C180 (Half beam angle: 86.2°)
 — C90 - C270 (Half beam angle: 85.0°)

