


DS-1NP6ADL0**U/UTP Cat6A LSZH 26AWG 50U Patch cord****Key Feature**

- Stable electrical performance, compliant with ANSI/TIA-568.2-D Category 6A and ISO 11801 Class E_A.
- Bare Copper conductor with less resistance, and better electrical properties and transmission performance.
- LSZH Sheath, environmentally friendly and safer to use.
- Gold plated plug, less resistance, less insertion loss.
- Excellent performance in the Fluke channel test.
- Compliant with RoHS 2.0.
- Suitable for 1000BASE-T, 10GBASE-T Ethernet.

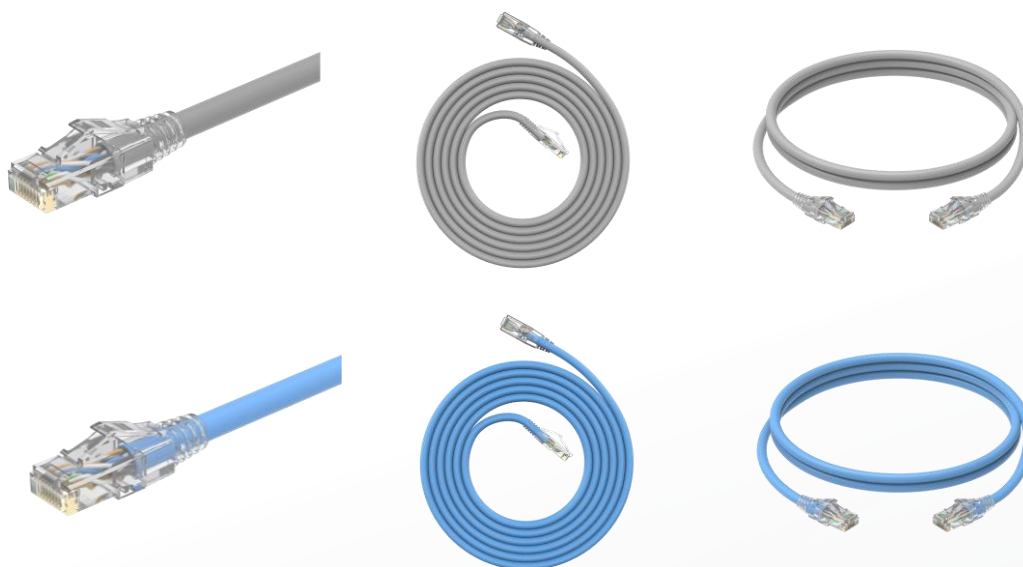

Specification

Model	DS-1NP6ADL0	
Category	Cat 6A	
Length	1m, 3m, 5m	
Reference standard	TIA-568.2-D, ISO/IEC 11801, RoHS 2.0	
Conductor	Material	Bare Copper (99.95%)
	Diameter	7 * 0.16 mm (26AWG)
Insulation	Material	HDPE
	Diameter	0.76 ± 0.05 mm
Sheath	Thickness	0.55 ± 0.05 mm
	Diameter	5.2 ± 0.40 mm
	Material	LSZH
	Color	Grey, Blue
Plug	Material	PC, UL94V-0
	Thickness of gold plating	50u inch
Mechanical Specifications	Plug Insertion Life	≥ 750 times

Available Model

DS-1NP6ADL0(O-STD) grey 1m

DS-1NP6ADL0(O-STD) blue 1m

DS-1NP6ADL0(O-STD) grey 3m

DS-1NP6ADL0(O-STD) blue 3m

DS-1NP6ADL0(O-STD) grey 5m

DS-1NP6ADL0(O-STD) blue 5m

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION[®]