
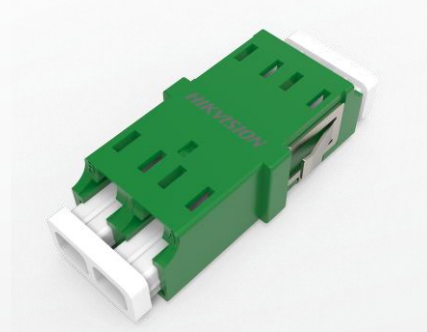
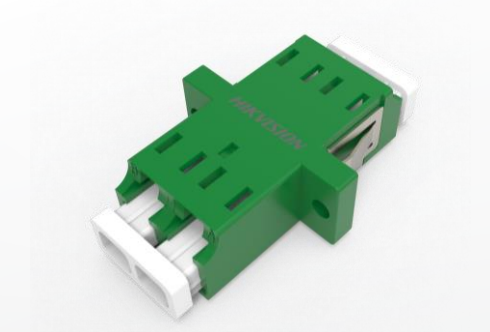


DS-1FALCDA | DS-1FALCDB**Fiber Optic Adapter, LC****Key Feature**



- Excellent compatibility.
- High quality ceramic sleeves with good concentricity, for high precision alignment and better insertion stability.
- Three-way fastening adaptive clip for accurate mounting.
- Complies with RoHS 2.0.
- Applicable to fiber optic cassettes, fiber optic patch panel, fiber optic distribution box, fiber optic terminal box, and others to realize the connectivity.

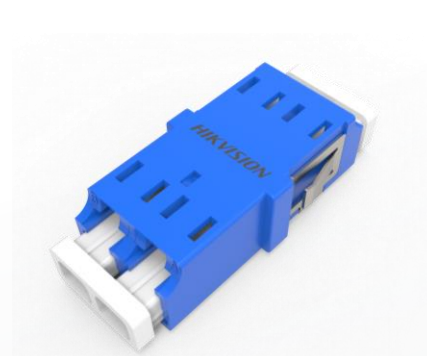

Specification

Product Type	Fiber optic adapter, LC		
General Specifications	Model	DS-1FALCDA	DS-1FALCDB
	Mounting	Square flange	No flange
	Body Style	Duplex	
	Interface	LC	
	Color	APC: Green UPC: Blue	
	Standard	IEC 61754-20-2002	
Optical Specifications	Insertion Loss, maximum	0.2 dB	
Material Specifications	Material Type	Polycarbonate (PC)	
	Alignment Sleeve Material	Ceramic	
Mechanical Specifications	Coupling Retention Force	70 N	
	Durability	> 500 times	
Environmental Specifications	Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)	
Packaging and Weight	Packaging Quantity	5	
	Packaging Type	Bag	
Regulatory Compliance/Certifications	RoHS 2.0	Compliant	

Dimension

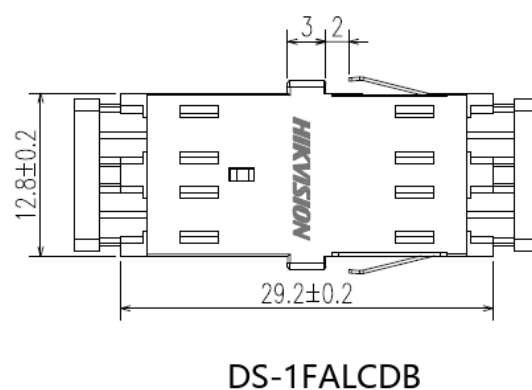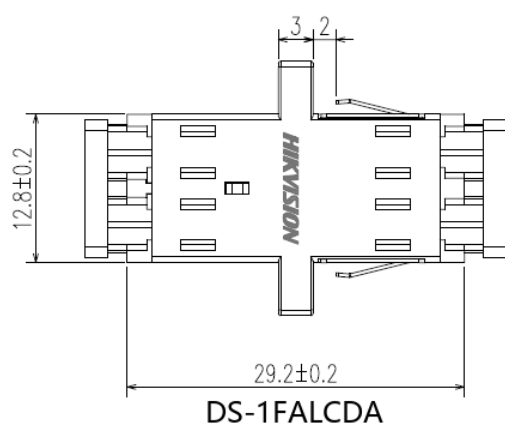

Available Model

DS-1FALCDA(O-STD)/5

DS-1FALCDB(O-STD)/5

See Far, Go Further



www.hikvision.com
support@hikvision.com

