


DS-1FASCSA | DS-1FASCSB | DS-1FASCDA | DS-1FASCDB Fiber Optic Adapter, SC

Key Feature



- Excellent compatibility.
- High quality ceramic sleeves with good concentricity, for high precision alignment and better insertion stability.
- Three-way fastening adaptive clip for accurate mounting.
- Complies with IEC RoHS 2.0.
- Applicable to fiber optic cassettes, fiber optic patch panel, fiber optic distribution box, fiber optic terminal box, and others to realize the connectivity.

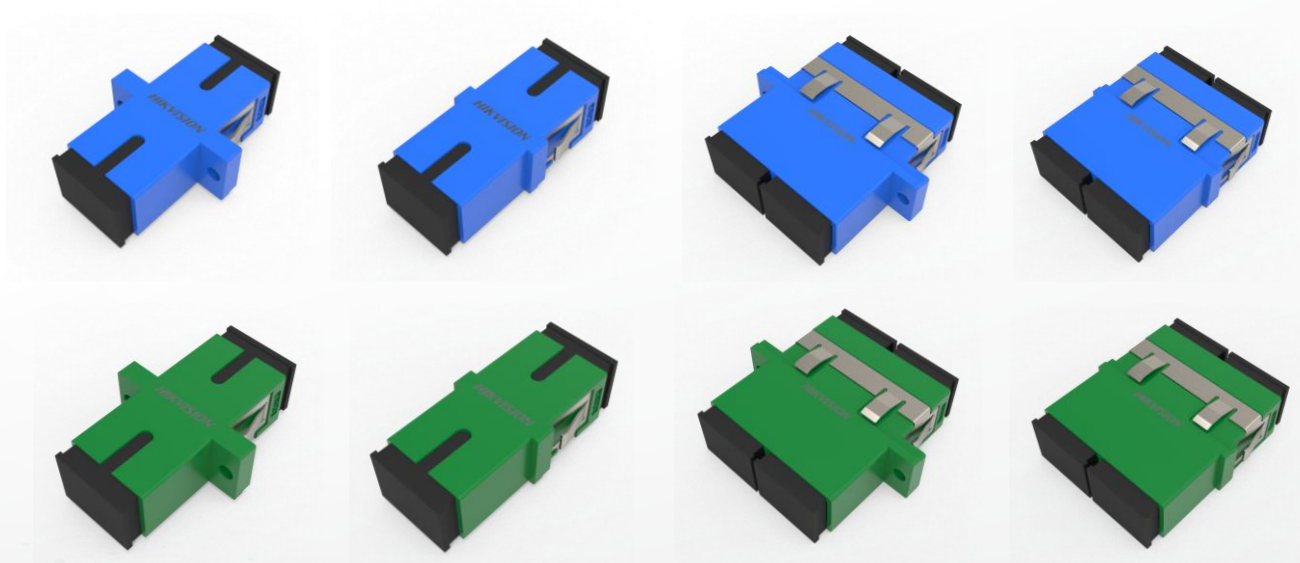


Specification


Product Type	Fiber optic adapter, SC				
General Specifications	Model	DS-1FASCSA	DS-1FASCSB	DS-1FASCSA	DS-1FASCSB
	Body Style	Simplex	Simplex	Duplex	Duplex
	Mounting	Square flange	No flange	Square flange	No flange
	Interface	SC			
	Color	APC: Green UPC: Blue			
	Standard	IEC 61754-4-2002			
Optical Specifications	Insertion Loss, maximum	0.2 dB			
Material Specifications	Material Type	Glass filled polybutylene terephthalate (PBT)			
	Alignment Sleeve Material	Ceramic			
Mechanical Specifications	Coupling Retention Force	70 N			
	Durability	> 500 times			
Environmental Specifications	Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)			
Packaging and Weight	Packaging Quantity	5			
	Packaging Type	Bag			
Regulatory Compliance/Certifications	RoHS 2.0	Compliant			

Dimension

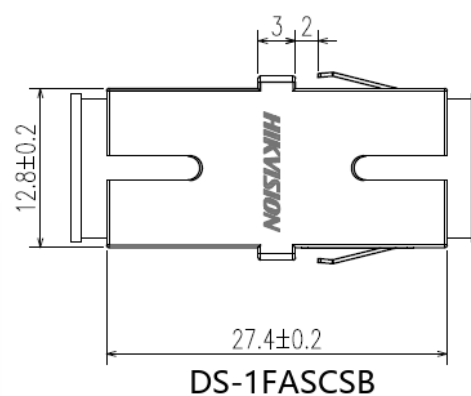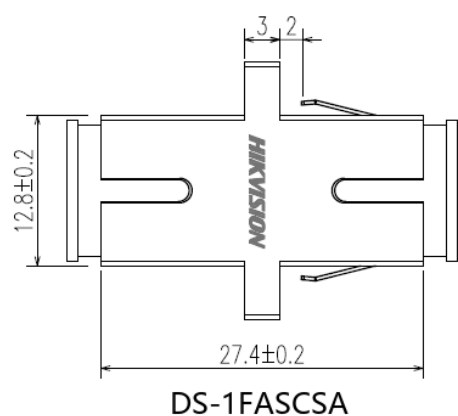

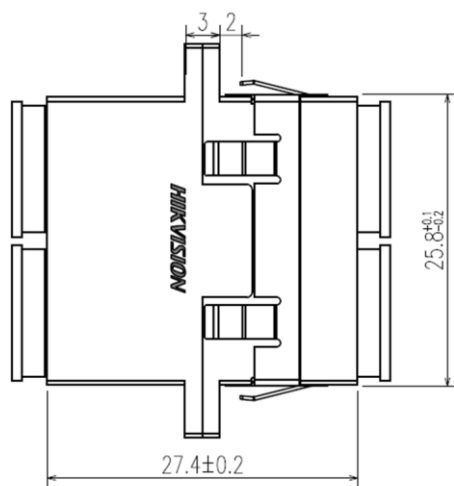

DS-1FASCSA

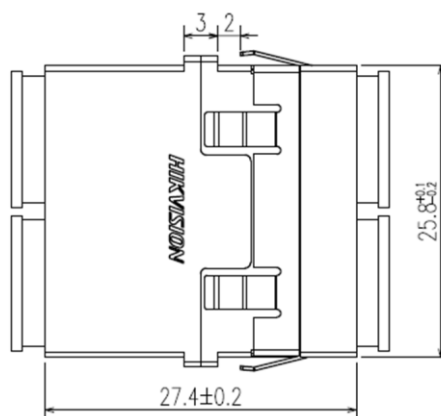

DS-1FASCDB

Available Model

DS-1FASCSA(O-STD)/5

DS-1FASCSB(O-STD)/5

DS-1FASCSA(O-STD)/5

DS-1FASCDB(O-STD)/5

See Far, Go Further



www.hikvision.com
support@hikvision.com

