


DS-1FCS72SCAL|DS-1FCS72SCUL|DS-1FCD72LCAL

DS-1FCS72LCAL|DS-1FCD72LCUL|DS-1FCS72LCUL

Fiber Optic Patch Cord, Singlemode

Key Feature

- Excellent performance and durability in harsh field environments.
- LSZH jacket, environmentally friendly and safer to use.
- G.657A2.
- Compliant with RoHS 2.0.

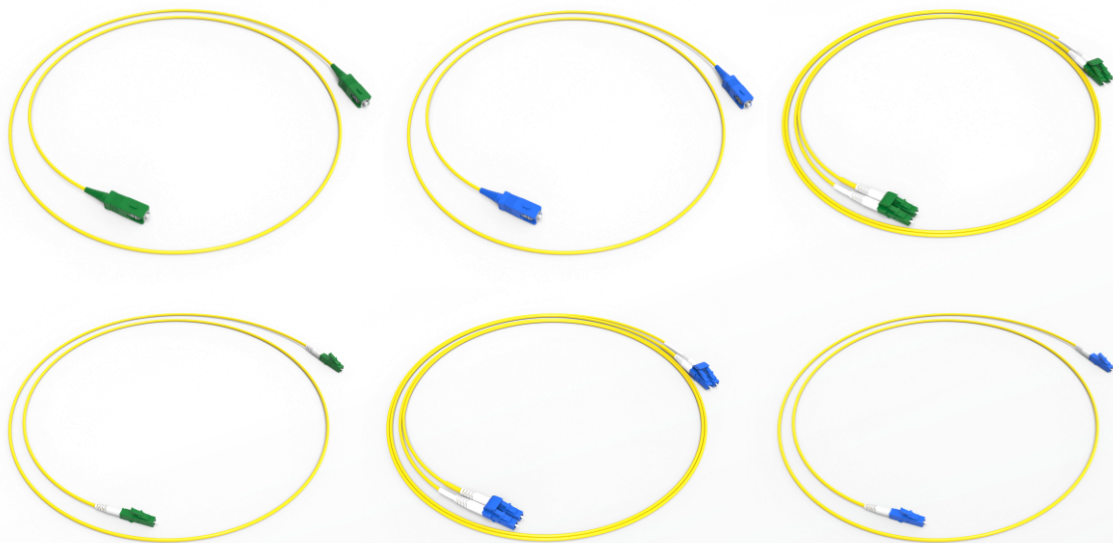

Specification

Product Type	Fiber optic patch cord, SC/APC						
General Specifications	Model	DS-1FCS72SCA	DS-1FCS72SCUL	DS-1FCD72LCAL	DS-1FCS72LCAL	DS-1FCD72LCUL	DS-1FCS72LCUL
	Interface	SC/APC	SC/UPC	LC/APC	LC/APC	LC/UPC	LC/UPC
	Body Style	Simplex	Simplex	Duplex	Simplex	Duplex	Simplex
	Connector Color	Green	Blue	Green	Green	Blue	Blue
	Jacket Color	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
	Jacket Material	LSZH	LSZH	LSZH	LSZH	LSZH	LSZH
	Standard	IEC 61754-4-2002	IEC 61754-4-2002	IEC 61754-20-2002	IEC 61754-20-2002	IEC 61754-20-2002	IEC 61754-20-2002
Optical Specifications	Fiber Mode	Singlemode	Singlemode	Singlemode	Singlemode	Singlemode	Singlemode
	Fiber Type	G657A2	G657A2	G657A2	G657A2	G657A2	G657A2
	Insertion Loss, maximum	0.2 dB	0.2 dB	0.2 dB	0.2 dB	0.2 dB	0.2 dB
	Return Loss, minimum	60 dB	50 dB	60 dB	60 dB	50 dB	50 dB
Dimensions	Length	3 m					
	Diameter Over Jacket	2.0 mm					
Mechanical Specifications	Bending Radius	20D(Dynamic), 10D(Static)					
	Durability	> 500 times					
Environmental Specifications	Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)					
Packaging and Weight	Packaging Quantity	1					
	Packaging Type	Bag					
Regulatory Compliance/Certifications	RoHS 2.0	Compliant					

Available Model

DS-1FCS72SCA (O-STD)

DS-1FCS72SCUL (O-STD)

DS-1FCD72LCAL (O-STD)

DS-1FCS72LCAL (O-STD)

DS-1FCD72LCUL (O-STD)

DS-1FCS72LCUL (O-STD)

See Far, Go Further



www.hikvision.com
support@hikvision.com

