

DS-3E0108-O 8-Port Fast Ethernet Switch




- 8x10/100M Adaptive RJ45 Ports
- Easy Plug-and-Play Installation
- Desk-and Wall-Mounting
- Rugged Metal Case, Exquisite and Beautiful Design


▪ Specification

Model		DS-3E0108-O
Network Parameters	Ports	8 × 100 Mbps RJ45 port
	Port Type	RJ45 port
	Working Mode	Standard mode (default)
	Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x
	Forwarding Mode	Store-and-forward switching
	MAC Address Table	2 K
	Switching Capacity	1.6 Gbps
	Packet Forwarding Rate	1.19 Mpps
	Internal Cache	0.768 Mbits
General	Dimensions (W × H × D)	142.4 mm × 25.6 mm × 53.1 mm (5.606" × 1.007" × 2.09")
	Shell	Metal material, fan-free design
	Gross Weight	0.35 kg (0.77 lb)
	Net Weight	0.2 kg (0.441 lb)
	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Operating Humidity	5% to 95% (no condensation)
	Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Storage Humidity	5% to 95% (no condensation)
	Power Supply	5 VDC, 1A
	Power Consumption in Idle	<5 W
	Max. Power Consumption	5 W
Approval	EMC	FCC (ANSI C63.4, 47 CFR PART 15B); CE-EMC/RCM (EN 55032: 2015+A11:2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4:2011+A1:2014, EN 55035:2017+A11:2020); IC (ICES-003: Issue 19)
	Safety	UL (UL 62368-1); CB (IEC 62368-1:2014); CE-LVD (EN 62368-1:2014+A11:2029)
	Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2018)

Typical Application

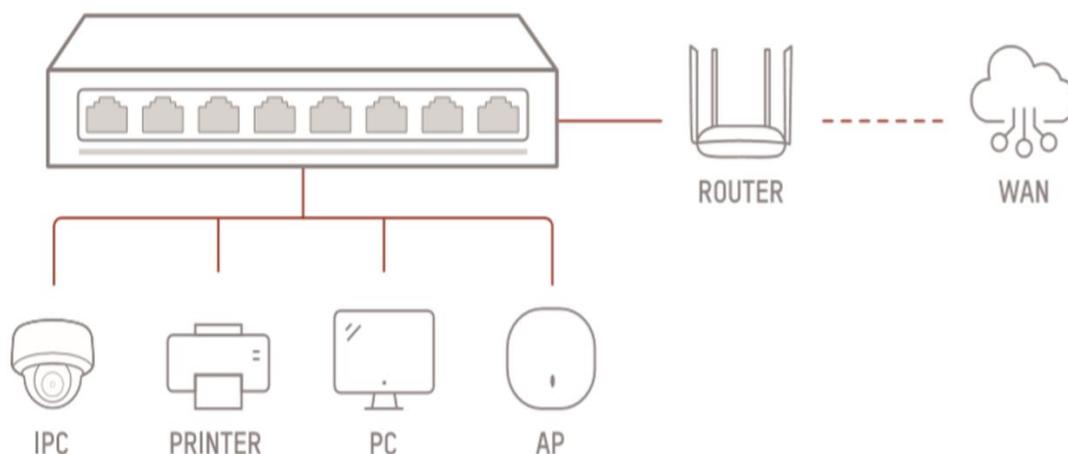


Physical Interface

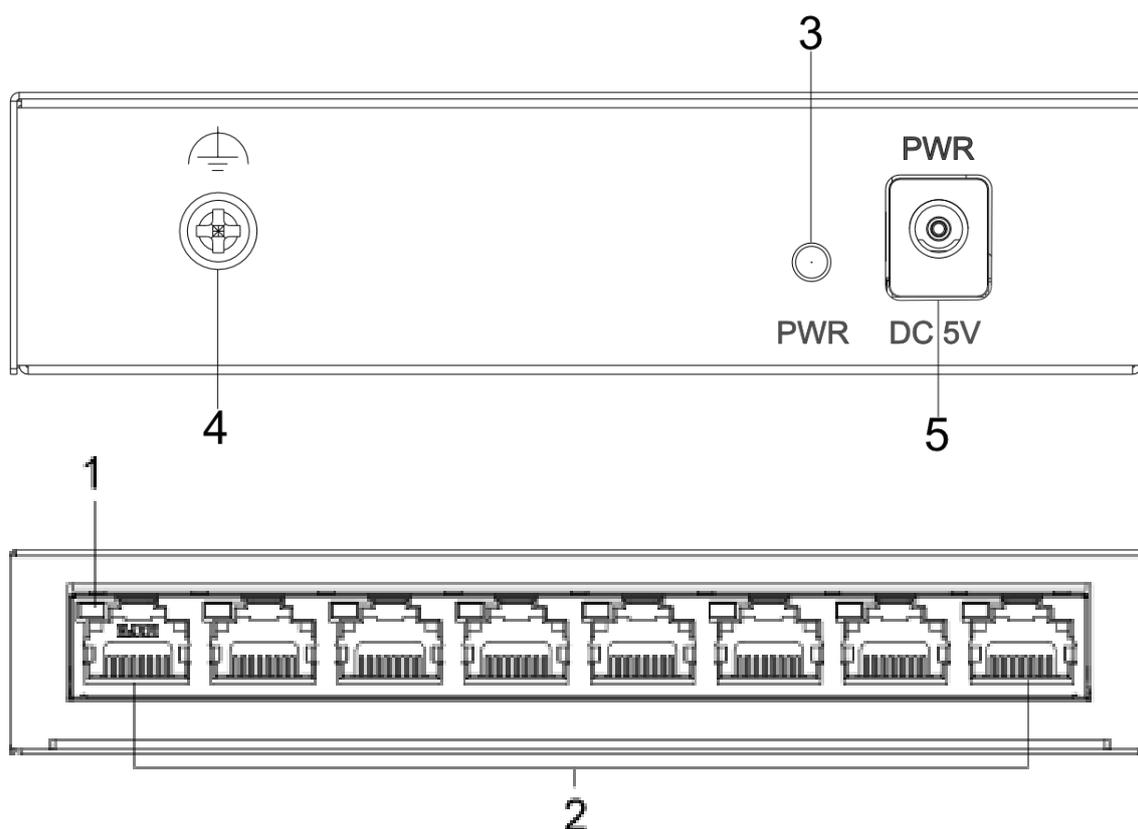

No.	Indicator/Port
1	LINK/ACT Indicator
2	10/100 Mbps RJ45 Port
3	PWR Indicator
4	Grounding Terminal
5	Power Supply

▪ Available Model

DS-3E0108-O

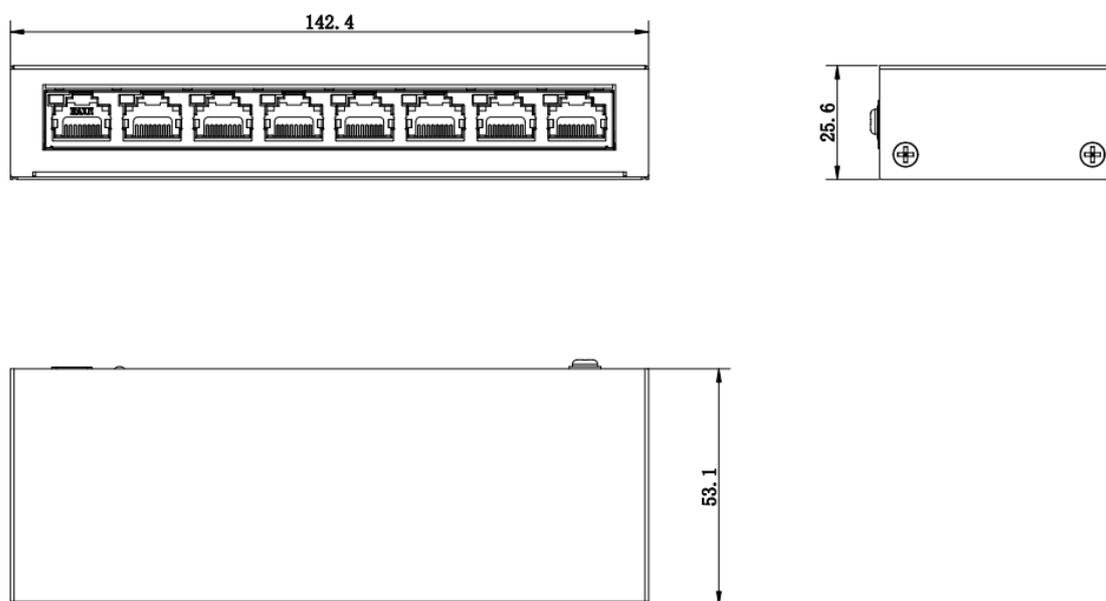▪ Dimension**Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global

Hikvision
Corporate Channel

hikvisionhq