

DS-DLAI0135-WM All-in-one LED Wall-mounted Bracket



- Avoids location deviation when install the bracket.
- For flush mounting, there should be enough operation space reserved around the display.
- Reserve 50 mm on the left, right, and top sides of the display, and reserve 100 mm at the bottom side of the display.
- The bracket should be installed on an even load-bearing wall or on a steel structure.
- The bracket is a specialized modal that fits corresponding all-in-one display only.


▪ **Specification**

| Model | | DS-DLAI0135-WM |
|----------|---------------|--|
| General | Gross Weight | 25 kg (55.12 lb) |
| Model | Model | DS-DLAI0135-WM |
| Brackets | Color | Black |
| | Material | SPCC high strength steel (for main body) |
| | Load-bearing | < 300 kg (661.39 lb) |
| | Suitable Size | 135 inches |

▪ **Available Model**

DS-DLAI0135-WM

▪ **Dimension**

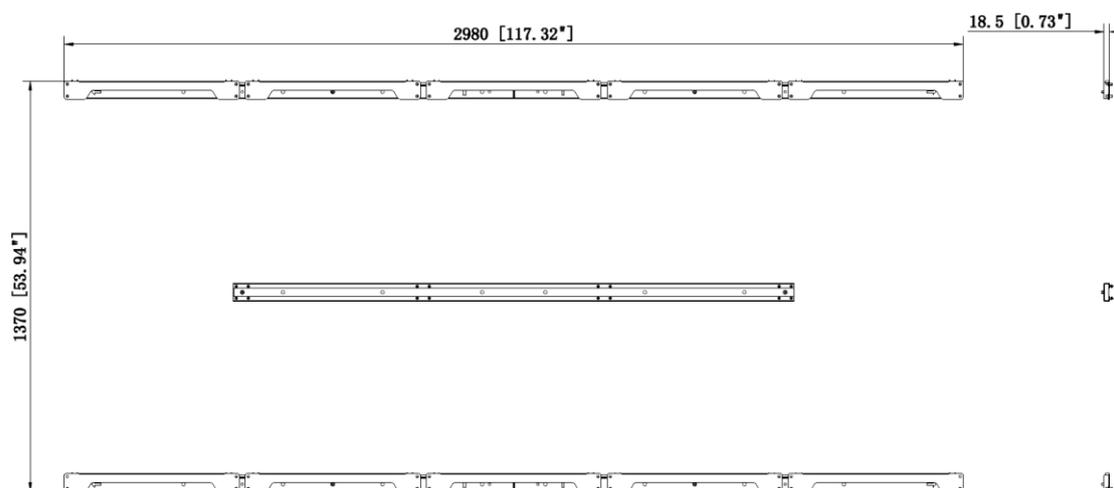

▪ **Accessory**

▪ **Optional**

DS-D4215FI-135H
135 Inch HOB
All-in-one LED



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

