


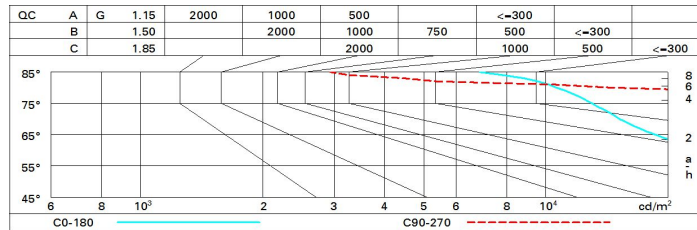

**Coefficienti di utilizzazione**

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	58	53	48	57	52	51	46	52
1.0	72	65	59	55	63	59	58	53	59
1.5	80	74	70	66	73	69	68	64	71
2.0	85	80	77	74	79	76	75	70	78
2.5	87	84	81	78	82	80	79	75	83
3.0	89	86	84	82	85	82	81	77	86
4.0	91	89	87	85	87	85	84	81	90
5.0	92	91	89	87	89	87	86	82	92

**Curva limite di luminanza**



**Diagramma UGR**

Corrected UGR values (at 4000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	26.5	27.4	26.8	27.6	27.9	31.8	32.7	32.1	33.0	33.2
	3H	26.4	27.2	26.8	27.5	27.8	31.9	32.7	32.2	32.9	33.2
	4H	26.4	27.1	26.7	27.4	27.7	31.8	32.5	32.1	32.8	33.2
	6H	26.3	27.0	26.7	27.3	27.7	31.7	32.4	32.1	32.7	33.1
	8H	26.3	27.0	26.7	27.3	27.6	31.7	32.3	32.1	32.7	33.0
	12H	26.3	26.9	26.7	27.2	27.6	31.7	32.3	32.0	32.6	33.0
4H	2H	27.2	27.9	27.5	28.2	28.5	33.1	33.8	33.4	34.1	34.4
	3H	27.2	27.8	27.6	28.1	28.5	33.3	33.9	33.7	34.2	34.6
	4H	27.1	27.7	27.5	28.1	28.4	33.3	33.8	33.7	34.2	34.6
	6H	27.1	27.6	27.5	28.0	28.4	33.2	33.7	33.6	34.1	34.5
	8H	27.1	27.5	27.5	27.9	28.4	33.2	33.6	33.6	34.0	34.5
	12H	27.0	27.4	27.5	27.8	28.3	33.1	33.5	33.6	34.0	34.4
8H	4H	27.3	27.8	27.8	28.2	28.6	33.4	33.8	33.8	34.2	34.7
	6H	27.3	27.7	27.8	28.1	28.6	33.4	33.7	33.8	34.2	34.7
	8H	27.3	27.6	27.8	28.0	28.5	33.3	33.6	33.8	34.1	34.6
	12H	27.2	27.5	27.7	28.0	28.5	33.3	33.6	33.8	34.1	34.6
12H	4H	27.3	27.7	27.8	28.2	28.6	33.3	33.7	33.8	34.2	34.6
	6H	27.3	27.6	27.8	28.1	28.6	33.3	33.6	33.8	34.1	34.6
	8H	27.3	27.6	27.8	28.0	28.6	33.3	33.6	33.8	34.1	34.6
Variations with the observer position at spacing:											
S =	1.0H	1.6 / -3.0					0.4 / -0.4				
	1.5H	2.6 / -5.2					0.6 / -1.2				
	2.0H	3.8 / -6.5					1.5 / -1.6				