

2130 SMART E XS

INDOOR

Cod: 213082G1D


spot orientabile ed estraibile / *adjustable and extractable spot*

Orientabile / *Directable*: 355°

Inclinabile / *Inclinable*: +/-90°



L'immagine è puramente a scopo illustrativo del prodotto
The picture is for illustrative purposes only

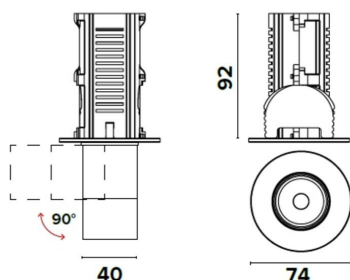

Caratteristiche di Costruzione / *Construction Specifications*


Corpo / <i>Body</i>	Corpo in pressofusione di alluminio <i>Die-cast aluminium body</i>
Ottica / <i>Optic</i>	Riflettore in policarbonato <i>Polycarbonate reflector</i>
Colore / <i>Color</i>	Bianco / <i>White</i>
Verniciatura / <i>Painting</i>	A polvere epossidica stabilizzata UV <i>Powder coated UV stabilized</i>

Caratteristiche Lampada / *Lamp specifications*

MacAdam	3
Temp. di colore / <i>Color temp.</i>	4000
IRC / <i>CRI</i>	>90
Flusso luminoso nominale / <i>Nominal luminous flux</i>	735lm
Fascio / <i>Beam Angle</i>	25°
DEC Flusso / <i>DEC Flux</i>	L70B20
Durata / <i>Duration</i>	50.000h

Caratteristiche di Cablaggio / *Wiring Specifications*

Driver / <i>Power Supply</i>	Driver dimmerabile push N/A
Corrente in uscita / <i>Output Current</i>	200mA
Potenza / <i>Power</i>	8,5W
Tensione in entrata alimentatore / <i>Driver input voltage</i>	220-240V
Frequenza in entrata alimentatore / <i>Driver input frequency</i>	50-60Hz



2130 SMART E XS

INDOOR

Cod: 213082G1D

spot orientabile ed estraibile / *adjustable and exactable spot*

Orientabile / Directable: 355°

Inclinabile / Inclinalable: +/-90°

2130 SMART E XS
213082G1D