



FUSIBILI 5x20T TIPO UL / CSA

Caratteristiche generali:

- Fusibili miniatura;
- Dimensioni: 5 x 20 mm;
- Caratteristica d'intervento: ritardato (T);
- Conformi alle norme: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2, UL 248-14, CSA C22.2;
- Corpo in vetro;
- Contatti in rame argentato;
- Corrente nominale: da 80mA a 8A;
- Tensione nominale: 250V;
- Temperatura di lavoro: -30°C / + 80°C;
- Confezione minima: 200 pezzi;
- Produttore: Hollyland;
- Codice produttore: 51S;

Foto del prodotto / Product image




UL / CSA TYPE 5x20T FUSES

General characteristics:

- Miniature fuses;
- Dimensions: 5 x 20 mm;
- Fusion characteristic: time-delay (T);
- Conform to standards: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2, UL 248-14, CSA C22.2;
- Glass body;
- Silver plated contacts;
- Rated current: from 80mA to 8A;
- Rated voltage: 250V;
- Operating temperature: -30°C / +80°C;
- Minimum packaging: 200 pieces;
- Manufacturer: Hollyland;
- Manufacturer code: 51S;

Disegno / Drawing

(dimensioni in mm) / (dimensions in mm)

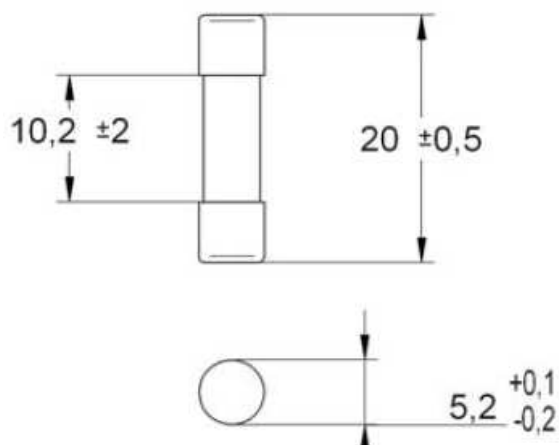

Pagine totali del documento: 3

Document total pages: 3

Ultimo aggiornamento: 2 Gennaio 2013

Last updated: 2 January 2013



Codici per l'ordinazione:

Ordering codes:

Codice fusibile <i>Fuse code</i>	In	Vn	Potere di interruzione a 125V AC (A) <i>Breaking capacity at 125V AC (A)</i>	Potere di interruzione a 250V AC (A) <i>Breaking capacity at 250V AC (A)</i>	Conf Pack
0450080	80mA	250V	10.000	35	200
0450100	100mA	250V	10.000	35	200
0450125	125mA	250V	10.000	35	200
0450160	160mA	250V	10.000	35	200
0450200	200mA	250V	10.000	35	200
0450250	250mA	250V	10.000	35	200
0450315	315mA	250V	10.000	35	200
0450400	400mA	250V	10.000	35	200
0450500	500mA	250V	10.000	35	200
0450630	630mA	250V	10.000	35	200
0450800	800mA	250V	10.000	35	200
0451001	1A	250V	10.000	35	200
0451251	1,25A	250V	10.000	100	200
0451601	1,6A	250V	10.000	100	200
0452002	2A	250V	10.000	100	200
0452502	2,5A	250V	10.000	100	200
0453153	3,15A	250V	10.000	100	200
0454004	4A	250V	10.000	200	200
0454005	5A	250V	10.000	200	200
0454306	6,3A	250V	10.000	200	200
0454307	8A	250V	10.000	200	200

- Tutti i codici sopra indicati sono omologati UL e CSA;
- Omologazione UL: E156471;
- Omologazione CSA: LR 101178-1;

All the above indicated codes have UL and CSA approvals;

UL approval: E156471;

CSA approval: LR 101178-1;



Curve caratteristiche tempo / corrente:

Time / current characteristic curves:

