



PORTAFUSIBILI CODICE 0900141

CODE 0900141 FUSEHOLDERS


Caratteristiche generali:

- Portafusibile da pannello per fusibili 5x20 mm;
- Conformi alle norme: CEI 32-6/6, IEC 60127-6;
- Corpo in materiale termoplastico UL94-V0;
- Glow wire test: 960°C;
- Con molla di pressione;
- Contatti in ottone stagnato;
- Tappo a baionetta;
- Collegamento: attacchi faston 4,8 mm;
- Corrente nominale: 10A;
- Tensione nominale: 250V;
- Temperatura operativa massima: 70°C;
- Confezione minima: 100 pezzi;
- Omologazione: UR;

General characteristics:

- Panel mounting fuseholder for 5x20 mm fuses;
- Conform to standards: CEI 32-6/6, IEC 60127-6;
- UL94-V0 thermoplastic body;
- Glow wire test at 960°C;
- With pressure spring;
- Tin plated brass contacts;
- Bayonet fixing cap;
- Connection type: faston 4,8 mm;
- Rated current: 10A;
- Rated voltage: 250V;
- Max operating temperature: 70°C;
- Minimum packaging: 100 pieces;
- Approval: UR;

Foto e disegno (dimensioni in mm) / Product image and drawing (dimensions in mm)

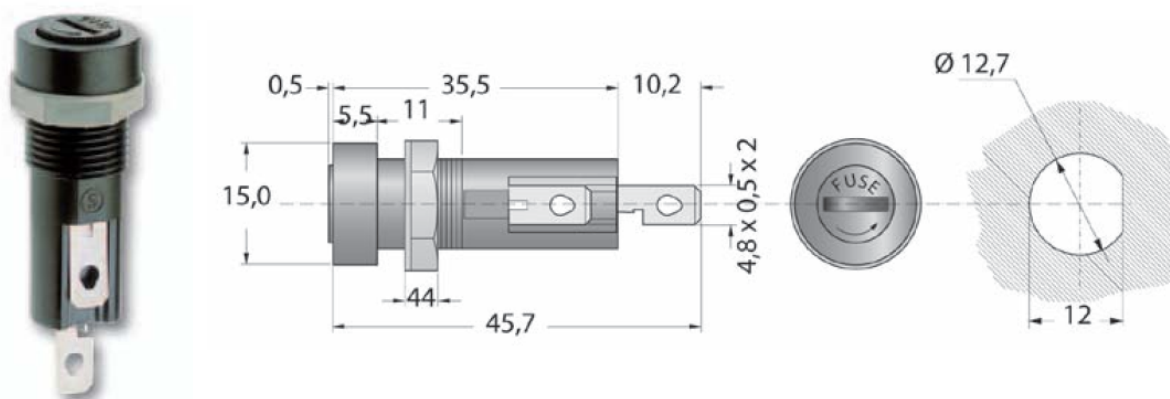

Pagine totali del documento: 1

Document total pages: 1

Ultimo aggiornamento: 7 Novembre 2014

Last updated: 7th November 2014