

FUSIBILI EXTRARAPIDI

Caratteristiche generali:

- Tipo prodotto: fusibili a corpo quadro serie A-69ET;
- Tipologia: fusibili con interasse di fissaggio 110 mm (tipo D1);
- Tensione nominale: 690V AC;
- Dimensioni: A1, A2 e A3;
- Caratteristica d'intervento: gR;
- Conformi alle norme: CEI 32-1, CEI 32-7, IEC 60269-1, IEC 60269-4, DIN 43653;
- Corpo in steatite;
- Contatti in rame argentato;
- Corrente nominale: da 80A a 630A;
- Potere di interruzione: 200kA;
- Con indicatore visivo di fusione;
- Confezione minima: 3 pezzi;

HIGH SPEED FUSES

General characteristics:

- *Product type: square body A-69ET fuses;*
- *Types: fuses with 110 mm distance between fixing holes (D1);*
- *Rated voltage: 690V AC;*
- *Dimensions: A1, A2 and A3;*
- *Time-current characteristic: gR;*
- *Conform to: CEI 32-1, CEI 32-7, IEC 60269-1, IEC 60269-4, DIN 43653;*
- *Steatite body;*
- *Silver plated copper contacts;*
- *Rated current: from 80A to 630A;*
- *Breaking capacity: 200kA;*
- *With visual fuse indication;*
- *Minimum packaging: 3 pieces;*

Foto dei prodotti / Products images




Pagine totali del documento: 6

Document total pages: 6

Ultimo aggiornamento: 2 Febbraio 2015


Last updated: 2nd February 2015



Codici e caratteristiche principali:



Codes and basic characteristics:

grandezza	tipo D1 – Interasse fissaggio 110 mm	In (A)	Vn (V)	caratteristica	conf.
size	type D1 – 110 mm mounting distance			characteristic	pack.
A1-69ET	1747080G	80	690	gR	3
	1747100G	100	690	gR	3
	1747125G	125	690	gR	3
	1747160G	160	690	gR	3
	1747200G	200	690	gR	3
	1747250G	250	690	gR	3
A2-69ET	1748200G	200	690	gR	3
	1748250G	250	690	gR	3
	1748315G	315	690	gR	3
	1748350G	350	690	gR	3
	1748400G	400	690	gR	3
A3-69ET	1749315G	315	690	gR	3
	1748350G	350	690	gR	3
	1749400G	400	690	gR	3
	1749500G	500	690	gR	3
	1749634G	630	690	gR	3

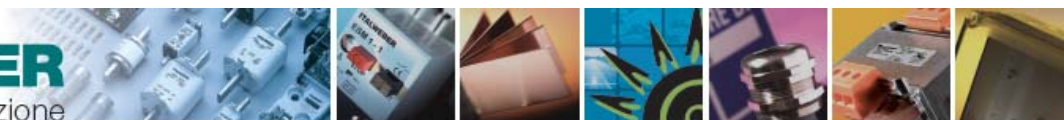


Disegno (dimensioni in mm):

Drawing (dimensions in mm):

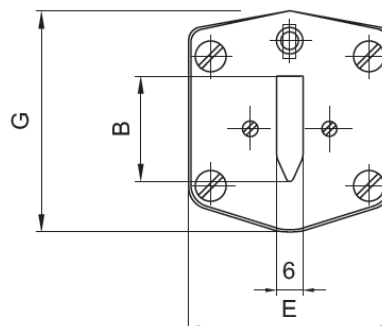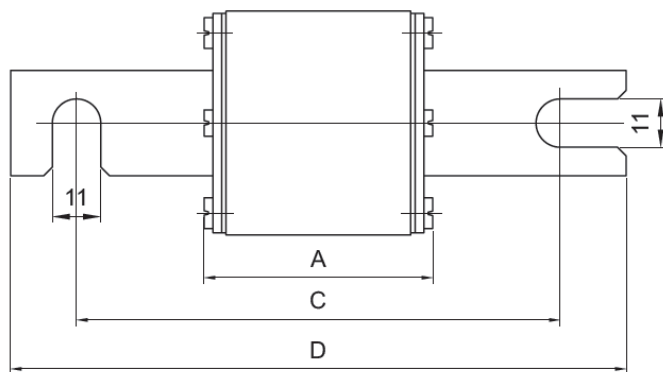


grand. - size	A	B	C	D	E	G
1	72	24	110	140	46	51
2	72	30	110	140	54	59
3	72	37	110	140	64	70

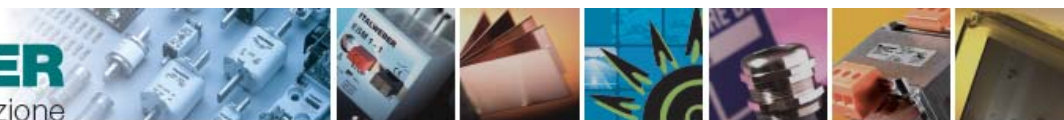

Altre caratteristiche


Other characteristics


grandezza - size	I_n (A)	P_w (W)	I^2t total (A ² s)	I_k (kA)
A1-69ET	80	10	6.200	200
	100	13	10.000	200
	125	18	13.000	200
	160	24	23.000	200
	200	32	47.000	200
	250	43	70.000	200
A2-69ET	200	32	47.000	200
	250	43	70.000	200
	315	57	110.000	200
	350	67	150.000	200
	400	76	170.000	200
A3-69ET	315	57	110.000	200
	350	67	150.000	200
	400	76	170.000	200
	500	102	240.000	200
	630	138	400.000	200

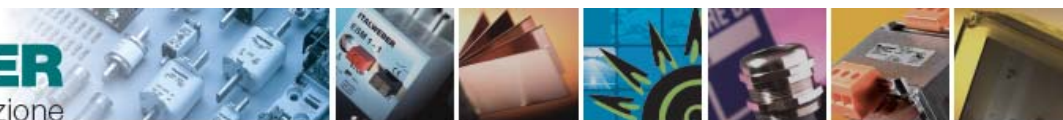

Curve caratteristiche tempo / corrente

Time / current characteristic curves

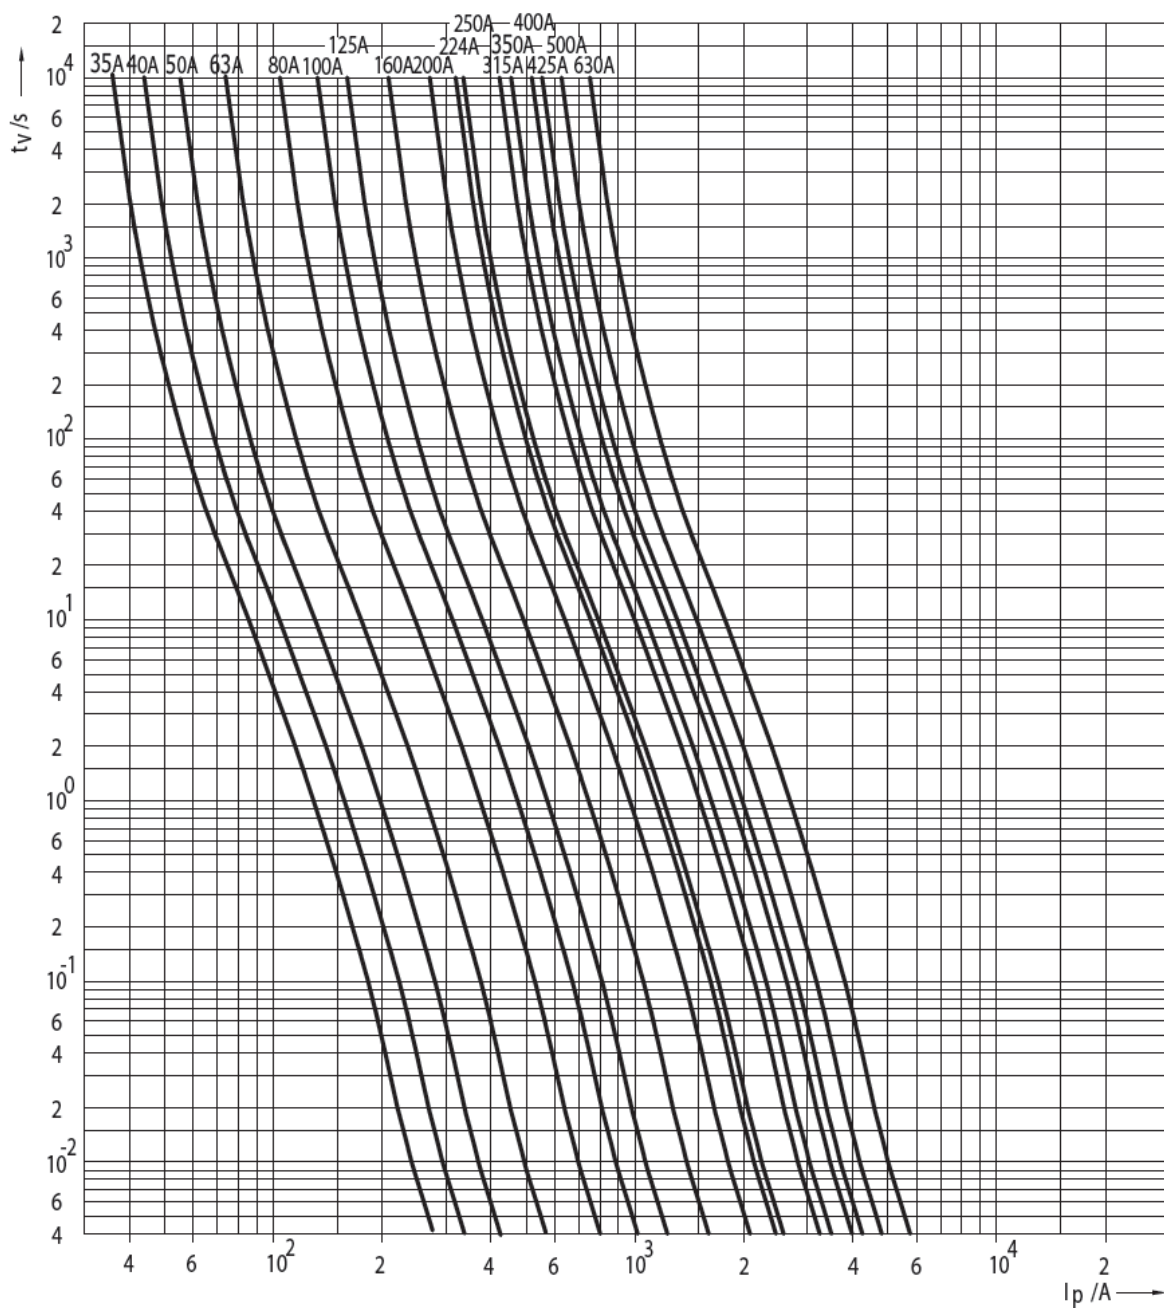

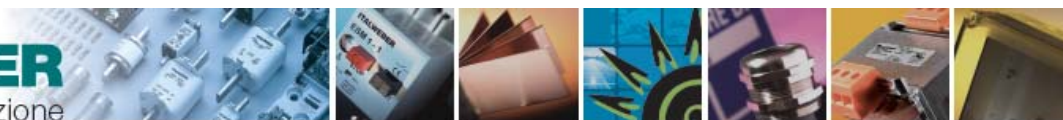

Curve caratteristiche di limitazione

Cut-off characteristic curves

